


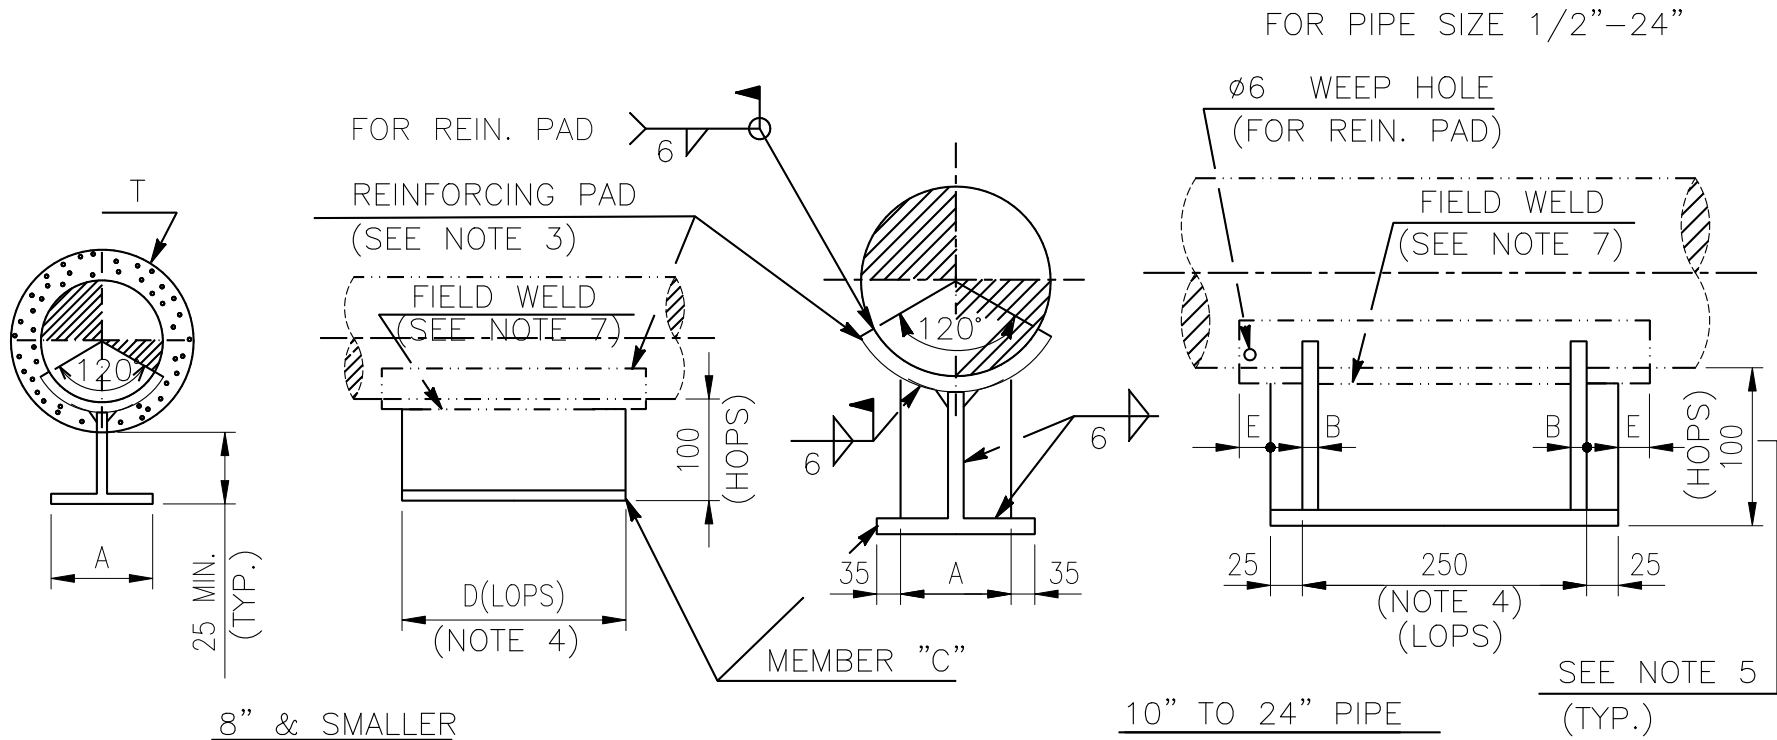

DIMENSION (mm)					
LINE SIZE	A	B	C (NOTE 1)	D (NOTE 4)	E
1/2"	100	—	CUT FROM H-200X100X5.5X8	150	—
3/4"	100	—		150	—
1"	100	—		150	—
1 1/2"	100	—		150	—
2"	100	—		150	50
2 1/2"	100	—		150	50
3"	100	—		250	50
4"	100	—		250	50
5"	100	—		250	50
6"	100	—		250	50
8"	100	—		250	50
10"	130	9	CUT FROM H-200X200X8X12	—	50
12"	130	9		—	50
14"	130	9		—	50
16"	250	12	FAB. FROM 12 ^t PLATE	—	50
18"	250	12		—	50
20"	250	12		—	50
24"	300	12		—	50

NOTES : (FOR SH'T D-80,80A ONLY)

1. SHOES FOR PIPES 1 1/2" & SMALLER MAY BE FABRICATED FROM 6^t PLATE, 2" THRU. 14" FROM 9^t PLATE, 16" THRU. 24" FROM 12^t PLATE
2. DESIGNATION NUMBER DENOTE AS FOLLOWS :
- 66-1 1/2B(P)-A(A)-130-500
- DENOTE TYPE NO. —
- DENOTE LINE SIZE —
- DENOTE REIN. PAD IS REQ'D —
- SEE SH'T D-80A TABLE "A" —
- SEE SH'T D-80A TABLE "B" —
- MODIFY LOPS=500 (IN mm) IF ANY
- MODIFY HOPS=130 (IN mm) IF ANY
3. FOR PADS MATERIAL USE PIPE MATERIAL THAT CUT FROM THE PIPE OR EQUIVALENT TO THE PIPE.
4. LONGITUDINAL LENGTH OF PIPE SHOE (SAY LOPS)
SHALL BE CALCULATED IN THE CASE WITH PIPE STOP.
5. HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-80	
DATE	7/15/'24		APPR.	CHEN			
DETAIL OF PIPE SUPPORT TYPE-66						(1 OF 3)	
						REV. 1	