


FOR LINE SIZE 26"-42"

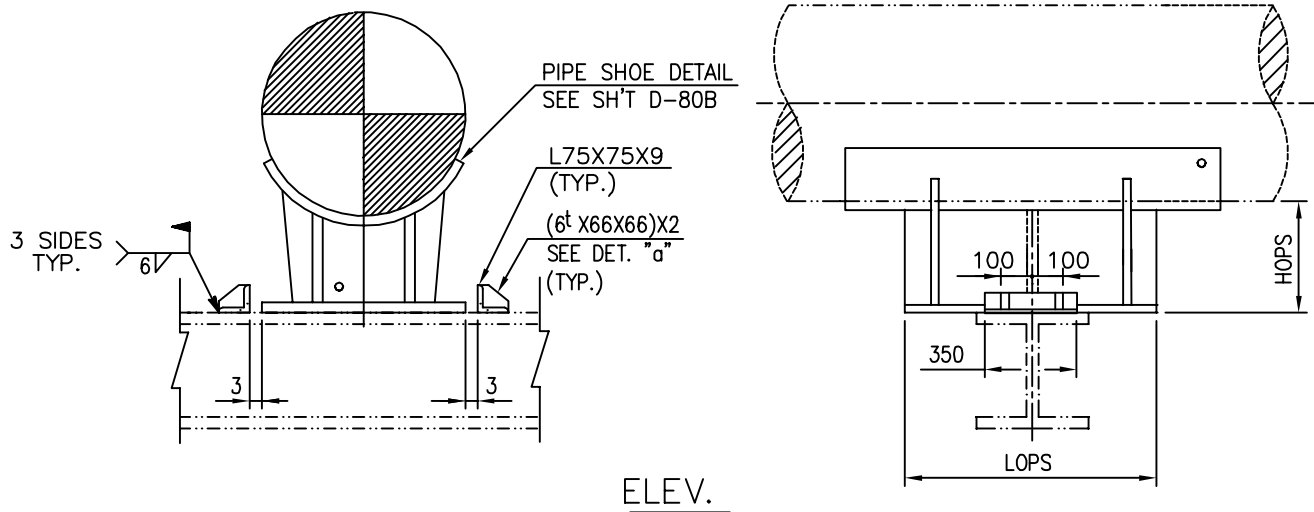

NOTES :

1. FOR DIMENSIONS AND INFORMATION NOT SHOWN ON THIS DWG. SEE SH'T D-80B.
2. DESIGNATION NUMBER DENOTE AS FOLLOWS :

53-30B-A(A)-130-500

DENOTE TYPE NO. ┌───┐ ┌───┐ ┌───┐ ┌───┐
DENOTE LINE SIZE └───┘ └───┘ └───┘ └───┘

MODIFY LOPS=500 (IN mm) IF ANY
MODIFY HOPS=130 (IN mm) IF ANY

SEE NOTE 3 └───┘ └───┘ SEE SH'T D-80A TABLE "B"

3. TYPE—A FOR INSULATION THICKNESS ≤ 100
TYPE—B FOR INSULATION THICKNESS > 100 AND ≤ 150
TYPE—C FOR INSULATION THICKNESS > 150 OR SPECIAL USED
4. LOADING CONDITION: CARBON STEEL SADDLE WITH MAX. LINE TEMPERATURE 371°C
5. HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.



中鼎工程股份有限公司
CTCI CORPORATION

DETAIL OF PIPE SUPPORT
TYPE-53

(2 OF 3)

ENGINEERING STANDARD

D7TS-701-E

D-64A

REV.
1

BY
DATE

CHK.
APPR.