


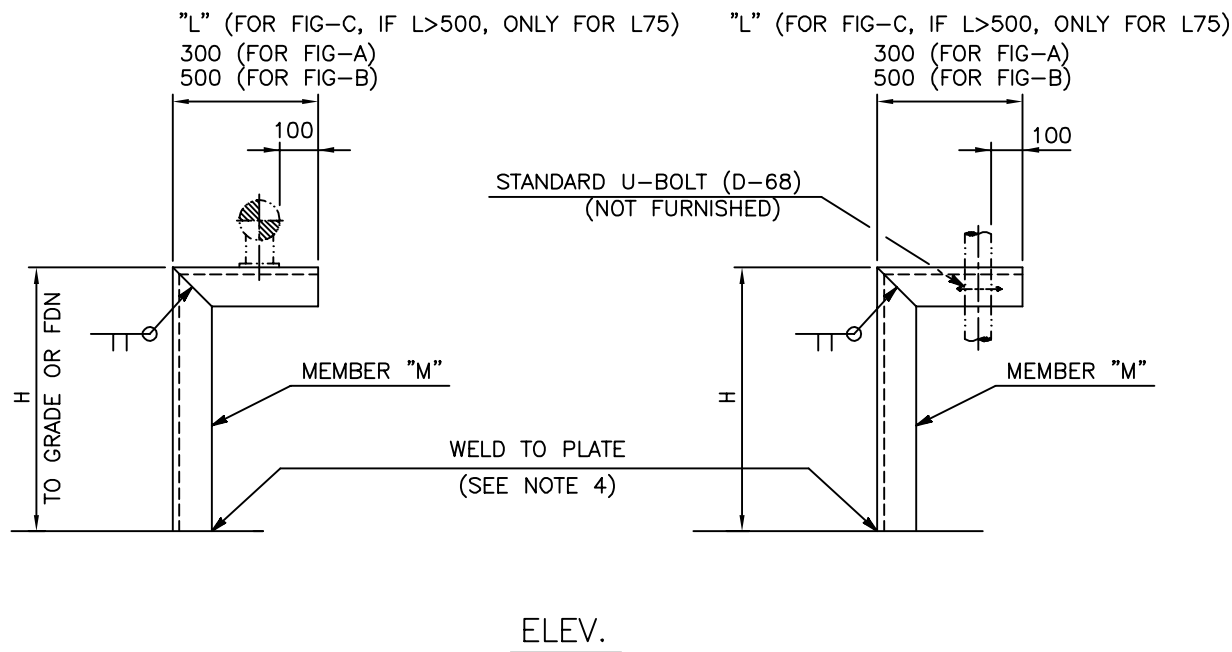

DIMENSIONS (mm)

MEMBER "M"	H (MAX.)	L (MAX.)
L50X50X6	1000	500
L75X75X9	1500	800

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

22-L50-05C-L-07

- DENOTE DIMENSION "L" (IN 100mm) FOR FIG-C ONLY
- DENOTE THE LOWER COMPONENT TYPE SEE M-42.
- DENOTE FIG. NO.
- DENOTE DIMENSION "H" (IN 100 mm)
- DENOTE MEMBER "M"
- DENOTE TYPE NO.

2. DIMENSION "H" SHALL BE CUT TO SUIT IN FIELD .

3. IF THE FOUNDATION IS NOT USED IN THIS DETAIL, DIMENSION "H" SHALL BE COUNTED FROM THE ELEVATION OF THE LOWEST POINT OF PAVING.

4. THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE. IN THIS DETAIL, USE TYPE L & P & T ONLY.

D-024M.DWG

CTCI 中鼎工程股份有限公司 俊鼎機械廠股份有限公司	DETAIL OF PIPE SUPPORT TYPE-22 (1 OF 1)	ENGINEERING STANDARD	
		STM-05.01	
BY		CHK.	
DATE		APPR.	
		D-24	REV. 1