


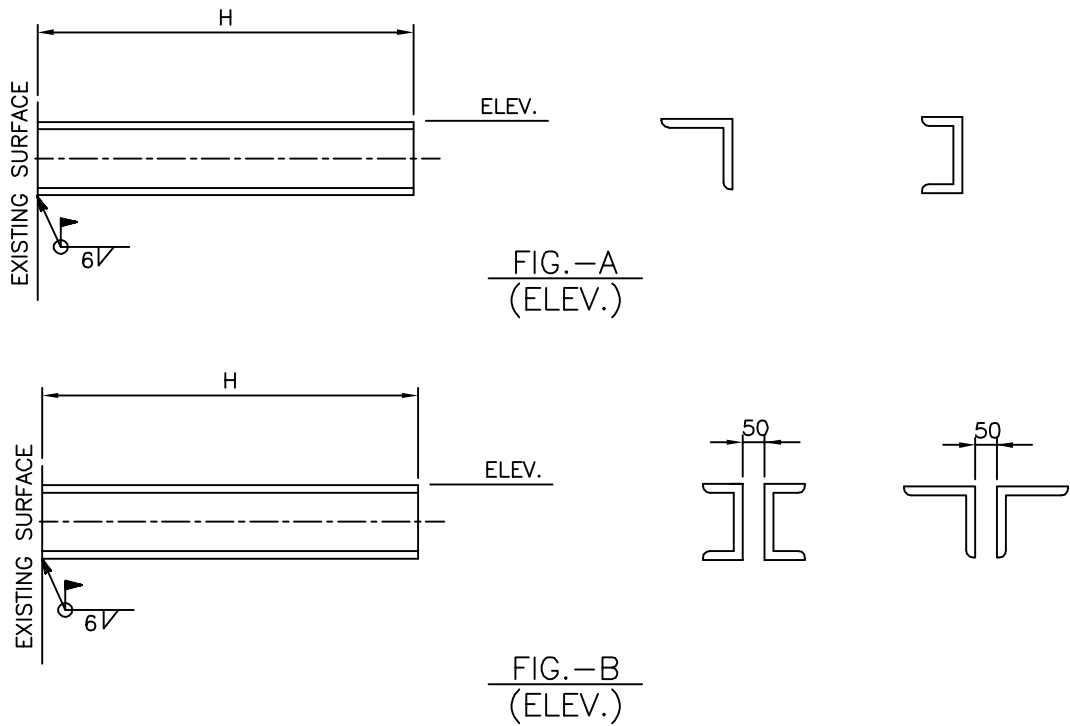

DIMENSIONS (mm)

| MEMBER "M" | H (FOR FIG.-A)<br>(MAX.) | H (FOR FIG.-B)<br>(MAX.) |
|------------|--------------------------|--------------------------|
| L50X50X6   | 600                      | NOTE 2                   |
| L75X75X9   | 800                      | 900                      |
| C100X50X5  | 1200                     | 900                      |
| C125X65X6  | 1400                     | 900                      |
| C150X75X9  | 1400                     | NOTE 2                   |

- NOTE :
1. DESIGNATION NUMBER DENOTE AS FOLLOWS :
- 35-C125-05A
- DENOTE FIG. NO.
  - DENOTE DIMENSION "H" (IN 100mm)
  - DENOTE MEMBER "M"
  - DENOTE TYPE NO.
2. FOR MEMBER "L50X50X6", "C150X75X9" USE FIG-A ONLY.

D-040M.DWG

|                                                 |  |  |       |  |  |                      |           |
|-------------------------------------------------|--|--|-------|--|--|----------------------|-----------|
| <b>CTCI</b> 中鼎工程股份有限公司<br>俊鼎機械廠股份有限公司           |  |  |       |  |  | ENGINEERING STANDARD |           |
| DETAIL OF PIPE SUPPORT<br>TYPE-35<br>( 1 OF 1 ) |  |  |       |  |  | STM-05.01            |           |
|                                                 |  |  |       |  |  | D-40                 | REV.<br>1 |
|                                                 |  |  |       |  |  |                      |           |
| BY                                              |  |  | CHK.  |  |  |                      |           |
| DATE                                            |  |  | APPR. |  |  |                      |           |