


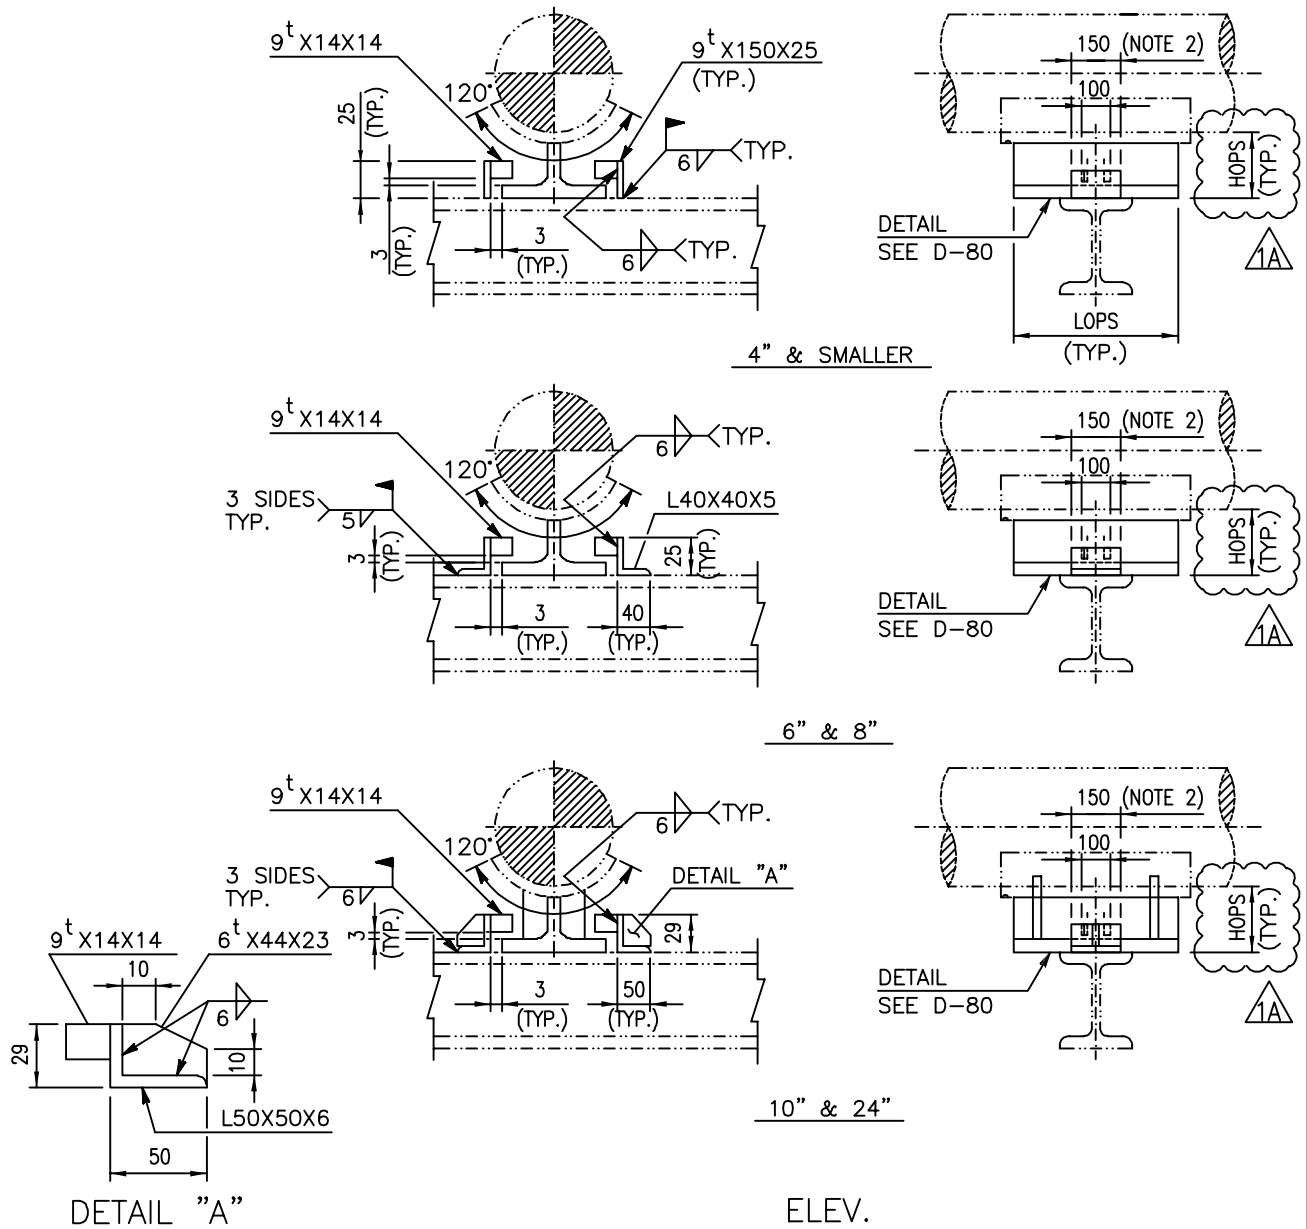

NOTES : (FOR SH'T D-63 ONLY)

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

52-2B(P)-A(A)-130-500

DENOTE TYPE NO. ————

DENOTE LINE SIZE ————

MODIFY LOPS=500 (IN mm) IF ANY

MODIFY HOPS=130 (IN mm) IF ANY

SEE SH'T D-80A TABLE "B", SEE NOTE 4.

SEE SH'T D-80A TABLE "A"

DENOTE REIN. PAD IS REQ'D, SEE NOTE 4.

2. THE MAX. LENGTH OF THIS MEMBER SHALL NOT EXCEED THE WIDTH OF BEAM.

3. HOPS=HEIGHT OF PIPE SHOE
LOPS=LENGTH OF PIPE SHOE

4. FOR ALLOY STEEL, STAINLESS STEEL & STRESS RELIEF LINES, PAD SHALL BE FABRICATED WITH MAIN LINES IN SHOP WITH SAME MATERIAL AS MAIN LINES, AND THE PAD MATERIAL IS MATERIAL TAKE OFF BY PIPING ISO DWG.

D-063M.DWG

CTCI中鼎工程股份有限公司
俊鼎機械廠股份有限公司

DETAIL OF PIPE SUPPORT

TYPE-52

(1 OF 1)

ENGINEERING STANDARD

STM-05.01

D-63

REV.
1A