


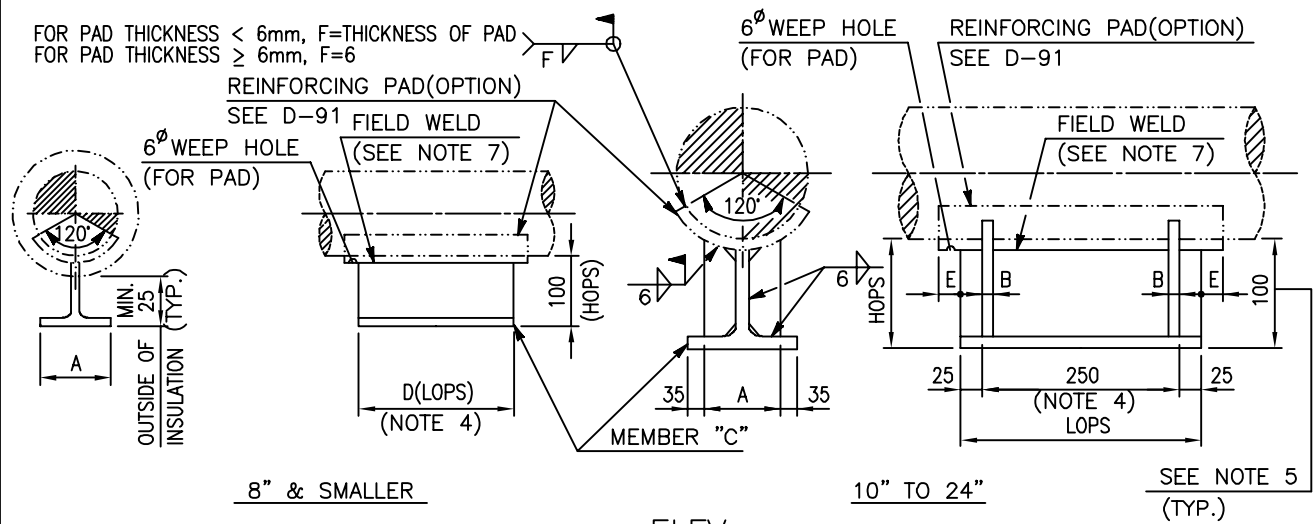

DIMENSION (mm)

LINE SIZE	A	B	C (NOTE 1)	D (NOTE 4)	E
1/2"	100	—	CUT FROM H-200X100X5.5X8	150	15
3/4"	100	—		150	15
1"	100	—		150	15
1 1/2"	100	—		150	15
2"	100	—		150	15
2 1/2"	100	—		150	15
3"	100	—		250	15
4"	100	—		250	15
5"	100	—		250	15
6"	100	—		250	15
8"	100	—		250	15
10"	130	9	CUT FROM H-200X200X8X12	—	15
12"	130	9		—	15
14"	130	9		—	15
16"	250	12	FAB. FROM 12 ^t PLATE	—	15
18"	250	12		—	15
20"	250	12		—	15
24"	300	12		—	15

NOTES : (FOR SH'T D-80, 80A ONLY)

- SHOES FOR PIPES 1 1/2" & SMALLER MAY BE FABRICATED FROM 6t PLATE, 2" THRU. 14" FROM 9t PLATE, 16" THRU. 24" FROM 12t PLATE.
- DESIGNATION NUMBER DENOTE AS FOLLOWS :

66-1 1/2B(P)-A(A)-130-500

DENOTE TYPE NO.

DENOTE LINE SIZE

DENOTE REIN. PAD IS REQ'D

SEE SH'T D-80A TABLE "A"

MODIFY LOPS=500 (IN mm) IF ANY

MODIFY HOPS=130 (IN mm) IF ANY

SEE SH'T D-80A TABLE "B"

- FOR PADS MATERIAL USE PIPE MATERIAL THAT CUT FROM THE PIPE OR EQUIVALENT TO THE PIPE.
- LONGITUDINAL LENGTH OF PIPE SHOE (SAY LOPS) SHALL BE CALCULATED IN THE CASE WITH PIPE STOP.
- HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.

D-080M.DWG

CTCI

中鼎工程股份有限公司
俊鼎機械廠股份有限公司

DETAIL OF PIPE SUPPORT

TYPE-66

(1 OF 3)

ENGINEERING STANDARD

STM-05.01

D-80

REV.
1A

BY

CHK.

DATE

APPR.