

**GENERAL****Operational Hours****ATS Hours:** TWR MON-FRI 1300-2130±

TWR may be open other than published hours, monitor CTAF at all times.

**AD OPS Hours:** Attended 1300-2300±, other times by NOTAM**Airport Information****RFF:** Not published**Fuel:** Jet A**PCN:** Not published**Operation****Traffic Notes**

RWY and APCH lights are turned off when TWR CLSD, thereafter activation by CTAF.

**ARRIVAL****Speed**

MAX IAS 250KT below 10000ft.

**Communication****COM Failure:** See CRAR.**Arrival Procedure****VFR Traffic Pattern:** RWY 28 right-hand circuit.**DEPARTURE****Take-off Minima**

RWY		05/23, 10/28	
1+2 ENG	ft - ft/SM	0 - 1.0V	-
3+4 ENG		0 - 0.5V	-

**Speed**

MAX IAS 250KT below 10000ft.

**Communication****COM Failure:** See CRAR.

03-MAY-2018  
LCQ-KLCQ

United States **Lake City** Lake City Gateway


AGC  
AFC

AFC

AFC


Lake City Gateway **Lake City** United States

AGC  
AFC

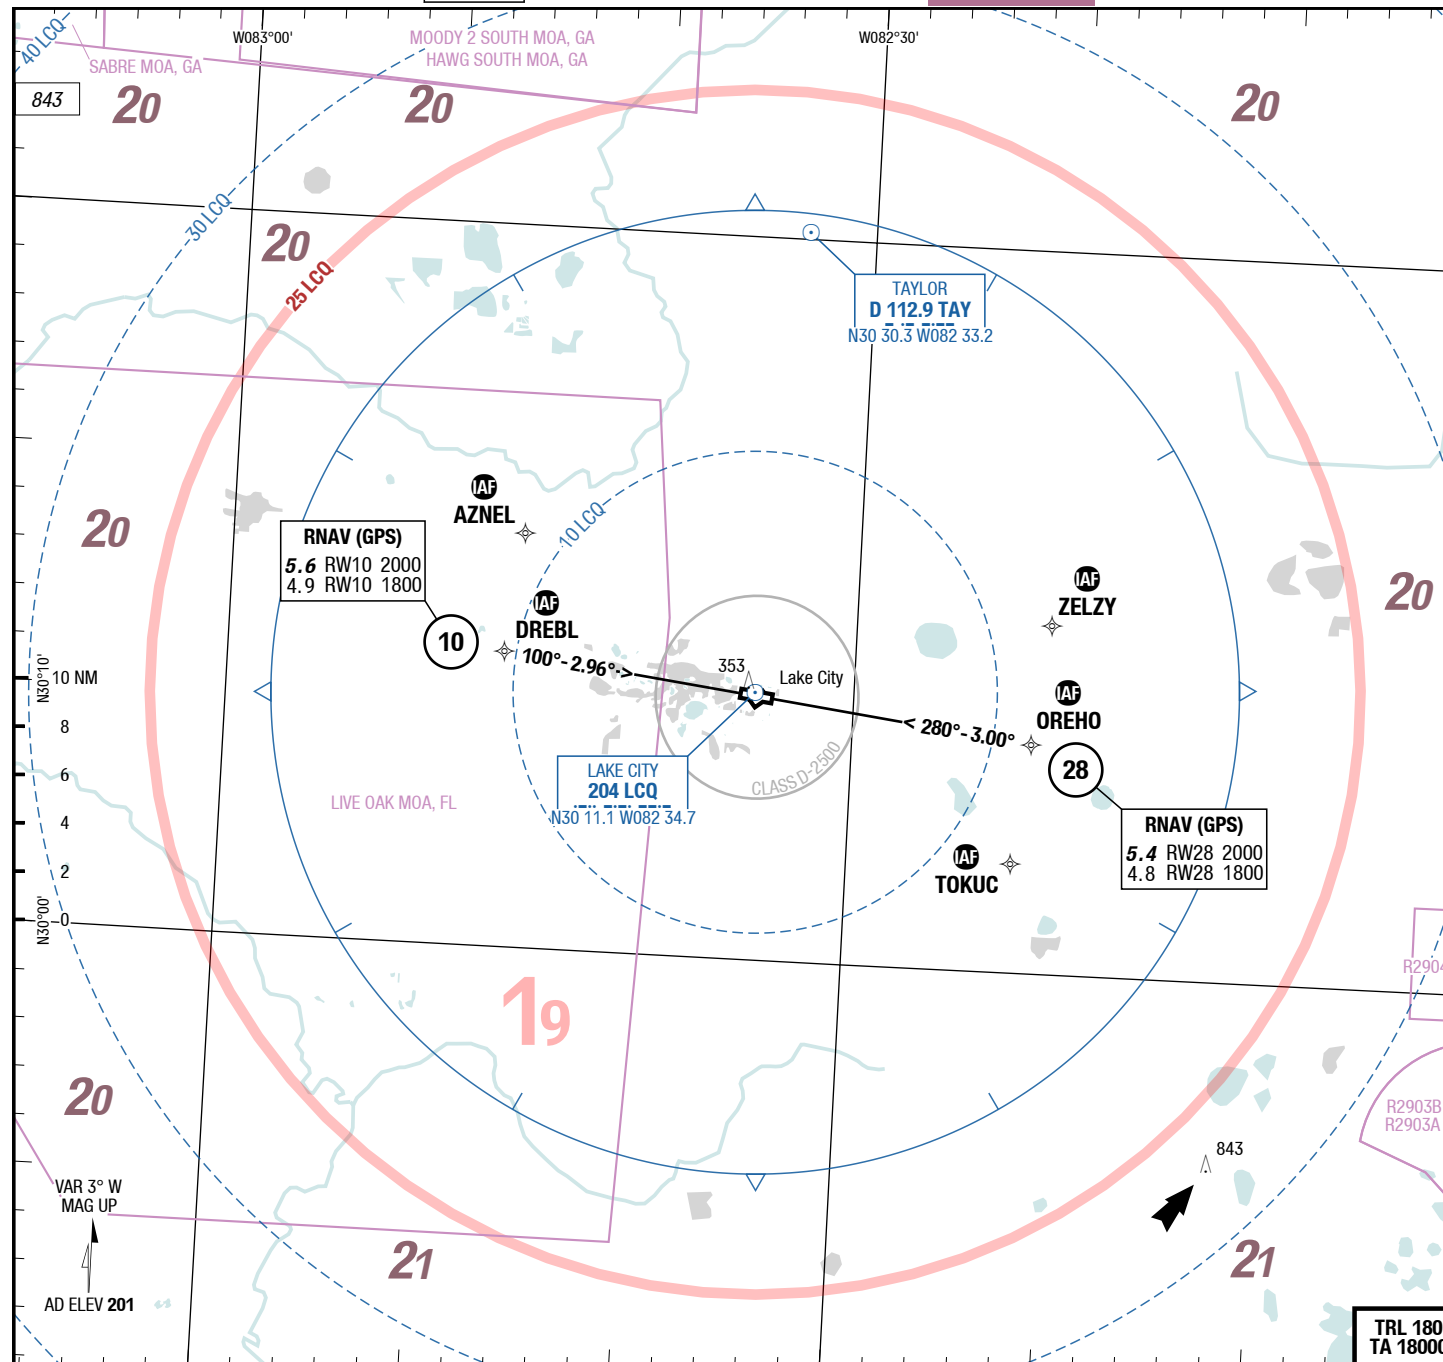

AWOS	120.675
Jacksonville APP/DEP	125.375
TWR	119.200 Mon-Fri 1300-2130†
CTAF	119.200
Unicom	122.950
GND	121.900
RCO	122.600 Gainesville RDO

Landing RWY system:

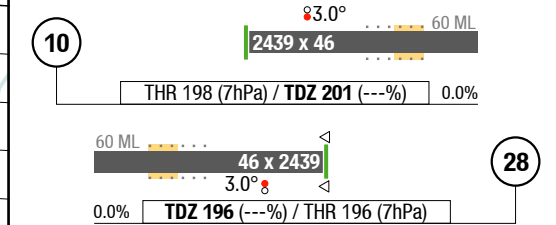

Changes: Nil

03-MAY-2018  
LCQ-KLCQ

United States **Lake City** Lake City Gateway


AGC

AGC

AGC

Lake City Gateway **Lake City** United States

3-20

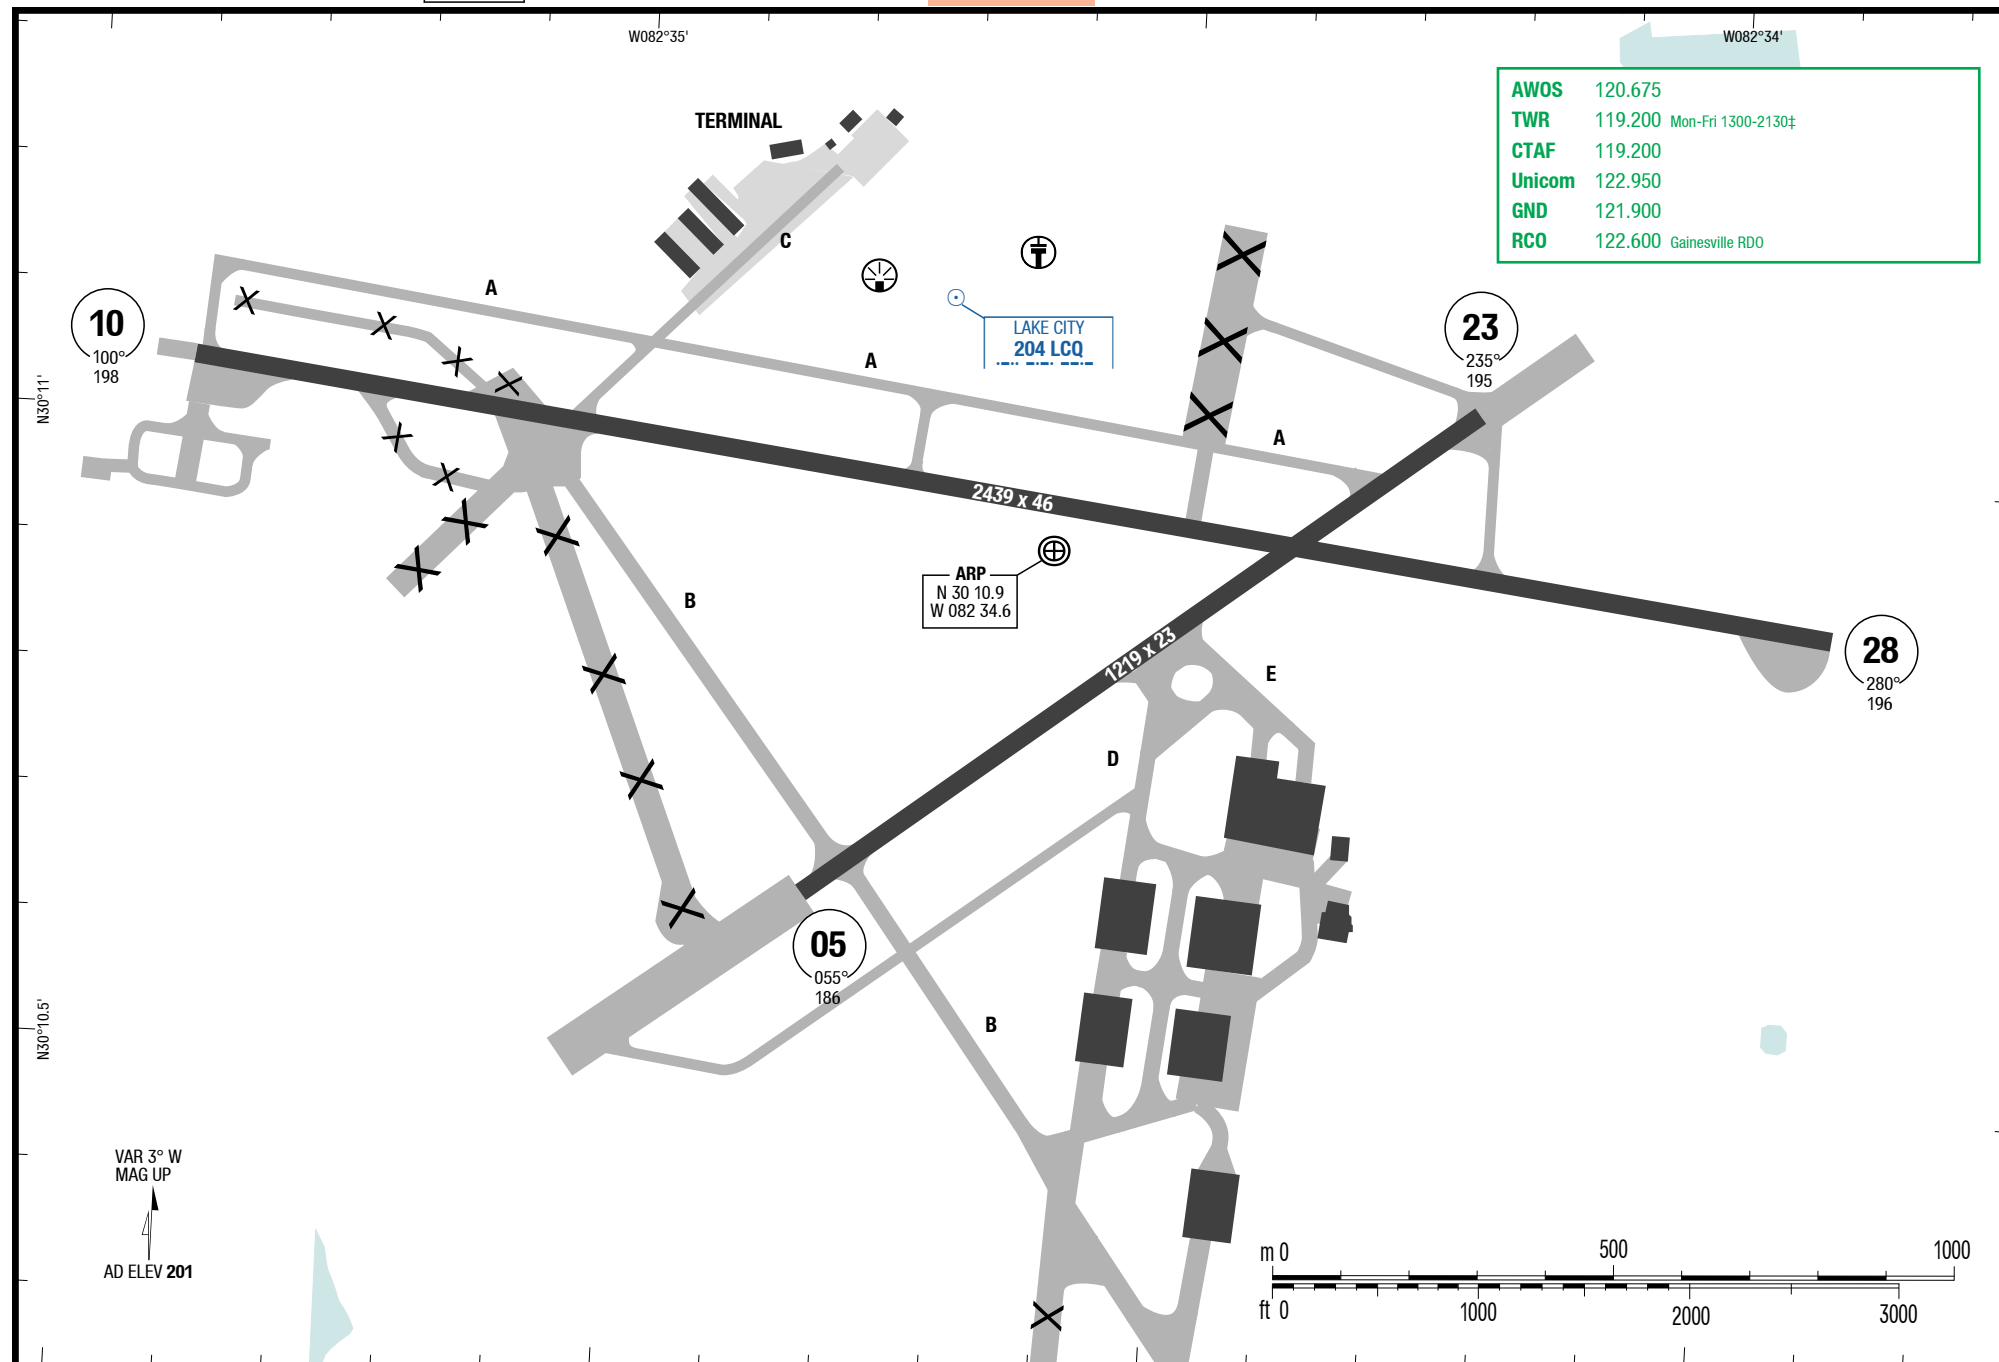


Changes: Nil

03-MAY-2018

**LCQ-KLCQ****5-10****Obstacle Departure****SIDPT**


<b>Obstacle Departure</b>	
<b>RWY</b>	<b>Notes</b>
<b>05</b>	Trees beginning 1358ft from DER, 522ft right of centerline, up to 100ftAGL/294ft MSL.
<b>10</b>	Trees beginning 2490ft from DER, 32ft right of centerline, up to 94ft AGL/284ft MSL. Trees beginning 84ft from DER, 58ft left of centerline, up to 83ft AGL/273ft MSL.
<b>23</b>	Trees beginning 575ft from DER, 363ft right of centerline, up to 100ft AGL/285ft MSL. Trees beginning 1139ft from DER, 88ft left of centerline, up to 100ft AGL/285ft MSL.
<b>28</b>	Trees, pole and tower beginning 1001ft from DER, 23ft right of centerline, up to 158ft AGL/350ft MSL. Trees beginning 981ft from DER, 4ft left of centerline, up to 94ft AGL/292ft MSL.

## RNAV (GPS) 10

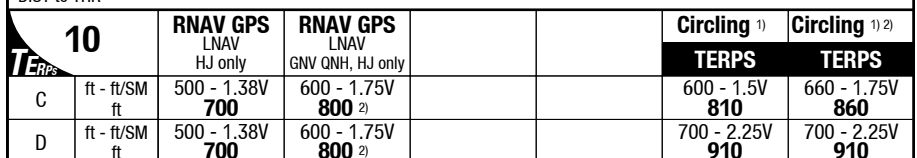

© Lido 2018

## RNAV (GPS) 28

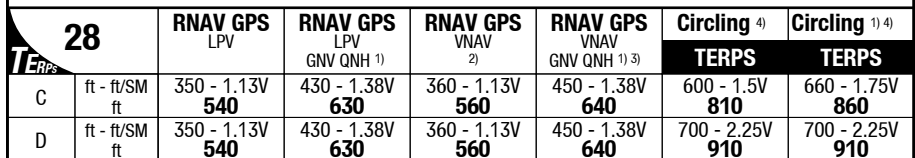


© Lido 2018

03-MAY-2018


LCQ-KLCQ

7-30

NDB 28

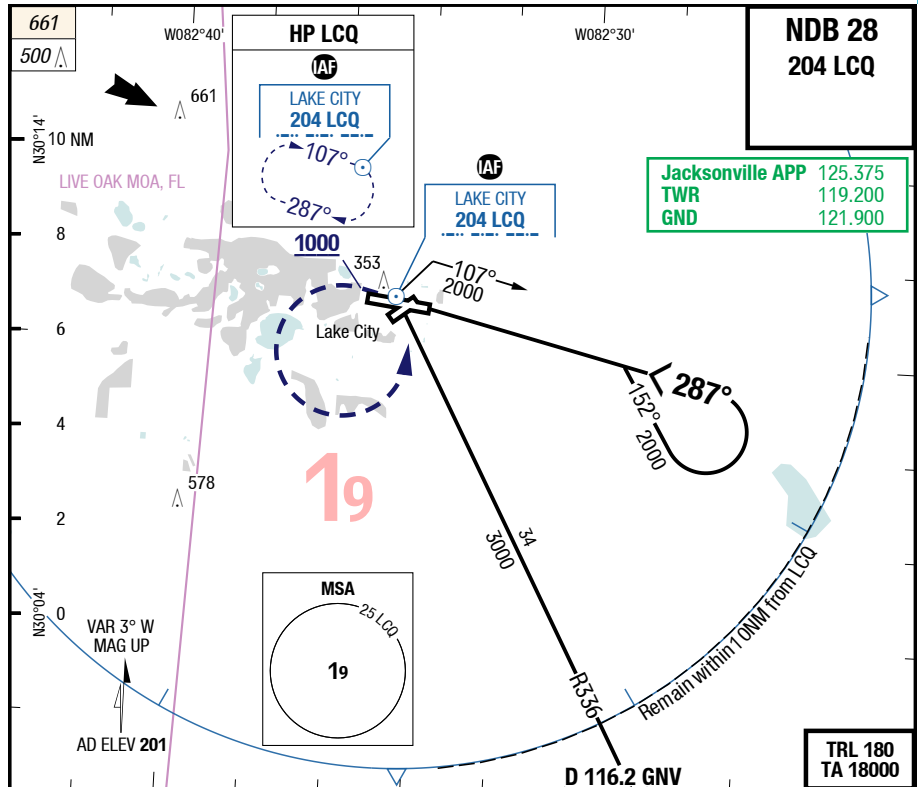

60 ML	46 x 2439	3.0°	28	2	3	4	5	5.5	3.00°
0.0%	TDZ 196 (---%) / THR 196 (7hPa)			890	1210	1520	1840	2000	RW28
									287°
									RWY 280°

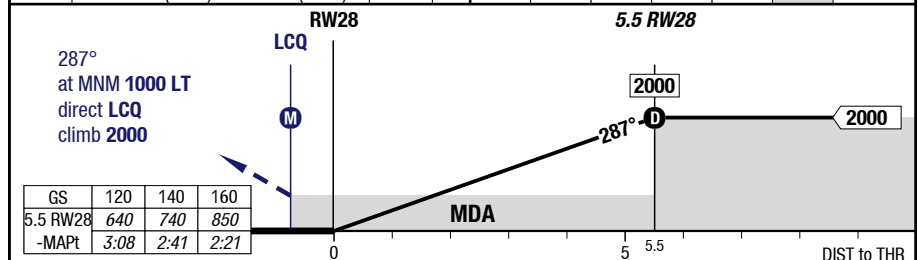

28	NDB	NDB GNV QNH 1)		Circling 2) TERPS	Circling 1) 2) TERPS
C	ft - ft/SM ft	570 - 1.75V 760	670 - 2.0V 860	600 - 1.75V 810	670 - 2.0V 870
D	ft - ft/SM ft	570 - 1.75V 760	670 - 2.0V 860	700 - 2.25V 910	700 - 2.25V 910

1) Use with Gainesville (KGNV) QNH  
2) To RWY 10 HJ only

<b>28</b> <i>TERPS</i>		<b>RNAV GPS</b> LNAV	<b>RNAV GPS</b> LNAV GNV QNH <sup>1)</sup>				
C	ft - ft/SM ft	450 - 1.38V <b>640</b>	550 - 1.75V <b>740</b>				
D	ft - ft/SM ft	450 - 1.38V <b>640</b>	550 - 1.75V <b>740</b>				
1) Use with Gainesville (KGNV) QNH							