

# **全封闭微型压缩机(参考)规格书**

## **Enclosed miniature compressor specification (reference)**

机种型名 Model type name : ZH2048A

**广东高品压缩机有限公司**  
**Guangdong GREATCOOL Compressor co., LTD**  
**广东省广州市番禺区钟创路 72 号**

**Add: No. 72 Zhongchuang Rd., shibi, panyu, Guagnzhou Guangdong**

## 1. 规格 Specification

### 1.1 基本参数 Basic parameters

|                                                |                                               |
|------------------------------------------------|-----------------------------------------------|
| 压缩机型式<br>Compressor Type                       | 全封闭电动旋转式压缩机<br>Closed rotary compressor motor |
| 使用冷媒 Use refrigerant                           | R134a                                         |
| 润滑油·油量 (ml)<br>Lubricating oil·Oil amount (ml) | P0E 68 · 40ml                                 |
| 冷却方式 cooling                                   | Fan cooling 1m/s                              |
| 总质量 (含润滑油)<br>The total mass ( including oil ) | 700g                                          |
| 排除容积 Excluded volume                           | 1.9cm <sup>3</sup> /rev                       |
| 电机型式 Motor Type                                | 直流无刷电机 Brushless DC Motor                     |
| 转速范围 Speed range                               | 1800-6000rpm                                  |
| 使用电压 Voltage                                   | DC 48V                                        |
| 电流范围 Current Range                             | Max6.5A                                       |

### 1.2 性能 Performance

| 项目<br>Category                         | 空调用测试工况<br>Test conditions for air conditioning |         |         |         |
|----------------------------------------|-------------------------------------------------|---------|---------|---------|
|                                        | 3000rpm                                         | 3600rpm | 4500rpm | 5100rpm |
| 冷冻能力 (W)<br>Refrigerating capacity (W) | 245                                             | 305     | 375     | 425     |
| 输入功率 (W)<br>The input power (W)        | 85                                              | 100     | 120     | 135     |
| COP (W/W)                              | 2.90                                            | 3.05    | 3.10    | 3.15    |

附：空调用压缩机性能测试条件

Attachment: Air conditioning compressor performance test conditions

- 额定电压 The rated voltage DC 48V
- 转速控制 Speed control 高品压缩机专用控制器  
The Greatcool compressor dedicated controller
- 冷凝温度 Condensation temperature 46.0℃
- 蒸发温度 Evaporation temperature 10.0℃
- 吸气温度 Breathe in temperature 18.0℃

- 过冷温度 Too cold temperature 40.0℃
- 环境温度 The environment temperature 35.0℃

| 项目<br>Category                         | 中低温测试工况<br>Test conditions for air conditioning |         |         |
|----------------------------------------|-------------------------------------------------|---------|---------|
|                                        | 3000rpm                                         | 3600rpm | 4500rpm |
| 冷冻能力 (W)<br>Refrigerating capacity (W) | 72                                              | 90      | 108     |
| 输入功率 (W)<br>The input power (W)        | 60                                              | 72      | 80      |
| COP (W/W)                              | 1.20                                            | 1.25    | 1.35    |

附：中低温压缩机性能测试条件

Attachment: Air conditioning compressor performance test conditions

- 额定电压 The rated voltage DC 48V
- 转速控制 Speed control 高品压缩机专用控制器  
The Greatcool compressor dedicated controller
- 冷凝温度 Condensation temperature 45.0℃
- 蒸发温度 Evaporation temperature -20.0℃
- 吸气温度 Breathe in temperature 27.0℃
- 过冷温度 Too cold temperature 32.0℃
- 环境温度 The environment temperature 27.0℃
- 强制风冷 Forced air cooling

噪音规格：

| 项目<br>Category            | 空调用测试工况<br>Test conditions for air conditioning |         |
|---------------------------|-------------------------------------------------|---------|
|                           | 3000rpm                                         | 4500rpm |
| 噪音 (dB)<br>The noise (dB) | 48                                              | 52      |

附：空调用压缩机性能测试条件


Attachment: Air conditioning compressor performance test conditions

- 额定电压 The rated voltage DC 48V
- 转速控制 Speed control 高品压缩机专用控制器（180°正弦波控制）  
The Greatcool compressor dedicated controller  
(180 DHS sine wave control)
- 冷凝温度 Condensation temperature 46.0℃
- 蒸发温度 Evaporation temperature 10.0℃
- 吸气温度 Breathe in temperature 18.0℃
- 过冷温度 Too cold temperature 40.0℃
- 环境温度 The environment temperature 35.0℃

- 测试位置: 压缩机正上方 30cm 处

Test location: compressor is 30 cm above

### 1.3. 压缩机外观 Compressor appearance

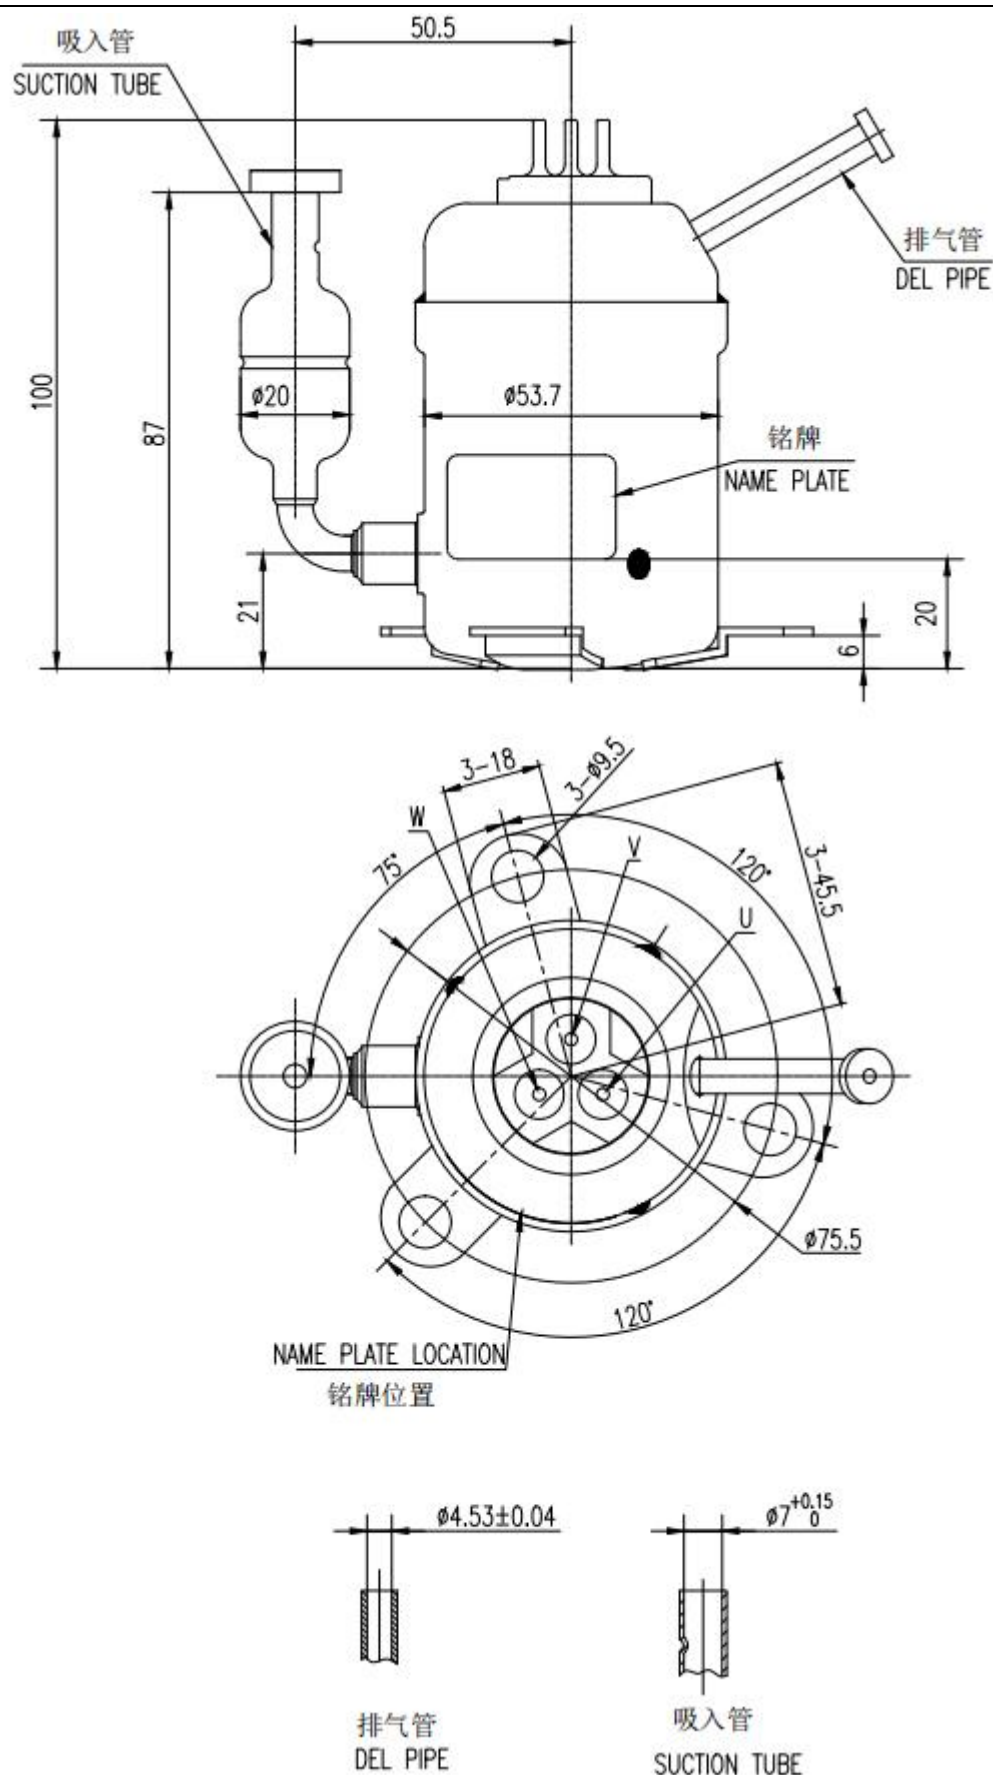

## 2. 压缩机标准附件一览 Compressor in standard accessories


### 2.1 标准附件一览表 List of standard accessories

| 序号<br>The serial<br>number | 品名<br>Part name                        | 型号<br>Model | 数量<br>Amount | 备注<br>Remark |
|----------------------------|----------------------------------------|-------------|--------------|--------------|
| 2.1                        | 减振橡胶垫<br>Damping rubber mat            |             | 3            |              |
| 2.2                        | 压缩机驱动器<br>Drive Board                  |             | 1            |              |
| 2.3                        | 压缩机控制板<br>The compressor control panel |             | 1            |              |



※请用广东高品公司之指定压缩机零部件和附件。

Please use the Guangdong Greatcool company specified compressor parts and accessories.

## 2.2 减振橡胶垫 Damping rubber mat

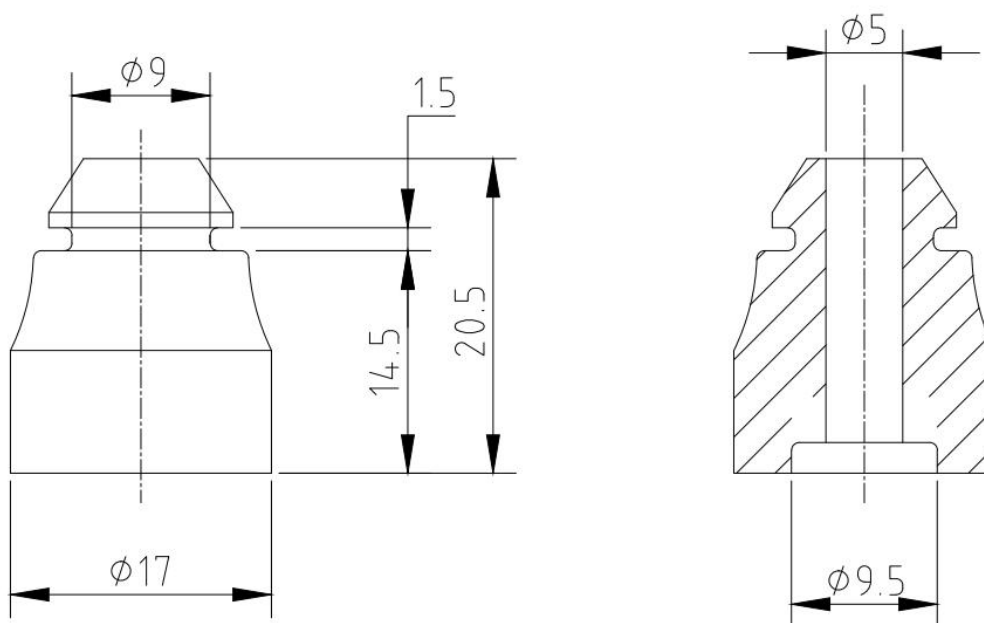

## 2.3 安装减振橡胶垫 Mounting damping rubber mat

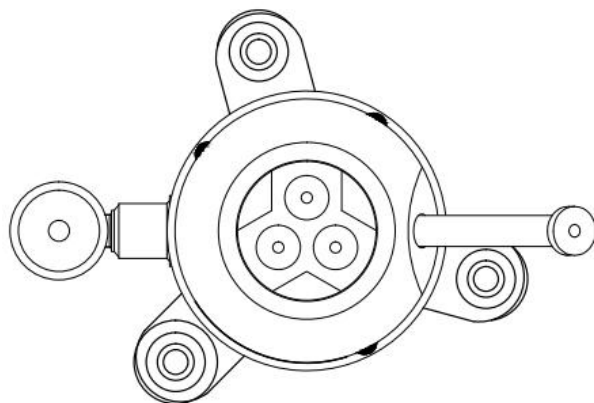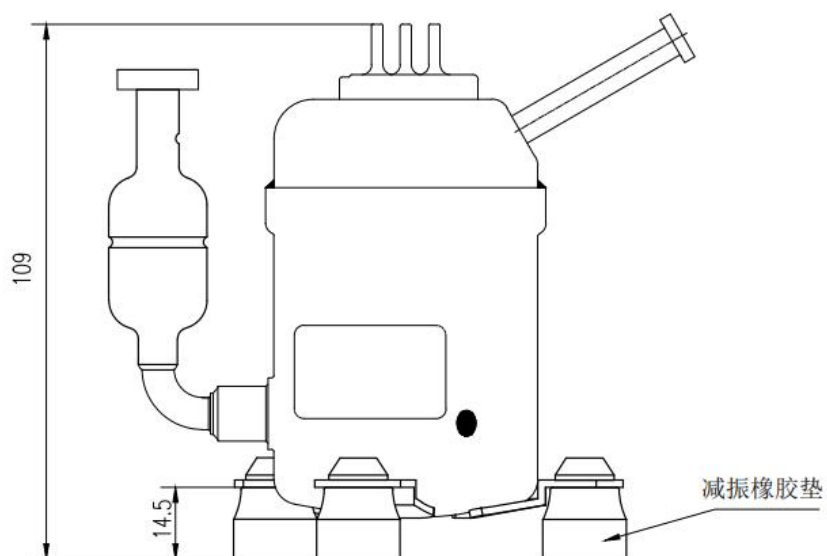

## 2.4 驱动器安装尺寸: Drive Board Dimension Diagram

