

UKAS QUALITY MANAGEMENT 005

SYSTEM CERTIFICATION ISO 9001:2008 SGS

ACROW


Formwork Technology


Acrow Alu Prop

ACROW MISR Provides Full Site Service Based On More Than 35 Years Experience In The Field

ACROW

Formwork Technology

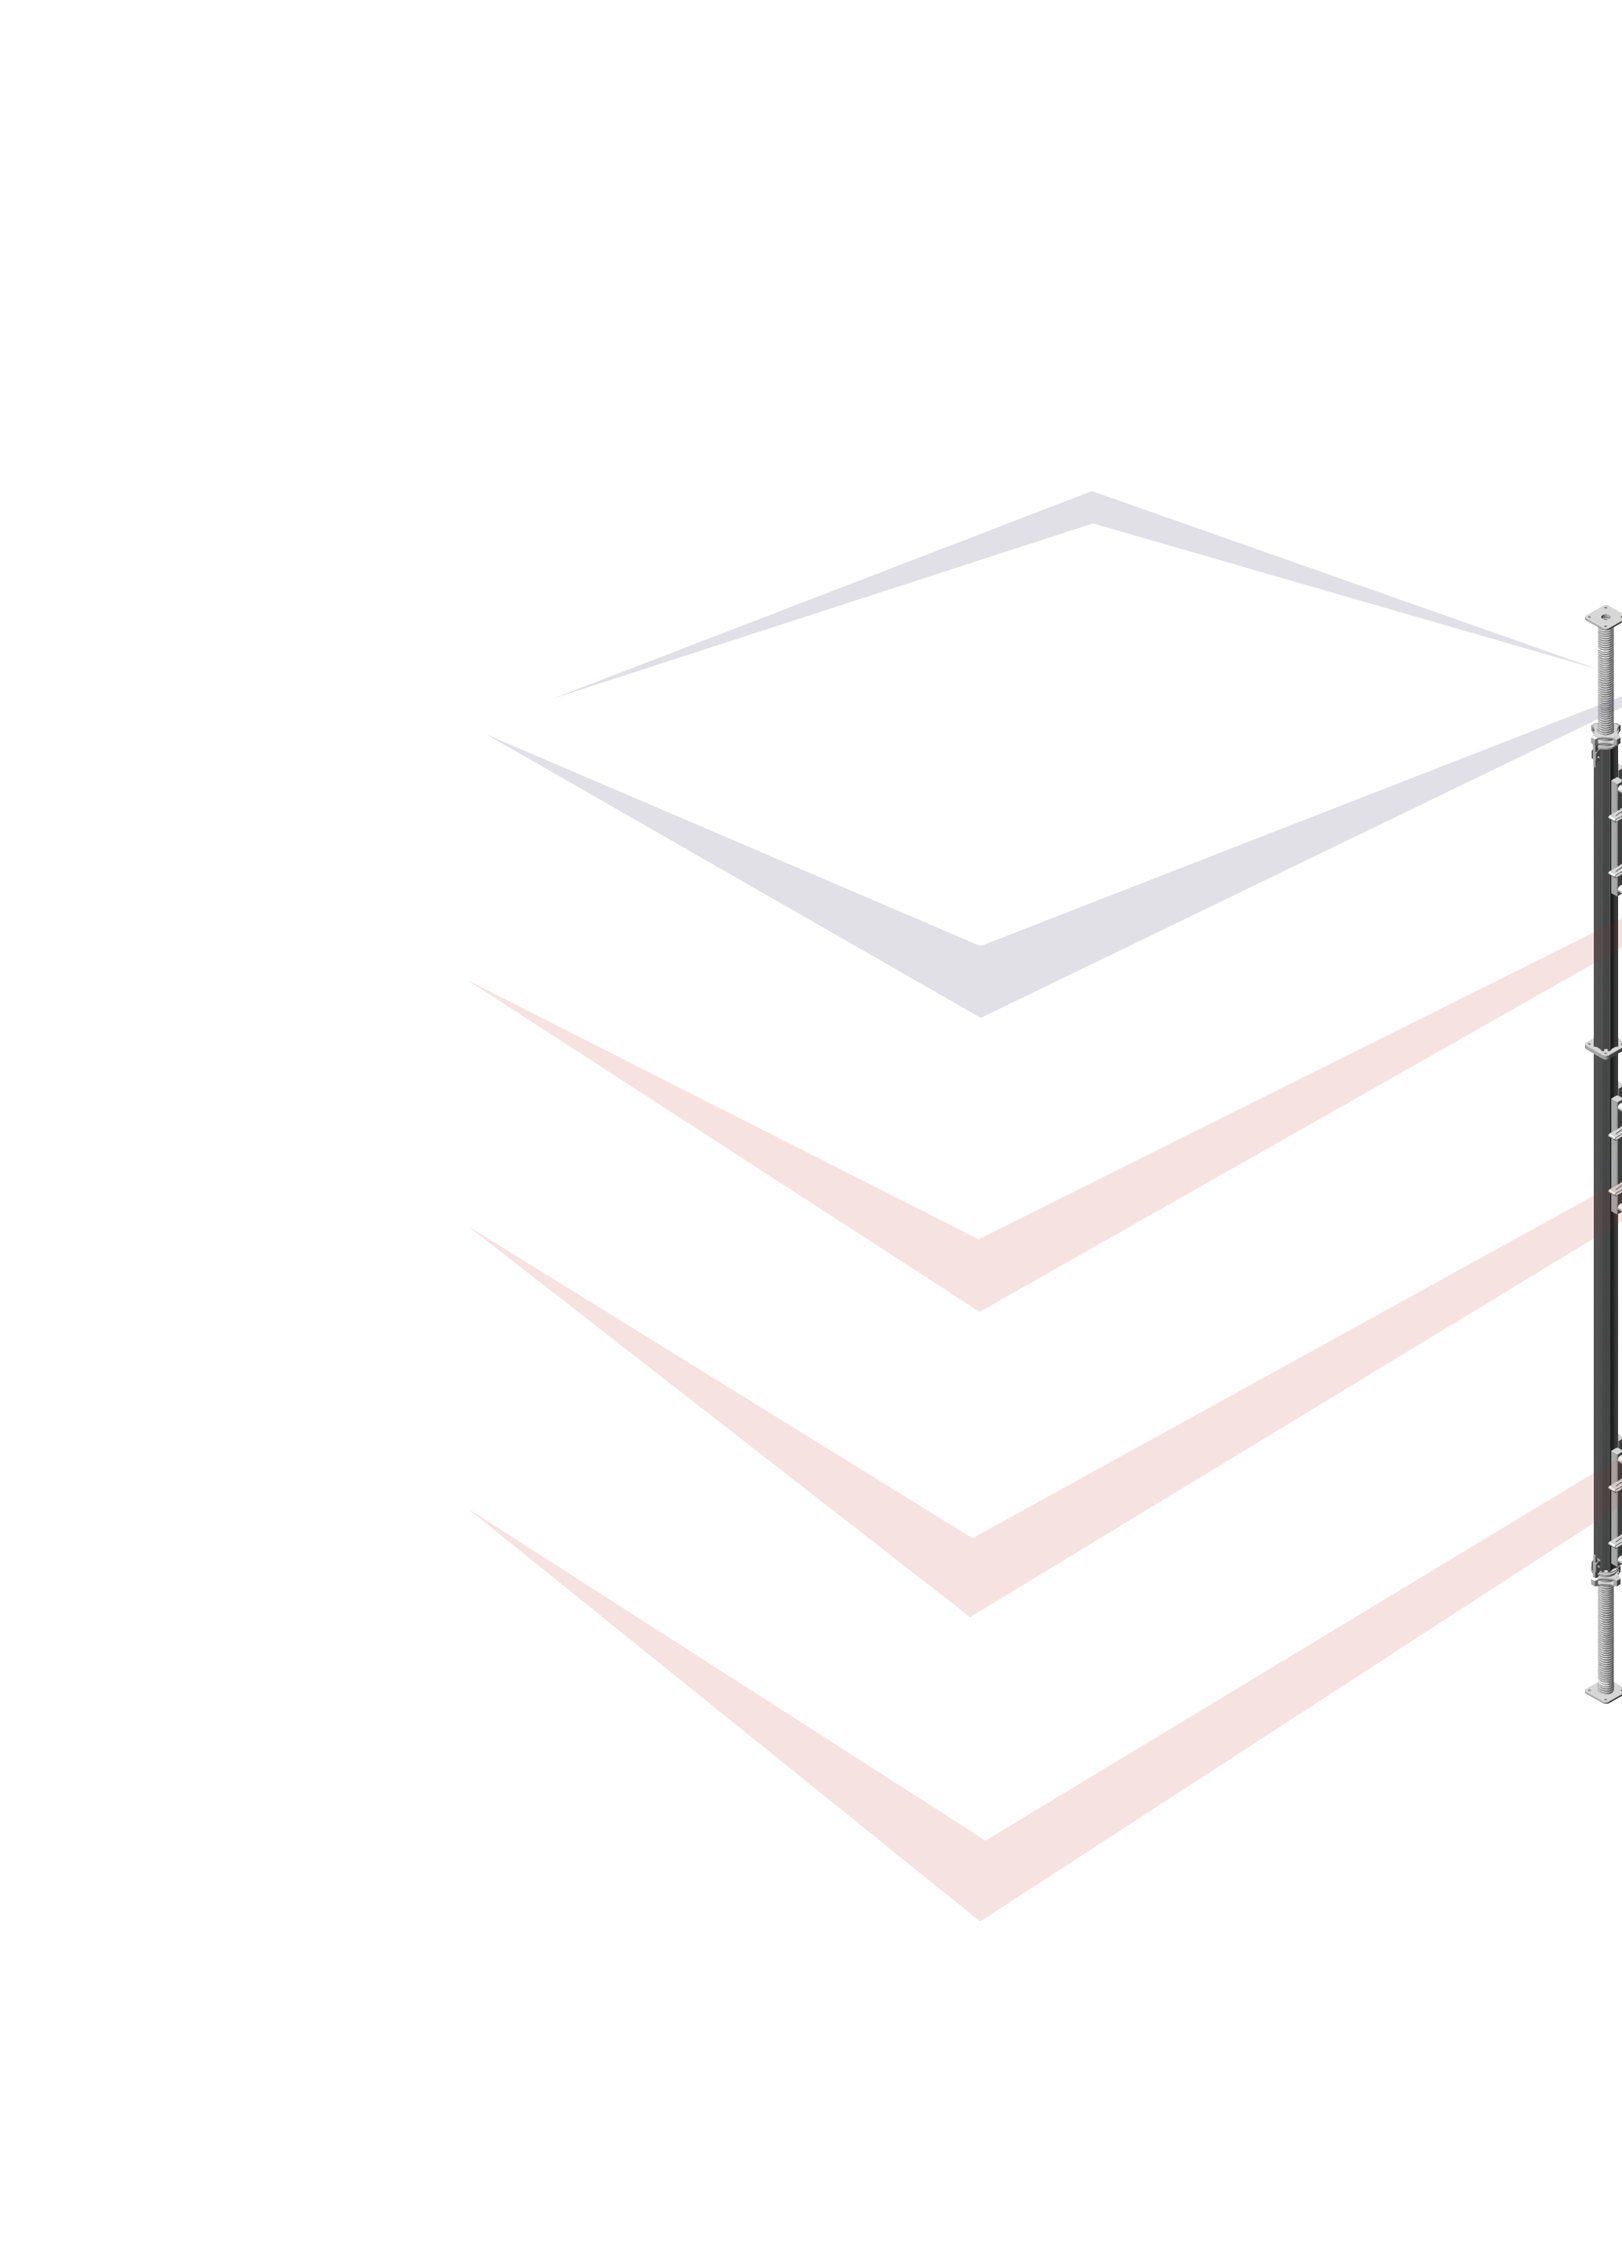

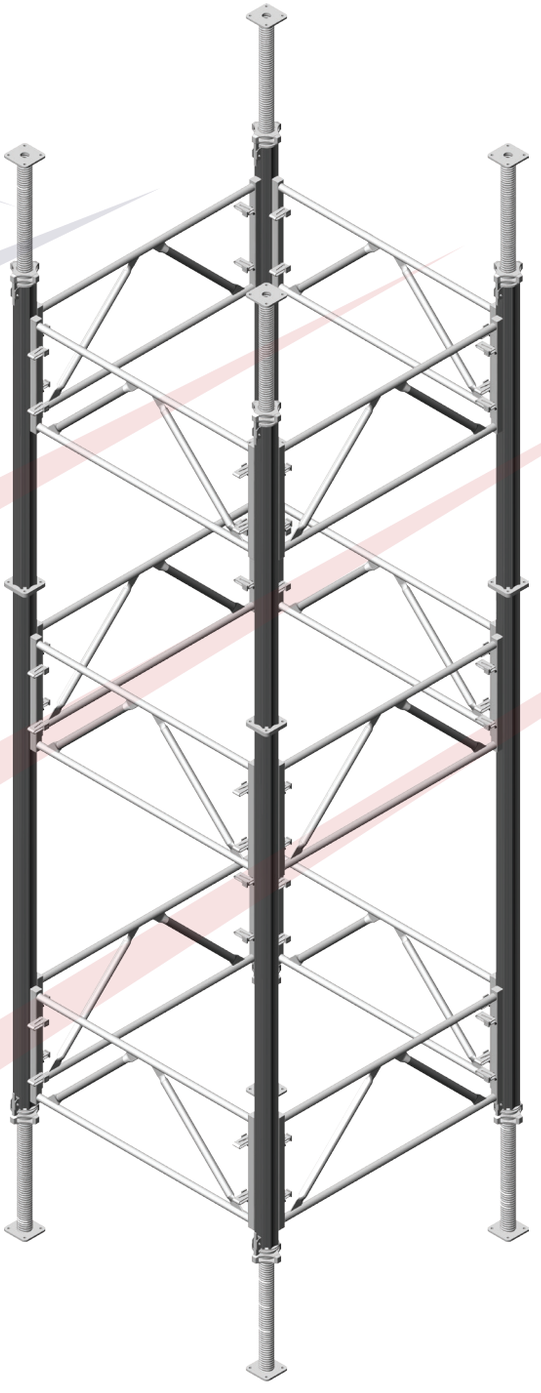

Contents

Introduction	2
Product advantages	3
Heights and extentions	4
Shoring towers	5
Loads for single props	7
Components	8


ACROW
Formwork Technology

Introduction


•Being one of the largest formwork and scaffolding companies in Egypt, We are introducing the ALU PROP which can be used as individual prop, in table system or as shoring towers.

•The ALU PROP post shores are made of aluminium which makes the props light and easy in handling.

We have four different sizes of ALUPROPS, ALP 300,400,500 and 600, the ALP300 can be extended from 1.708 m to 3.0 m but weights only 16.0 Kg.

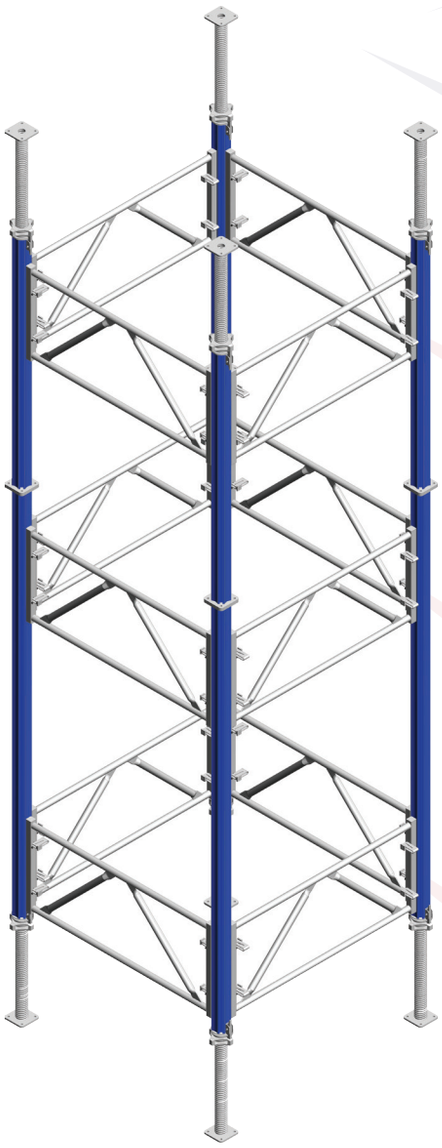

Shoring towes

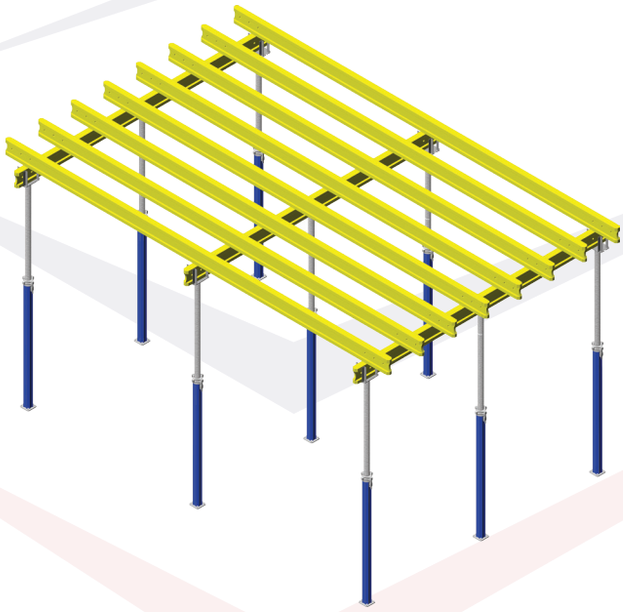

Acrow flex system


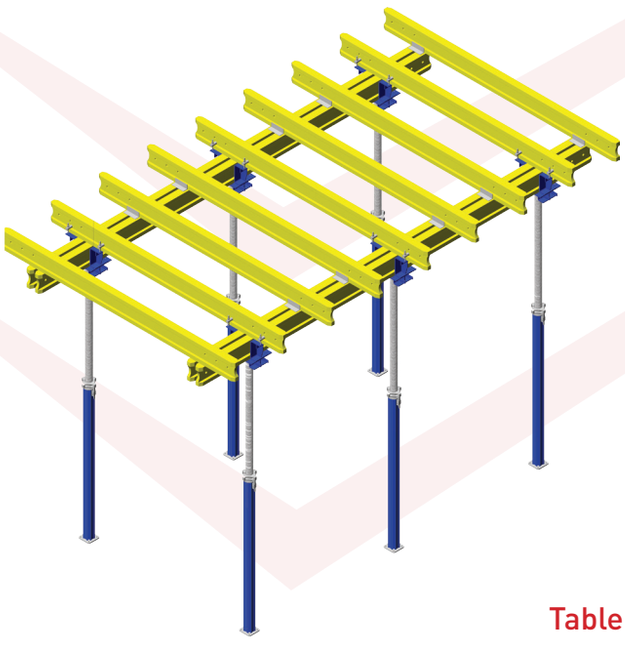


Table form system

Product advantages

•Height adjustment without using pins,the inner tube is threaded not like the conventional steel props fitted with pins.
•The nut and the key make safety stops.
as the inner tube can not slide out accidently during transportation.
•Economic as it can be used as shoring towers by bracing it with the Alu frames or as single props with tripods
•Alu Props could be braced using swivel couplers and tubes.
•High load capacity: 60 kN



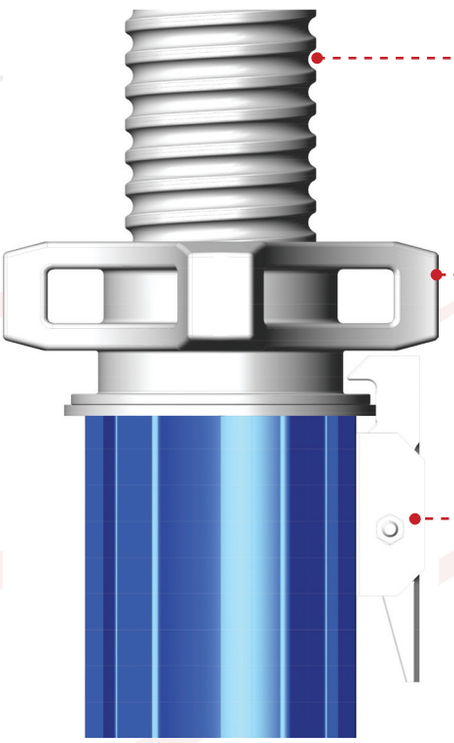

Bracing Shoring towers with Alu frames




ALU PROP with ALU DECK panels, fitted with Drophead

Heights and extentions


4 different prop heights:
ALP300 (1.708 m 3.0 m)
ALP400 (2.878 m 4.0 m)
ALP500 (3.878 m 5.0 m)
ALP600 (4.868 m 6.0 m)

Props could be stacked together to reach
more heights by using connecting bolt with nut.

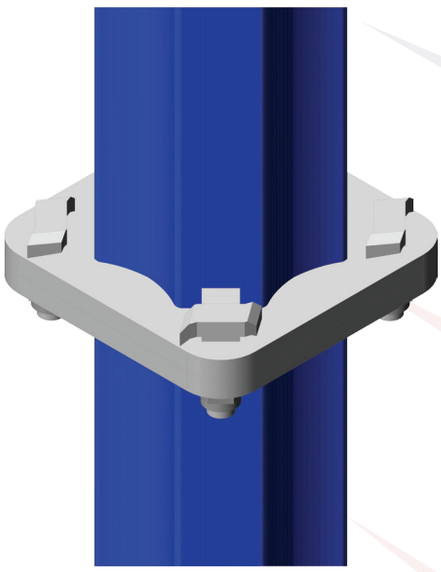



adjusting the height is easy, just release the inner tube, then adjust with the nut.

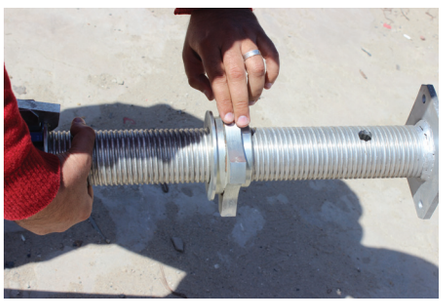


Accurate adjustment threaded inner tube with the nut makes.



Shoring towers


Alu props are braced together with
Alu frames to make towers.

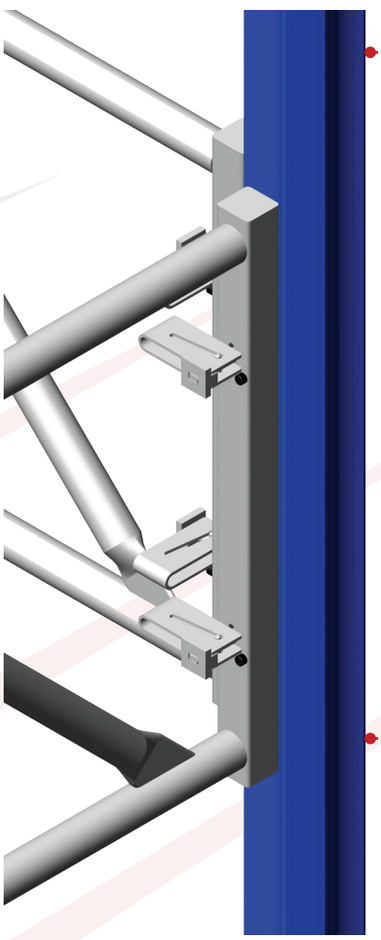





4 differt sizes of Alu frames:
Alu frame 120
Alu frame 150
Alu frame 210
Alu frame 240

Frame connector

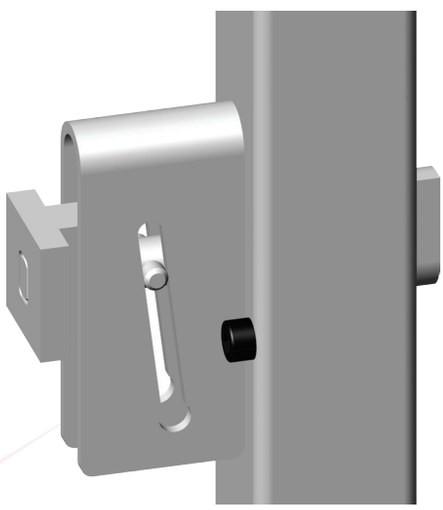


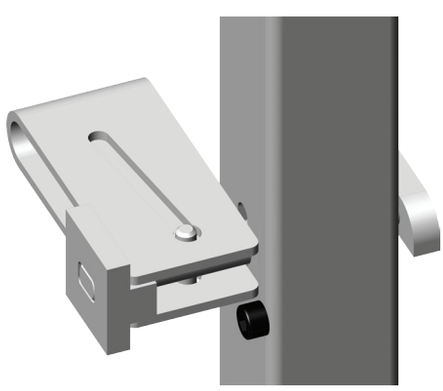


Alu frame 240

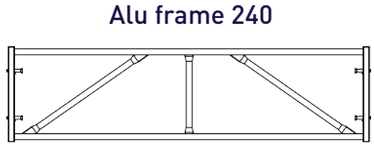


Alu frame 210

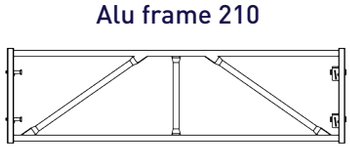

Alu frame 150




Alu frame 120




Shoring towers

Rules for application:
•Spindle not more than 60 cm.
•Every joint connected with a frame.
•One additional frame in the middle when
using ALP500 and ALP600

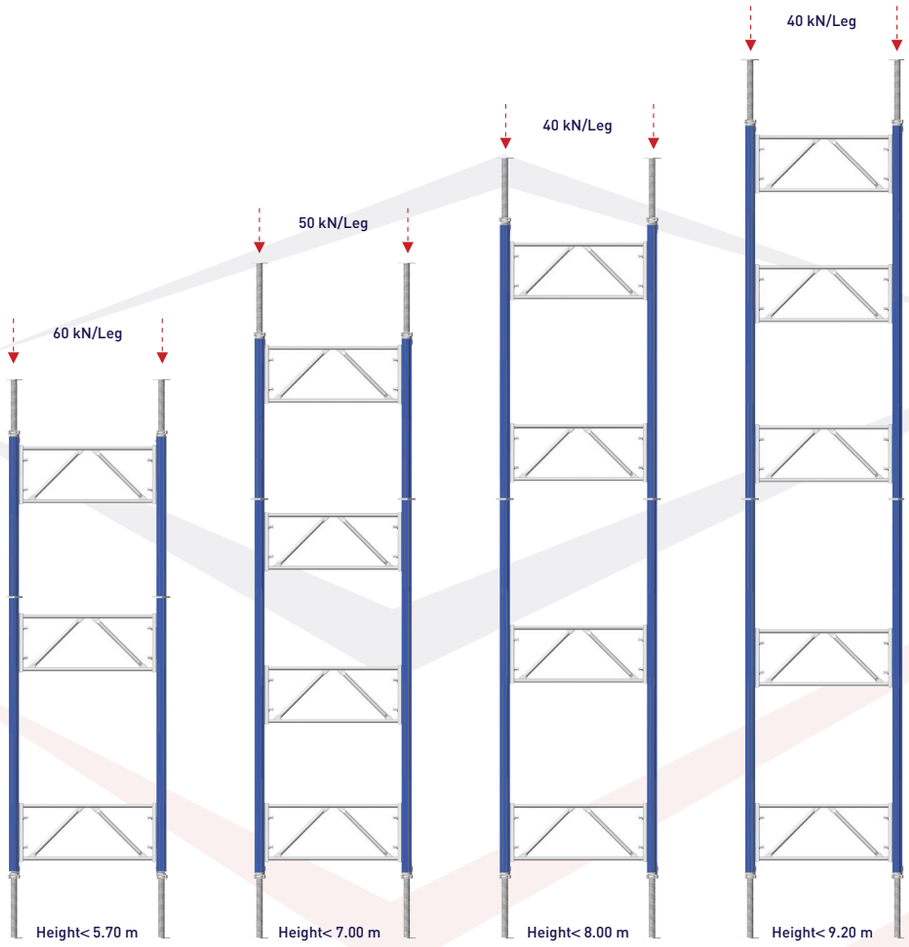

•Allowable loads for towers are mainly regarding to the extension of the spindle

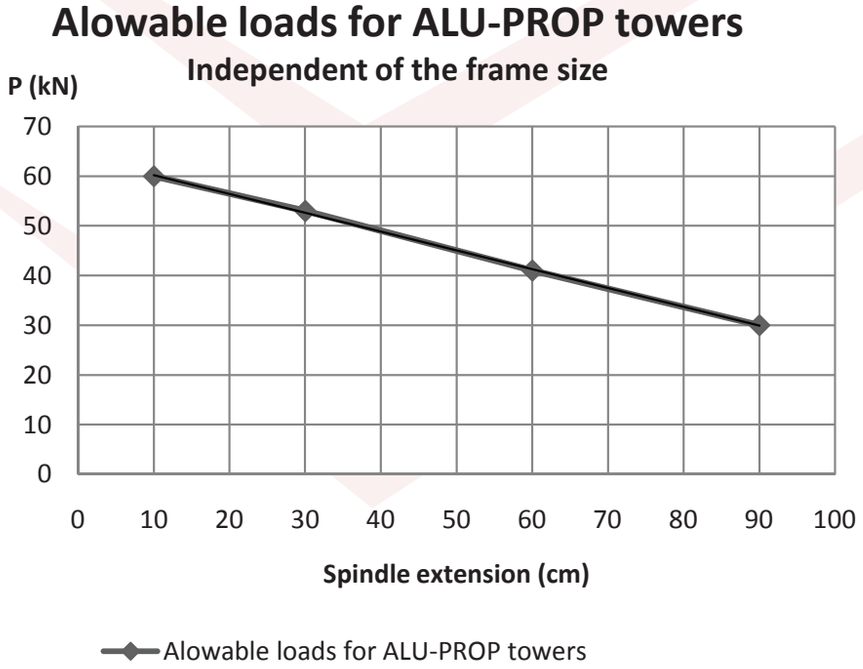


Allowable loads for single props

	Alu-Prop 300	
	Outer tube bottom	Inner tube bottom
L (m)	F (kN)	
1.7	79.4	93.6
2.1	60.0	72.4
2.4	47.4	59.4
2.7	37.6	48.2
3.0	32.3	41.0





	Alu-Prop 500	
	Outer tube bottom	Inner tube bottom
L (m)	F (kN)	
3.85	48.8	44.7
4.1	41.2	42.4
4.4	34.0	38.1
4.7	27.1	31.2
5.0	20.4	26.7

	Alu-Prop 400	
	Outer tube bottom	Inner tube bottom
L (m)	F (kN)	
2.85	80.0	71.6
3.1	60.0	61.8
3.4	42.9	49.3
3.7	31.8	40.6
4.0	25.6	34.8





	Alu-Prop 600	
	Outer tube bottom	Inner tube bottom
L (m)	F (kN)	
4.85	32.9	30.0
5.1	29.1	28.2
5.4	25.2	26.0
5.7	20.5	23.3
4.85	16.6	20.8

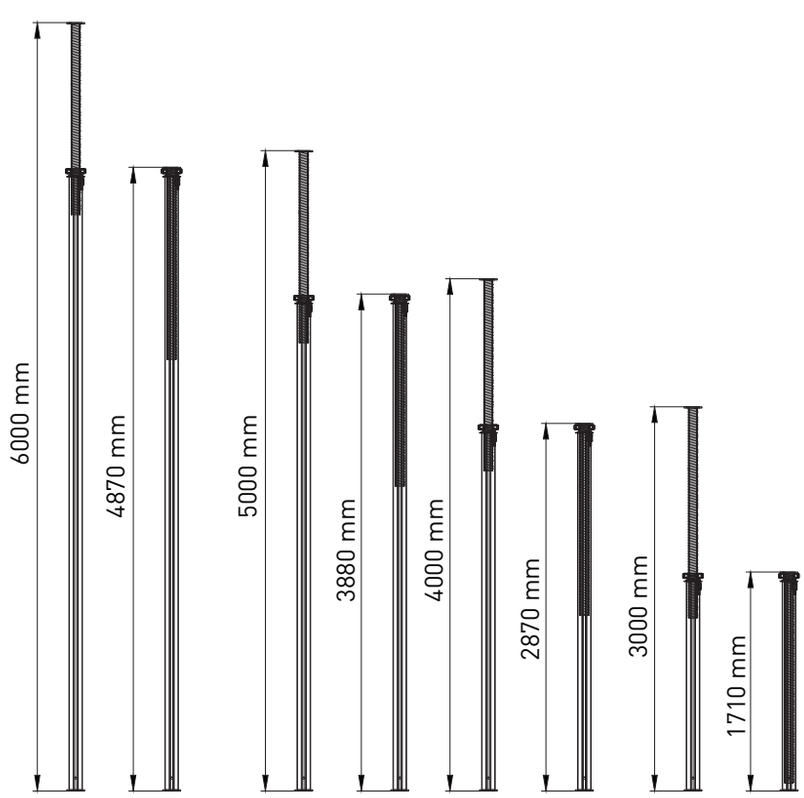


Components

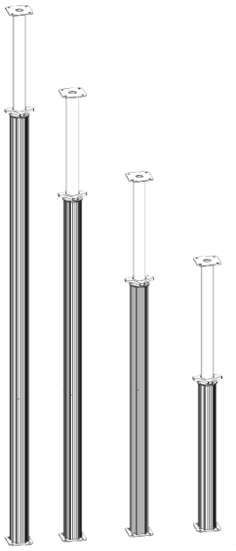Item	Description	Code no.	Weight (kg)
	Alu Prop 300 Alu Prop 400 Alu Prop 500 Alu Prop 600	6221177080891 6221177080907 6221177080914 6221177080921	16.00 19.54 23.12 26.65
	Alu Prop Frame 1200 Alu Prop Frame 1500 Alu Prop Frame 2100 Alu Prop Frame 2400	6221177082789 6221177065867 6221177082796 6221177082802	10.65 12.40 17.30 18.00
	Prop table head (single) Prop table head (double)	6221177013844 6221177013837	16.50 18.50
	Prop leg	6221177013776	12.00

Components

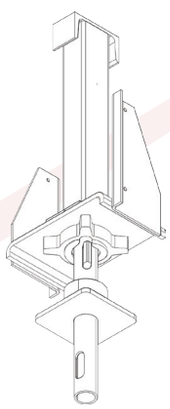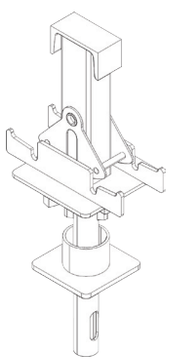Item	Description	Code no.	Weight (kg)
	Claw head (single) Claw head (double)	6221177013752 6221177013769	1.10 1.30
	Prop hanger (single) Prop hanger (double)	6221177013578 6221177013585	1.20 1.60
	Drop head for h20	6221177058203	10.54
	Aludeck drop head	6221177062255	8.92

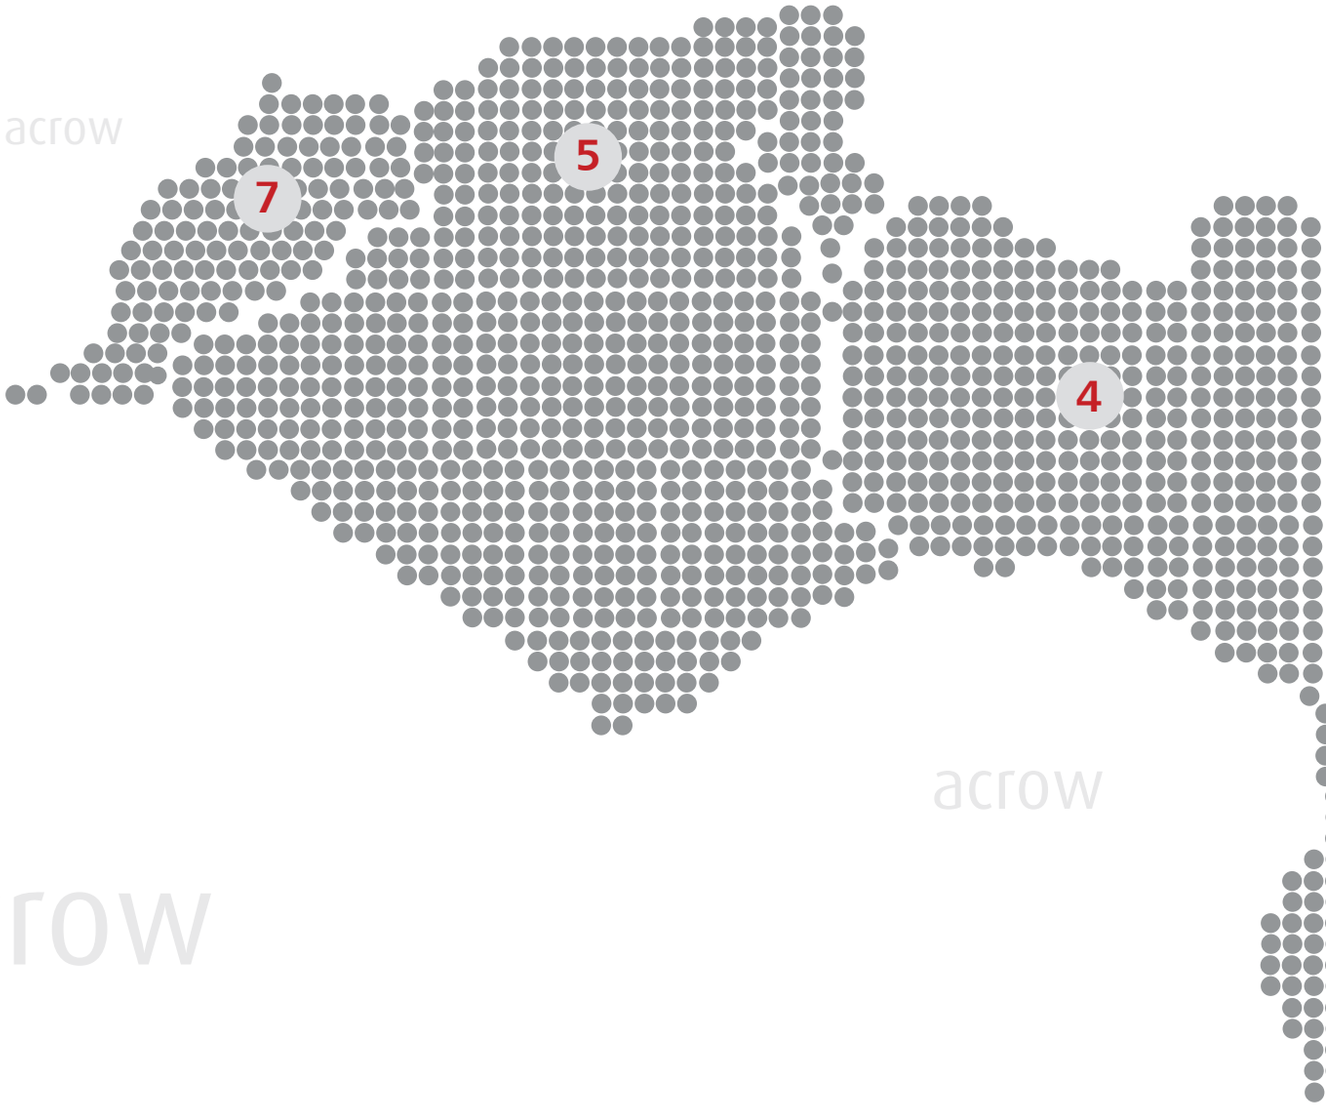

acrow
acrow
acrow
acrow

1 Egypt

Acrow Misr
Head Office, Factory:
Wady Houf, Helwan
Tel: +202 23690 616 / 23690 739
+202 23695 700 / 23699 976
Fax: +202 23695 260
E.mail: info@acrow.co

Alex Branch
27 Dr. mahmoud Daoud st.,
Tel: +203 4200 289
E.mail: acrowalex@acrow.co

Port Said Branch
El freepor Bulding
Tel: +2066 3232542
acrowportsaid@acrow.co

2 KSA

Acrow Al saudia Ltd co.
P.O.Box : 305746-Riyadh-11361
Saudi Arabia Riyadh branch:
Tel : +966 1 2160504
Fax : +966 1 2160503
Email : acrowriyadh@acrow.co

Jeddah branch:
Tel : +966 2 639 16 24
Fax :+966 2 691 85 45
Email : acrowjeddah@acrow.co


Damam branch:
Tel: +966 3 8054151

3 Kuwait

Khalid Ali, Al Kaharafi
& Bros. Co. W.LL
Tel: +965 4813 127 / 4817 289
Fax: +965 4835 501
E.mail: acrowkuwait@acrow.co

4 Libya

Acrow Tripoli
Tel: +218 91 411 6873 / 91 331 9367
Fax: +218 21 351 3838
E.mail: acrowlibya@acrow.co

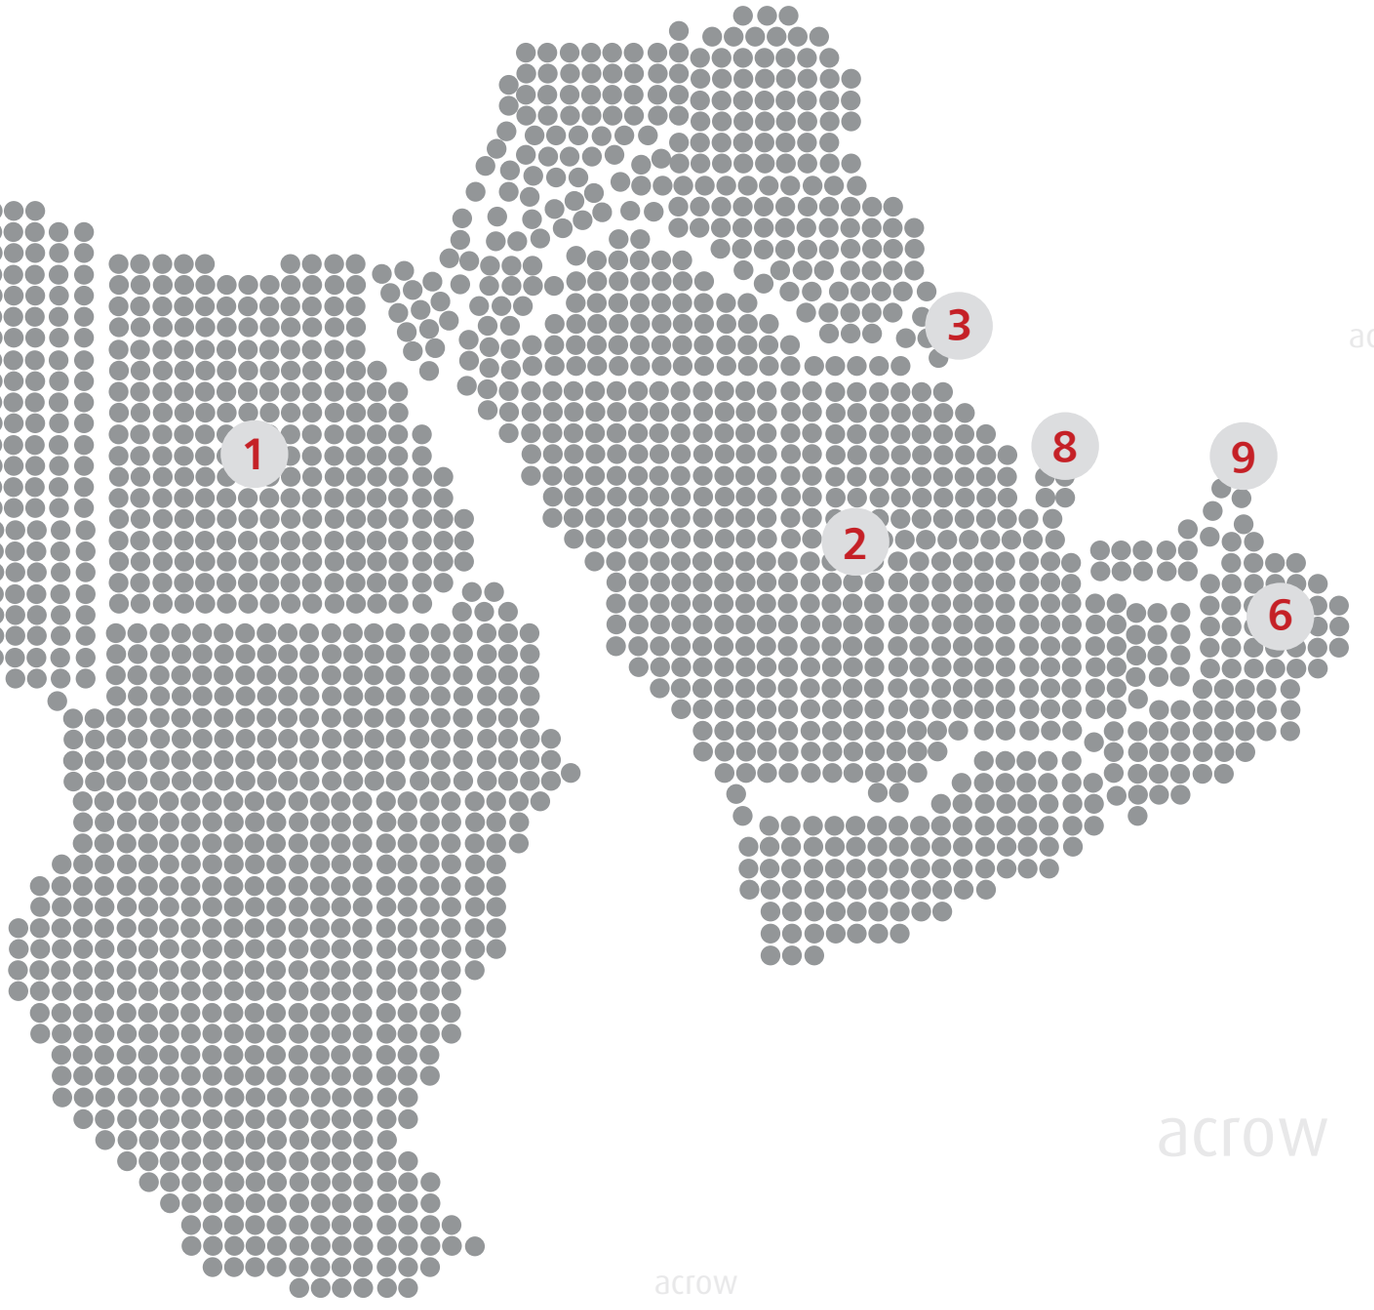

acrow
acrow
acrow
acrow
acrow

5 **Algeria**
ACROW-DZ COMPANY
Tel: +213 (0) 21 75 54 74/63/64
Tel: +213 (0) 21 50 55 58
Fax: +213 (0) 21 50 55 58
Address : Siege Social cité des travailleurs
lot. 09 groupe 02 Dar El beida, Alger
Email : acrow-dz@acrow.co

6 **Oman**
Acrow Muscat
Tel: +968 9828 76 82
E.mail: acrowmuscat@acrow.co

7 **Morocco**
38 Rue Abou El Waqt, Res
Haydar El Jarrah, Rez
Chausser No. 10
Casblanca
e-mail: acrowmorocco@acrow.co

8 **UAE**
Acrow Gulf
Tel: +971 4343 94 98
Fax: +971 4343 95 98
E.mail: acrowgulf@acrow.co

9 **Qatar**
Acrow Qatar
Tel: +974 4582 357
Fax: +974 4582 376
E.mail: acrowqatar@acrow.co

ACROW
Formwork Technology


Acrow H20 & solider


Acrow One shutter solider


Acrow V.M.C


Acrow Tech-Form


Acrow Cuplock


Acrow Bridge table form


Acrow Circular column



Acrow climbing system


Acrow shorbrace Table form


Acrow Big steel panel


Acrow European prop


Acrow Vari form


Acrow Prop table form


Acrow frame


Acrow early striking system


Acrow Ring lock

www.acrow.co

02/2013, Code No.:2007050060985