

Kabelaufbautabelle / Cable design table

Bezeichnung: Description:	MSSA 053H-020R-024F-1HN0-OXX L	Dok.-Nr.: Doc. No.:	8078-D035851/B05/000
Materialnummer: Part number:	80009965-02-0	Version: Revision:	02
Ausgabe am: Released at:	15.02.2023	Seite Page	1 / 5

1 CABLING

Required cable length see assembly drawing

1.1 CABLE W1

Cable with open wires

Wire	Signal	Remark	Color	Twist with	Marking
A1	1_U	Motorphase U	red	A2,A3,A4	W1
A2	1_V	Motorphase V	white	A1,A3,A4	
A3	1_W	Motorphase W	black	A1,A2,A4	
A4	1_PE	Housing of Actuator	yellow-green	A1,A2,A3	

Table 1: Wiring actuator power lines, winding no. 1

1.2 CABLE W2

Cable with open wires

Wire	Signal	Remark	Color	Twist with	Marking
A1	2_U	Motorphase U	red	A2,A3,A4	W2
A2	2_V	Motorphase V	white	A1,A3,A4	
A3	2_W	Motorphase W	black	A1,A2,A4	
A4	2_PE	Housing of Actuator	yellow-green	A1,A2,A3	

Table 2: Wiring actuator power lines, winding no. 2

Erstellt Prepared		Geprüft und freigegeben Approved and released	
Name / Abtlg.: Name / Dept.:	Steffen Heller / EN WMC	Name / Abtlg.: Name / Dept.:	Carsten Streubel / EN WMC
Datum: Date:	15.02.2023	Datum: Date:	15.02.2023
Unterschrift: Signature:		Unterschrift: Signature:	

Kabelaufbautabelle / Cable design table

Bezeichnung: Description:	MSSA 053H-020R-024F-1HN0-OXX L	Dok.-Nr.: Doc. No.:	8078-D035851/B05/000
Materialnummer: Part number:	80009965-02-0	Version: Revision:	02
Ausgabe am: Released at:	15.02.2023	Seite Page	2 / 5

1.3 CABLE R1

Cable with open wires

Wire	Signal	Remark	Color	Twist with	Marking
1	1_SIN_H	Resolver#1, Sinus+	yellow	2	R1
2	1_SIN_L	Resolver#1, Sinus-	blue	1	
3	1_COS_H	Resolver#1, Cosinus+	red	4	
4	1_COS_L	Resolver#1, Cosinus-	black	3	
5	1_EXC_H	Resolver#1, Excitation	red/white	6	
6	1_EXC_L	Reference to 11	yellow/white	5	
Shell	Screen	Screen			

Table 3: Wiring motor commutation 1

1.4 CABLE R2

Cable with open wires

Wire	Signal	Remark	Color	Twist with	Marking
1	2_SIN_H	Resolver#2, Sinus+	blue	2	R2
2	2_SIN_L	Resolver#2, Sinus-	yellow	1	
3	2_COS_H	Resolver#2, Cosinus+	red	4	
4	2_COS_L	Resolver#2, Cosinus-	black	3	
5	2_EXC_H	Resolver#2, Excitation	red/white	6	
6	2_EXC_L	Reference to 13	yellow/white	5	
Shell	Screen	Screen			

Table 4: Wiring motor commutation 2

1.5 CABLE T1

Cable with open wires

Wire	Signal	Remark	Color	Twist with	Marking
1	1A_NTC_H	Motorthermistor 1 +	blue	3	8
2	1B_NTC_H	Motorthermistor 2 +	blue	4	10
3	1A_NTC_L	Motorthermistor 1 -	blue	1	8
4	1B_NTC_L	Motorthermistor 2 -	blue	2	10
Shell	Screen	Screen			

Table 5: Wiring motor temperature 1

Kabelaufbautabelle / Cable design table

Bezeichnung: Description:	MSSA 053H-020R-024F-1HN0-OXX L	Dok.-Nr.: Doc. No.:	8078-D035851/B05/000
Materialnummer: Part number:	80009965-02-0	Version: Revision:	02
Ausgabe am: Released at:	15.02.2023	Seite Page	3 / 5

1.6 CABLE T2

Cable with open wires

Wire	Signal	Remark	Color	Twist with	Marking
1	2A_NTC_H	Motorthermistor 1 +	blue	3	12
2	2B_NTC_H	Motorthermistor 2 +	blue	4	14
3	2A_NTC_L	Motorthermistor 1 -	blue	1	12
4	2B_NTC_L	Motorthermistor 2 -	blue	2	14
Shell	Screen	Screen			

Table 6: Wiring motor temperature 2

2 SHIELD AND TUBING

Item	Parts List Pos. AC: 80009965	Length [mm]	Covering item
1	290	1000	Winding 1
2	290	1000	Winding 2
3	290	1000	Resolver 1
4	290	1000	Resolver 2
5	290	1000	Tempsensors 1
6	290	1000	Tempsensors 2

Table 7: Shielding


Item	Parts List Pos. AC: 80009965	Length [mm]	Covering item
7	280	1000	Winding 1
8	280	1000	Winding 2
9	1020	1000	Resolver 1
10	1020	1000	Resolver 2
11	1020	1000	Temperatursensor 1
12	1020	1000	Temperatursensor 2

Table 8: Shrinkable Tubing

Kabelaufbautabelle / Cable design table

Bezeichnung: Description:	MSSA 053H-020R-024F-1HN0-OXX L	Dok.-Nr.: Doc. No.:	8078-D035851/B05/000
Materialnummer: Part number:	80009965-02-0	Version: Revision:	02
Ausgabe am: Released at:	15.02.2023	Seite Page	4 / 5

3 SCHEMATICS

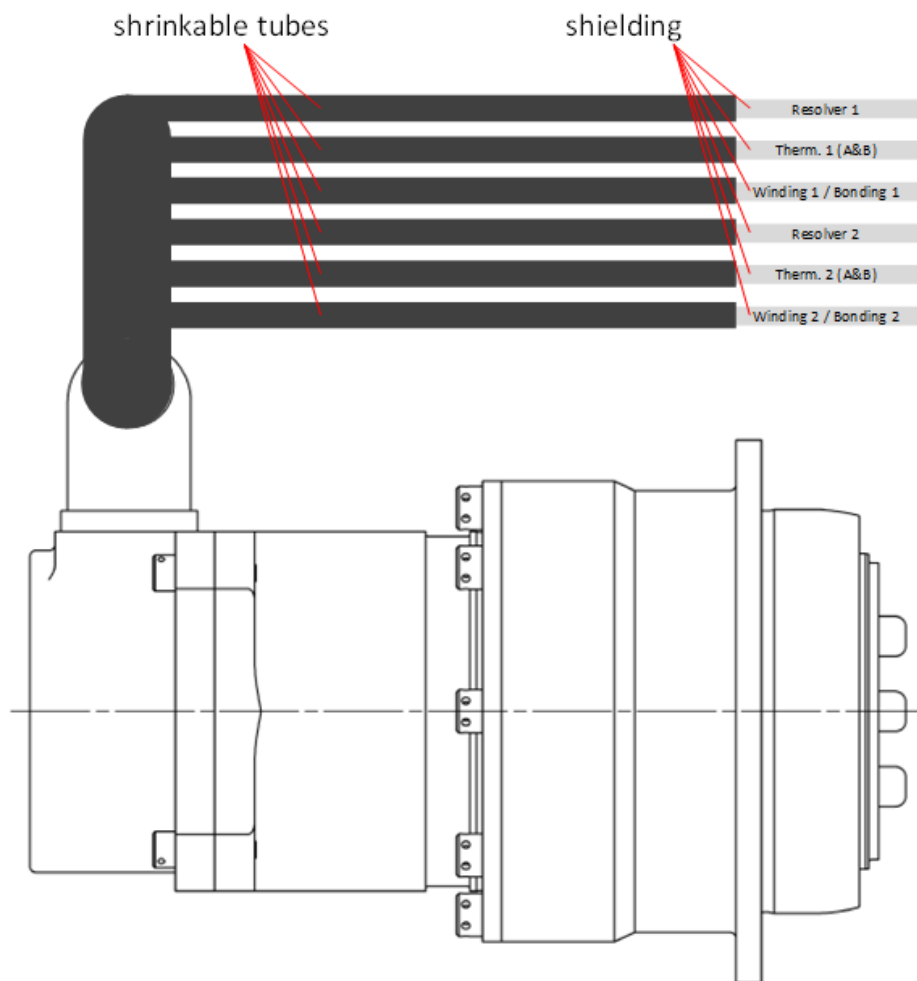

Kabelaufbautabelle / Cable design table

Bezeichnung: Description:	MSSA 053H-020R-024F-1HN0-OXX L	Dok.-Nr.: Doc. No.:	8078-D035851/B05/000
Materialnummer: Part number:	80009965-02-0	Version: Revision:	02
Ausgabe am: Released at:	15.02.2023	Seite Page	5 / 5

