



Purchase #: 00009342

Date: 18/12/2024

Suzhou Sudelan Railway Parts Co. Ltd
No.9 Donghuan Rd.,
Fuqiao Town
Taicang City, Jiangsu Province
P R CHINA

Delivery Address:
FOB China Port

Requested Delivery Date: 17/01/2025

Page: 1

Part No.	Description	Qty	Unit Price	Total	Job No.
2203-S	Fe6 Gal Double Helical Spring Washer to Suit DWG# ACC-FE6-01_A	100,000	US\$0.38	US\$38,000.00	Stock

Drawing Number: ACC-FE6-01_A
QCP: STOCK-QP-015 Rev A

Notes:

1. Packing Instructions:
Fe6 Washers to be packed in bags of 200 in
Wooden Crates (Heavy Duty Type) totalling
4,000 washers (25 crates in total)
2. Material Conformance Certificate is required
3. Delkor Rail will arrange for an inspection of
shipment before despatching the washers
4. Bags should be labelled as follows:
Delkor Rail
Fe6 Washer
Stock Code: 2203-S
No. off: 200
Weight: 20kg
Batch: 99
5. Ex-work Date: Sudelan 17/01/2025
6. Incoterms 2010: FOB China Port
7. As per quotation
8. Please Acknowledge Receipt of This Order
9. To provide Asbestos Due Diligence
Declaration for Australian Customs clearance.

COMMENT

Sub Total	US\$38,000.00	
Freight	US\$0.00	FRE
GST	US\$0.00	
Order Total	US\$38,000.00	




A.B.N. 16 003 769 140

T&Cs www.delkorrail.com


Delkor Rail Pty Ltd

74 Harley Crescent, PO Box CP217 Condell Park NSW 2200
PH: +61 2 9709 2918 Fax: +61 2 9709 5934

REV	DESCRIPTION	DATE	BY	CHK
A	ISSUED FOR DISTRIBUTION	12-JUN-20	AF	RB

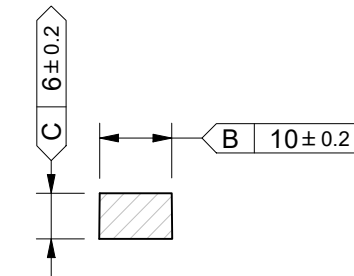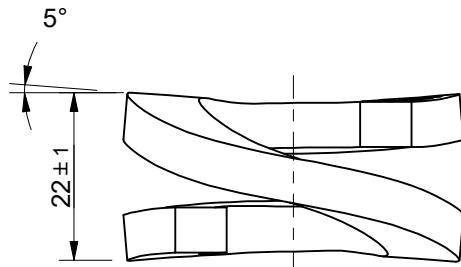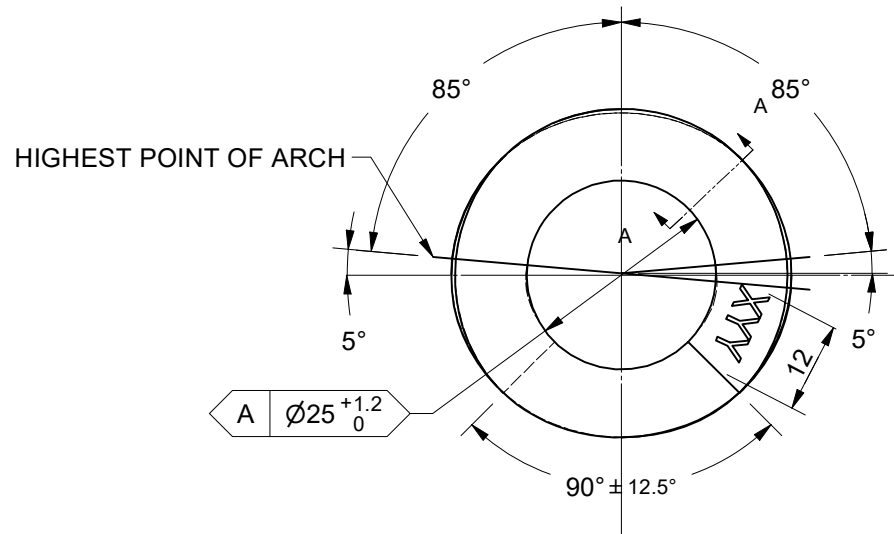

SECTION A-A

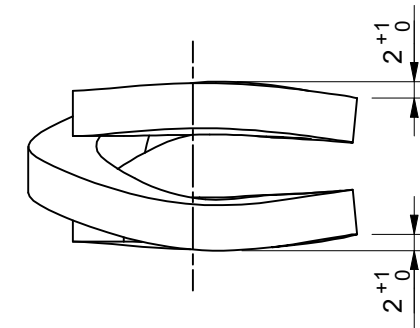


NOTES

- DIMENSIONS ARE FOR FINISHED UNLOADED PRODUCT
- DISTANCE BETWEEN TWO SPRING WASHER ARCHES AT A LOAD OF 35kN, MIN 1.0mm AT 4mm DEPTH AS MEASURED FROM OUTSIDE. RELIEVING SPRING WAY 40-10kN = 0.75mm.
- STAND HEIGHT = 17.8mm AT 40kN AFTER 10 SECONDS
- MATERIAL - SPEC-ACC-FE6

MARKING AND IDENTIFICATION

4mm LETTERING, 0.5mm RECESSED

- X - MANUFACTURER MARK
- YY - YEAR OF MANUFACTURE

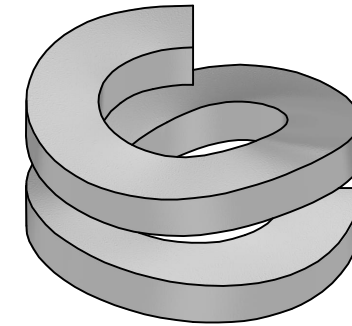

DRAWN	
AF	23-APR-2020
CHECKED	
RB	12-JUN-2020



DELKOR RAIL - SPRING WASHER
Fe6 - HIGH TENSION DOUBLE HELICAL
MANUFACTURING DRAWING

DRAWING No. ACC-FE6-01		
SCALE (A4) 1:1		REVISION A

Quality Control Plan

STOCK-QP-015_A

Fe6-01 Spring Washer

Revision	Date	Author	Checked by	Amendments
A	18/12/2024	 2024.12.18 14:41:39 +11'00'	 Digitally signed by Andrew Franklin Date: 2024.12.18 14:51:16 +11'00'	Initial Issue

Project	STOCK	Part Number	Fe6-01
Specification	SPEC-ACC-FE6	Drawing Number	ACC-Fe6-01


Quality Control Plan

Sample [] Trial-production [] Mass production [✓]	Main contact/Tel:	Prepared Date: 18/12/2024	Revise Date:
Core Team:		Approved date about the project (if necessary):	
		Approved date about the quality (if necessary):	
Supplier: Sudelan	Supplier No.:	Approved date (if necessary):	Approved date about others (if necessary):

No.	Description	Characteristic				Method					FAT
		Item	Part Name	Content		Criteria/ Nominal Value / Tolerance	Relevant Standard / Document / Drawing	Measuring Equipment	Min Sample Frequency	Control Method	
1	Fe6 Spring Washer	1	Raw Material 38Si7	Chemical Composition Test	C	0.35-0.42%	Delkor Specification SPEC-ACC-FE6	Various	1 per batch	Test Report	Document Review Only
					Si	1.50-1.80%					
					Mn	0.50-0.80%					
					P	≤0.025%					
					S	≤0.025%					
				Tensile Strength		1180-1370Mpa		Universal Testing Machine			
				Yield Strength		≥1030Mpa					
				Elongation at break		≥6.0%					
				Reduction of area after break		≥20%					
				Impact energy at room temperature KU ₂		≥9J					

Quality Control Plan

Sample [] Trial-production [] Mass production [✓]	Main contact/Tel:	Prepared Date: 18/12/2024	Revise Date:
Core Team:		Approved date about the project (if necessary):	
		Approved date about the quality (if necessary):	
Supplier: Sudelan	Supplier No.:	Approved date (if necessary):	Approved date about others (if necessary):

		2	Finished Product	Springiness on Release Test	• Meet value on manufacturing drawing for relieving spring way • Overall height after test must be within limits of manufacturing drawing	PROC-SWVT	Various	Single Sampling Plan, Special Inspection Level S-I, AQL 2.5 (ISO 2859-1)	Test Report	Document Review Only
				Texture Test	Smooth broken section without trace of internal cracking	Delkor Specification SPEC-ACC-FE6	Visual			
				Torsion Test	No cracks after twisting					
				Vickers Hardness	430 – 515 HV30		Hardness Tester			
				Dimensional accuracy	Inspection dimensions shown in reference document as per example below 	ACC-FE6-01	Various	Single Sampling Plan, General Inspection Level I, AQL 2.5 (ISO 2859-1)		
				Appearance	Identification and Markings as per reference document	ACC-FE6-01	Visual Inspection			
				Coating Thickness	Minimum Average ≥ 53µm	ISO 1461	Thickness Gauge	Single Sampling Plan, Special Inspection Level S-I, AQL 2.5 (ISO 2859-1)		