


PANDROL

Pandrol Anchor Components

PRODUCT SPECIFICATION

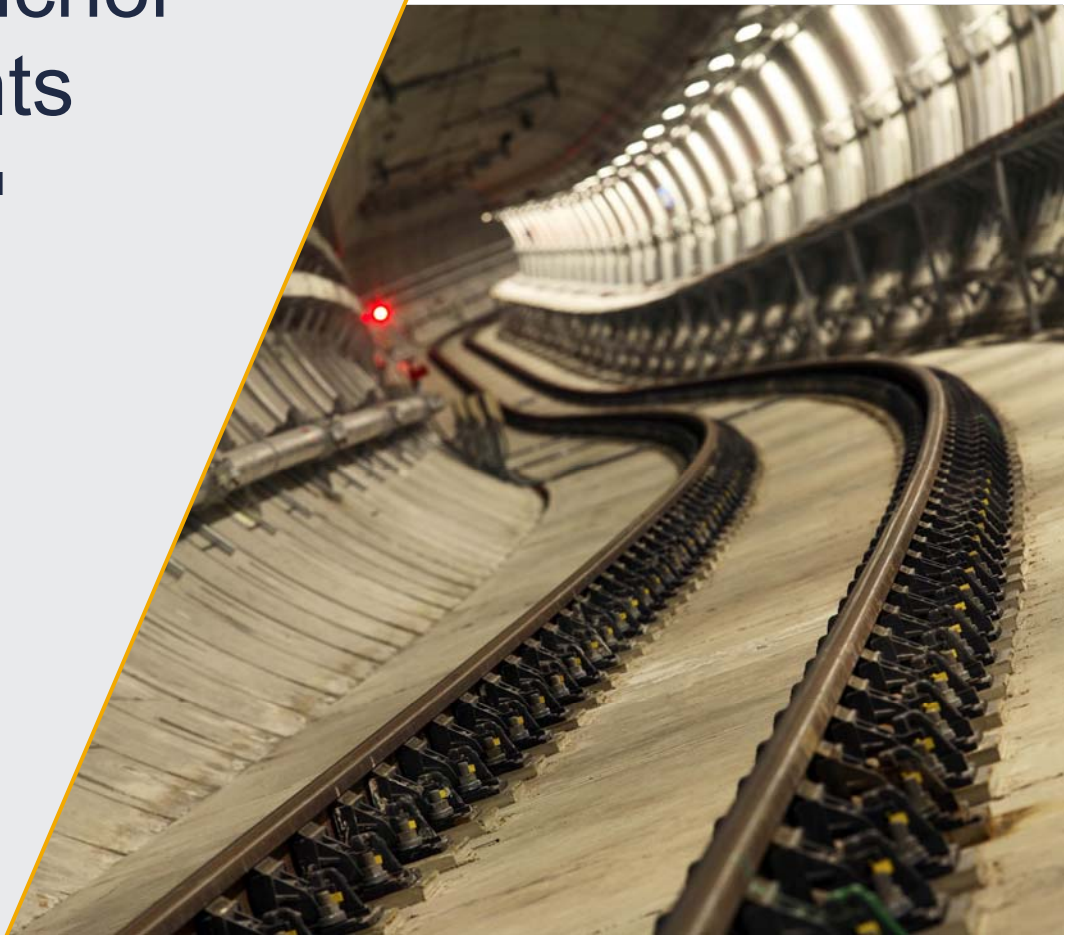

LC-J

30 March 2021

Partners in excellence



Revision History

Version	Date	Authorised by	Comments
4	30 March 2021	Head of Engineering and Support	Document format updated, no technical changes. ECR 15314

General note

The manufacturer shall check that specification reference and issue code on this document corresponds exactly to the code on purchase order.

The use of equivalent International Standards to those specified below is subject to written agreement from Pandrol Rail Fastening Systems, Product Line.

For packaging, labelling and shipping requirements refer to the purchase order.

1. Scope

This specification covers the supply requirements for Anchor Components listed below.

2. Components

2.1 Screws

Description	Specification
Screw (Pandrol Part No. 17843)	Material: Steel, property class 5.6 to EN ISO 898-1 Coating: Hot dip galvanised to EN ISO 10684, 50µm batch average thickness (or Pandrol approved alternative)

2.2 Plain Washer

Description	Specification
M24 Plain Washer (Pandrol part No. 11244)	BS 4320, form C flat washer, or Pandrol approved alternative Coating: Hot dip galvanised to EN ISO 10684, 50µm batch average thickness (or Pandrol approved alternative)

2.3 Disc spring washer

Description	Specification
M24 Disc Spring (Pandrol part No. 11242)	EN 16983 – A 50 diameter (to suit M24 fastener), or Pandrol approved alternative Coating: Mechanical Zinc plate and passivate to EN ISO 12683, or Pandrol approved alternative

NOTE: EN 16983 replaced DIN 2093

2.4 Threaded insert

Description	Specification
Threaded insert (Pandrol Part No. 17844)	Assembly of two piece threaded insert and removable cap Material: Glass Reinforced Nylon (GRN)

PANDROL

Find out more at

pandrol.com

Pandrol Rail Fastening Systems
Gateford Road,
Worksop,
Nottinghamshire
S81 7AX
UK

+44 (0)1909 476101
www.pandrol.com

© Pandrol

Partners in excellence