

EMF & FARADAY'S LAW

Transformer EMF *stationary loop, B changes*

V_{emf} = - \int_S \frac{\partial \mathbf{B}}{\partial t} \cdot d\mathbf{s}

Motional EMF *loop moves, B static*

V_{emf} = \oint (\mathbf{v} \times \mathbf{B}) \cdot d\mathbf{l}

General (flux form) *always works*

V_{emf} = - \frac{d\Phi}{dt} \quad \Phi = \int_S \mathbf{B} \cdot d\mathbf{s}

N-turn coil *transformer, N turns*

V_{emf} = -N \frac{d\Phi}{dt} = - \frac{d\lambda}{dt} \quad \lambda = N\Phi

Uniform B shortcut *B same everywhere on loop*

V_{emf} = - \frac{\partial B}{\partial t} \cdot A

Long wire + rect loop *wire near loop, r: a \to b, height c*

V_{emf} = - \int_0^c \int_a^b \frac{\partial \mathbf{B}}{\partial t} \cdot d\mathbf{s} = - \int_0^c \int_a^b \frac{\partial}{\partial t} \left(\frac{\mu_0 I}{2\pi r} \right) dr dz

MAXWELL'S EQUATIONS

Name	Differential form
Faraday	$\nabla \times \mathbf{E} = -\partial \mathbf{B} / \partial t$
Ampère	$\nabla \times \mathbf{H} = \mathbf{J} + \partial \mathbf{D} / \partial t$
Gauss (E)	$\nabla \cdot \mathbf{D} = \rho_v$
Gauss (B)	$\nabla \cdot \mathbf{B} = 0$
$\mathbf{D} = \epsilon \mathbf{E}; \mathbf{B} = \mu \mathbf{H};$ source-free: $\rho_v = 0, \mathbf{J} = \mathbf{0}$	

SURFACE ELEMENT ds

d\mathbf{s} = \hat{n} da \quad (RHR \text{ gives } \hat{n}: \text{curl fingers in loop direction, thumb} = \hat{n})

Loop plane	d\mathbf{s}
x-y	\hat{z} dx dy or \hat{z} r dr d\phi
y-z	\hat{x} dy dz
x-z	\hat{y} dx dz
coplanar / toroid	\hat{\phi} dr dz
Uniform B: \iint da = A (just the loop area)	

DOT PRODUCTS \hat{a} \cdot \hat{b}

Same direction = 1; perpendicular = 0

	\hat{x}	\hat{y}	\hat{z}	\hat{r}	\hat{\phi}
\hat{x}	1	0	0	0	0
\hat{y}	0	1	0	0	0
\hat{z}	0	0	1	0	0
\hat{\phi}	0	0	0	0	1

CROSS PRODUCT \mathbf{A} \times \mathbf{B} (determinant)

$$\mathbf{A} \times \mathbf{B} = \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ A_x & A_y & A_z \\ B_x & B_y & B_z \end{vmatrix}$$
$$= (A_y B_z - A_z B_y) \hat{x} - (A_x B_z - A_z B_x) \hat{y} + (A_x B_y - A_y B_x) \hat{z}$$

Also used for curl:

$$\nabla \times \mathbf{E} = \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ \partial_x & \partial_y & \partial_z \\ E_x & E_y & E_z \end{vmatrix}$$

Plane wave ($\partial_x = \partial_y = 0$): only ∂_z row survives.

B FIELDS

Infinite wire *single wire carrying I, N = 1*

\mathbf{B} = \hat{\phi} \frac{\mu_0 I}{2\pi r}

Inside toroid *coil of N turns carrying I*

\mathbf{B} = \hat{\phi} \frac{\mu N I}{2\pi r} \quad \mu = \mu_r \mu_0

N in \mathbf{B} only if the source (current-carrying thing) is a multi-turn coil. Single wire \Rightarrow N = 1, drop it. N in V_{emf} = -N d\Phi/dt is the receiver coil turns.

\partial B / \partial t TABLE

B(t)	\partial B / \partial t
B_0 \sin(\omega t)	B_0 \omega \cos(\omega t)
B_0 \cos(\omega t)	-B_0 \omega \sin(\omega t)
B_0 e^{-\alpha t}	-\alpha B_0 e^{-\alpha t}
B_0 (const)	0

SIGN \rightarrow CURRENT DIRECTION

V_{emf}	Inside source	I dir.
< 0	- \rightarrow + terminal	-\hat{\phi} (CW)
> 0	+ \rightarrow - terminal	+\hat{\phi} (CCW)
= 0	—	none
Lenz: induced I always opposes the change in \Phi.		

ln INTEGRAL

B \propto 1/r, loop spans r = a to r = b

$$\int_a^b \frac{dr}{r} = \ln \frac{b}{a} = \ln b - \ln a$$

\ln \frac{b}{a} = \ln b - \ln a

\ln 2 = 0.693 \quad \ln 3 = 1.099 \quad \ln 1.2 = 0.182

ROTATING LOOP — GENERATOR

$\Phi = AB_0 \cos(\omega t + \phi_0)$ $V_{emf} = AB_0 \omega \sin(\omega t + \phi_0)$ $I_{amp} = \frac{AB_0 \omega}{R} \quad \omega = 2\pi f = 2\pi \frac{\text{rpm}}{60}$ Common loop areas	
Shape	Area A
Square (side a)	a^2
Rectangle (l \times w)	lw
Circle (radius r)	\pi r^2
Equil. triangle (side a)	\frac{\sqrt{3}}{4} a^2
Any triangle	\frac{1}{2} bh

SI PREFIXES

	Prefix	Sym	Value	Prefix	Sym	Value
pico	p		10^{-12}	kilo	k	10^3
nano	n		10^{-9}	mega	M	10^6
micro	\mu		10^{-6}	giga	G	10^9
milli	m		10^{-3}	tera	T	10^{12}

j IDENTITIES

Expression	Result	Expression	Result
j^2	-1	j \times (-j)	1
1/j	-j	-1/j	j
j^3	-j	j^4	1
e^{-j\pi/2}	-j	e^{j\pi/2}	j
e^{j\pi}	-1	e^{j2\pi}	1

DISPLACEMENT & CONDUCTION CURRENT

Conduction *resistive, \sigma \neq 0*

E = \frac{V(t)}{d} \quad J_c = \sigma E \quad I_c = J_c \cdot A = \frac{\sigma A}{d} V(t)

I_c = \frac{\sigma A}{\underbrace{d}_{1/R}} V(t) \iff I = \frac{V}{R} \Rightarrow R = \frac{d}{\sigma A}

Current proportional to V directly \rightarrow behaves like a resistor.

Displacement *capacitive, changing E*

J_d = \epsilon \frac{\partial E}{\partial t} \quad I_d = J_d \cdot A = \frac{\epsilon_r \epsilon_0 A}{d} \frac{dV}{dt}

I_d = \frac{\epsilon_r \epsilon_0 A}{\underbrace{d}_C} \frac{dV}{dt} \iff I = C \frac{dV}{dt} \Rightarrow C = \frac{\epsilon_r \epsilon_0 A}{d}

Current proportional to dV/dt \rightarrow behaves like a capacitor.

Lossy cap circuit *both \sigma and \epsilon_r present*

R \parallel C across V(t): I = I_c + I_d = \frac{V}{R} + C \frac{dV}{dt}

CHARGE-CURRENT CONTINUITY

\nabla \cdot \mathbf{J} = - \frac{\partial \rho_v}{\partial t}

Conductor (steady): \nabla \cdot \mathbf{J} = 0 \Rightarrow \oint_S \mathbf{J} \cdot d\mathbf{s} = 0 (KCL)

CHARGE RELAXATION

Decay *charge injected at t = 0*

\rho_v(t) = \rho_{v0} e^{-t/\tau_r} \quad \tau_r = \frac{\epsilon_r \epsilon_0}{\sigma}

Find \sigma from decay data

\sigma = \frac{-\ln(\rho_v/\rho_{v0}) \cdot \epsilon_r \epsilon_0}{t_1}

Larger \tau_r = slower dissipation = better insulator.

PHASOR METHOD (E \rightarrow H)

- Key relation $\mathbf{E}(z, t) = \text{Re}\{\tilde{\mathbf{E}}(z) e^{j\omega t}\}$
- Euler split $e^{j(\omega t - kz)} = e^{j\omega t} \cdot e^{-jkz}$ strip $e^{j\omega t}$, keep e^{-jkz}
- Time \rightarrow phasor conversions
 $\cos(\omega t - kz) = \text{Re}\{e^{j(\omega t - kz)}\} = \text{Re}\{e^{j\omega t} \cdot e^{-jkz}\} \rightarrow e^{-jkz}$
 $\sin(\omega t - kz) = \cos(\omega t - kz - \frac{\pi}{2}) = \text{Re}\{e^{j(\omega t - kz - \pi/2)}\} = \text{Re}\{e^{-j\pi/2} \cdot e^{j\omega t} \cdot e^{-jkz}\} \rightarrow -j e^{-jkz}$
- Faraday in phasor domain (plane wave: only $\partial/\partial z$ survives)
 $\tilde{\mathbf{H}} = - \frac{1}{j\omega\mu} \nabla \times \tilde{\mathbf{E}}$
- Phasor \rightarrow time domain $\mathbf{H}(z, t) = \text{Re}\{\tilde{\mathbf{H}} e^{j\omega t}\}$
 $\text{Re}\{e^{j(\omega t - kz)}\} = \cos(\omega t - kz)$
 $\text{Re}\{-j e^{j(\omega t - kz)}\} = \sin(\omega t - kz)$

UNIT CIRCLE

Angle	Deg	cos	sin	Q
0	0	1	0	—
\pi/6	30	\sqrt{3}/2	1/2	1
\pi/4	45	\sqrt{2}/2	\sqrt{2}/2	1
\pi/3	60	1/2	\sqrt{3}/2	1
\pi/2	90	0	1	—
2\pi/3	120	-1/2	\sqrt{3}/2	2
3\pi/4	135	-\sqrt{2}/2	\sqrt{2}/2	2
5\pi/6	150	-\sqrt{3}/2	1/2	2
\pi	180	-1	0	—
7\pi/6	210	-\sqrt{3}/2	-1/2	3
5\pi/4	225	-\sqrt{2}/2	-\sqrt{2}/2	3
4\pi/3	240	-1/2	-\sqrt{3}/2	3
3\pi/2	270	0	-1	—
5\pi/3	300	1/2	-\sqrt{3}/2	4
7\pi/4	315	\sqrt{2}/2	-\sqrt{2}/2	4
11\pi/6	330	\sqrt{3}/2	-1/2	4
2\pi	360	1	0	—

FIELDS

$\mathbf{E}$ — electric field (V/m)
 $\mathbf{D} = \epsilon \mathbf{E}$ — elec. flux density (C/m^2)
 $\mathbf{B}$ — mag. flux density (T)
 $\mathbf{H}$ — mag. field intensity (A/m)
 ρ_v — charge density (C/m^3)
 ρ_{v0} — initial charge density
 $\Phi = \int_S \mathbf{B} \cdot d\mathbf{s}$ — flux (Wb)
 $\lambda = N\Phi$ — flux linkage (Wb)

CURRENTS

$J_c = \sigma E$ — cond. density (A/m^2)
 $J_d = \epsilon \partial E / \partial t$ — disp. density
 $I_c = J_c \cdot A$ — cond. current (A)
 $I_d = J_d \cdot A$ — disp. current (A)
 $R = d/(\sigma A)$ — resistance (\Omega)
 $C = \epsilon_r \epsilon_0 A/d$ — capacitance (F)
 $\tau_r = \epsilon_r \epsilon_0 / \sigma$ — relax. time (s)

MATERIALS

$\mu_0 = 4\pi \times 10^{-7}$ H/m
 μ_r — relative permeability
 $\mu = \mu_r \mu_0$ — permeability
 $\epsilon_0 = 8.85 \times 10^{-12}$ F/m
 ϵ_r — relative permittivity
 $\epsilon = \epsilon_r \epsilon_0$ — permittivity
 σ — conductivity (S/m)

CIRCUIT & WAVE

V — voltage (V)
 R — resistance (\Omega)
 C — capacitance (F)
 $\omega = 2\pi f$ — angular freq (rad/s)
 $k = \omega \sqrt{\mu \epsilon}$ — wave number (m^{-1})
 $\lambda = 2\pi/k$ — wavelength (m)
 $c = 3 \times 10^8$ m/s — speed of light

PHASOR & GEOMETRY

$\eta = \sqrt{\mu/\epsilon}$ — intrinsic imp. (\Omega)
 $\eta_0 = 120\pi \approx 377 \Omega$ (free space)
 $k/(\omega\mu) = 1/\eta$
 j — imaginary unit ($j^2 = -1$)
 $\tilde{\mathbf{E}}$ — phasor (drop $e^{j\omega t}$)
 λ — area (m^2); d — sep. (m)
 N — turns; r — radial dist. (m)

PLANE WAVE PARAMETERS (LOSSLESS)

Angular frequency ω : rad/s; f : Hz
 $\omega = 2\pi f \quad f = \frac{\omega}{2\pi}$

Phase velocity m/s ; nonmagnetic: $\mu_r = 1$
 $u_p = \frac{c}{\sqrt{\epsilon_r}} \quad c = 3 \times 10^8 \text{ m/s}$

Wavenumber k rad/m
 $k = \frac{\omega}{u_p} = \frac{2\pi}{\lambda} = \frac{\omega\sqrt{\epsilon_r}}{c}$

Wavelength & impedance $m \text{ \& } \Omega$
 $\lambda = \frac{u_p}{f} = \frac{2\pi}{k} \text{ (m)} \quad \eta = \frac{\eta_0}{\sqrt{\epsilon_r}} \text{ (}\Omega\text{)}, \quad \eta_0 = 377 \Omega$

Order: $\omega \rightarrow u_p \rightarrow k \rightarrow \lambda \rightarrow \eta$. Base: $\mathbf{E} = E_0 \cos(\omega t \pm kx + \phi_0)\hat{e}$.

LOSSLESS PLANE WAVE — E AND H

General E
 $\mathbf{E} = E_0 \cos(\omega t - k\hat{k} \cdot \mathbf{r} + \phi_0)\hat{e}$
 $\hat{k}$ = direction of travel (unit vector), e.g. $+y \Rightarrow \hat{k} = \hat{y}$.
 k = wavenumber (rad/m): how fast phase changes in space;
 $k = \omega\sqrt{\epsilon_r}/c = 2\pi/\lambda$.
 ϕ_0 = initial phase constant (rad): shift set by given condition at known t , position.
 $\hat{e}$ = polarization direction of $\mathbf{E}$ (unit vector), e.g. E along $x \Rightarrow \hat{e} = \hat{x}$.
 $\mathbf{r} = x\hat{x} + y\hat{y} + z\hat{z}$, so $\hat{k} \cdot \mathbf{r}$ picks the axis, e.g. $\hat{k} = \hat{y} \Rightarrow \hat{k} \cdot \mathbf{r} = y$.
 $\mathbf{H}$ from $\mathbf{E}$, $\hat{E}$, $\hat{H}$ form right-hand set
 $\mathbf{H} = \frac{1}{\eta} (\hat{k} \times \mathbf{E})$

Find ϕ_0 given $E = E_1$ at $t = 0$, position r_0
 $E_0 \cos(-kr_0 + \phi_0) = E_1 \Rightarrow \phi_0 = \cos^{-1}\left(\frac{E_1}{E_0}\right) + kr_0$
 $\cos^{-1}$ gives $[0, \pi]$; take ϕ_0 in that range.

LOSSLESS vs. LOSSY — E & H

	Lossless ($\sigma = 0$)	Lossy ($\sigma \neq 0$)
Impedance Prop.	$\eta = \sqrt{\mu/\epsilon}$	$\eta_c = \eta_c e^{j\theta_\eta}$ $e^{-\alpha z} e^{-j\beta z}$
$\mathbf{E}(t)$	$\text{Re}\{\tilde{\mathbf{E}} e^{j\omega t}\}$ (same)	
$\mathbf{H}(t)$	$\text{Re}\{\tilde{\mathbf{H}} e^{j\omega t}\}$ (same)	
$\tilde{\mathbf{H}}$ from $\tilde{\mathbf{E}}$	$\frac{1}{\eta} (\hat{k} \times \tilde{\mathbf{E}})$	$\frac{1}{\eta_c} (\hat{k} \times \tilde{\mathbf{E}})$
$\tilde{\mathbf{E}}$ from $\tilde{\mathbf{H}}$	$-\eta (\hat{k} \times \tilde{\mathbf{H}})$	$-\eta_c (\hat{k} \times \tilde{\mathbf{H}})$
Phase	in phase	$\mathbf{H}$ lags $\mathbf{E}$ by θ_η
Lossless shortcuts (wave in $+z$, $\mathbf{E}$ along $\hat{e}$):		
$\mathbf{E}(z, t)$	$E_0 \cos(\omega t - kz + \phi)\hat{e}$	
$\mathbf{H}(z, t)$	$\frac{E_0}{\eta} \cos(\omega t - kz + \phi) (\hat{k} \times \hat{e})$	
$\mathbf{H}(t)$ direct	$\frac{1}{\eta} (\hat{k} \times \mathbf{E}(t))$	
$\mathbf{E}(t)$ direct	$-\eta (\hat{k} \times \mathbf{H}(t))$	

DIRECTION OF PROPAGATION

Arg. contains	$\hat{k}$	Arg. contains	$\hat{k}$
$\omega t - kz$	$+\hat{z}$	$\omega t + kz$	$-\hat{z}$
$\omega t - ky$	$+\hat{y}$	$\omega t + ky$	$-\hat{y}$
$\omega t - kx$	$+\hat{x}$	$\omega t + kx$	$-\hat{x}$

Minus before k -axis $\Rightarrow +$ direction. Plus $\Rightarrow -$ direction.

$\hat{k} \times \hat{E}$ — FIND $\hat{H}$ DIRECTION

$\hat{k}$	$\hat{E}$	$\hat{H}$	$\hat{k}$	$\hat{E}$	$\hat{H}$
$+\hat{z}$	$\hat{x}$	$+\hat{y}$	$+\hat{z}$	$\hat{y}$	$-\hat{x}$
$-\hat{z}$	$\hat{x}$	$-\hat{y}$	$-\hat{z}$	$\hat{y}$	$+\hat{x}$
$+\hat{y}$	$\hat{x}$	$-\hat{z}$	$+\hat{y}$	$\hat{z}$	$+\hat{x}$
$-\hat{y}$	$\hat{x}$	$+\hat{z}$	$-\hat{y}$	$\hat{z}$	$-\hat{x}$
$+\hat{x}$	$\hat{y}$	$+\hat{z}$	$+\hat{x}$	$\hat{z}$	$-\hat{y}$
$-\hat{x}$	$\hat{y}$	$-\hat{z}$	$-\hat{x}$	$\hat{z}$	$+\hat{y}$

Neg. $\hat{E}$: flip $\hat{H}$ sign. $\hat{k} \times \hat{k} = \mathbf{0}$; any $\hat{a} \times \hat{a} = \mathbf{0}$.
Cyclic: $\hat{x} \times \hat{y} = \hat{z}$, $\hat{y} \times \hat{z} = \hat{x}$, $\hat{z} \times \hat{x} = \hat{y}$. Reverse $\Rightarrow$ flip sign.

TRIG PHASE SHIFTS ($\theta \equiv \omega t - kz$)

Input	Result	Input	Result
$\sin(\theta + \pi/2)$	$\cos \theta$	$\cos(\theta + \pi/2)$	$-\sin \theta$
$\sin(\theta - \pi/2)$	$-\cos \theta$	$\cos(\theta - \pi/2)$	$\sin \theta$
$\sin(\theta + \pi)$	$-\sin \theta$	$\cos(\theta + \pi)$	$-\cos \theta$
$\sin(\theta - \pi)$	$-\sin \theta$	$\cos(\theta - \pi)$	$-\cos \theta$

WAVE PARAMS

$\omega = 2\pi f$ — ang. freq (rad/s)
 $k = \omega\sqrt{\epsilon_r}/c$ — wavenumber (rad/m)
 $\lambda = 2\pi/k$ — wavelength (m)
 $u_p = c/\sqrt{\epsilon_r}$ — phase vel. (m/s)
 $\eta = \eta_0/\sqrt{\epsilon_r}$ — impedance (Ω)
 $c = 3 \times 10^8$ m/s
 $\eta_0 = 377 \Omega$ (free space)

LOSSLESS MEDIA

$\sigma = 0$ (vacuum, air, ideal dielectric)
 $\epsilon'' = \sigma/\omega = 0 \Rightarrow \epsilon = \epsilon'$ (real)
 $\alpha = 0$; no attenuation
 $\eta = \eta_0/\sqrt{\epsilon_r}$ real (Ω)
 $\eta_0 = 377 \Omega$ (free space)
 $\mathbf{E}$ and $\mathbf{H}$ in phase ($\theta_\eta = 0$)

LOSSY MEDIA

α — atten. const (Np/m)
 β — phase const (rad/m)
 $\gamma = \alpha + j\beta$ — prop. const (m⁻¹)
 η_c — complex impedance (Ω)
 $\epsilon'' = \epsilon_r \epsilon_0$; $\epsilon'' = \sigma/\omega$ (F/m)
 μ_r — rel. permeability ($\mu_r = 1$: nonmagnetic)
 $\mu = \mu_r \mu_0$; $\mu_0 = 4\pi \times 10^{-7}$ H/m
 $\delta_s = 1/\alpha$ — skin depth (m)

CIRCULAR WAVES

$\tilde{\mathbf{E}}_R = a_R(\hat{x} + e^{-j\pi/2}\hat{y})e^{-jkz} = a_R(\hat{x} - j\hat{y})e^{-jkz}$
 $\tilde{\mathbf{E}}_L = a_L(\hat{x} + e^{+j\pi/2}\hat{y})e^{-jkz} = a_L(\hat{x} + j\hat{y})e^{-jkz}$
 a_R, a_L, a_x in V/m; k in rad/m
Linear: $a_R = a_L = a_x/2$
 $-j = e^{-j\pi/2}$: $\cos \rightarrow \sin$
 $+j = e^{+j\pi/2}$: $\cos \rightarrow -\sin$

USEFUL NUMBERS

$\sqrt{2.56} = 1.6$; $\sqrt{9} = 3$
 $\sqrt{2.5} \approx 1.581$; $\sqrt{2} \approx 1.414$
 $\arccos(2/3) \approx 48.2^\circ = 0.84$ rad
 $\arctan(4/3) \approx 53.1^\circ = 0.927$ rad
 $\arctan(3/4) \approx 36.9^\circ = 0.644$ rad
 $\arctan(24/7) \approx 73.7^\circ = 1.287$ rad

POLARIZATION — GENERAL WAVE

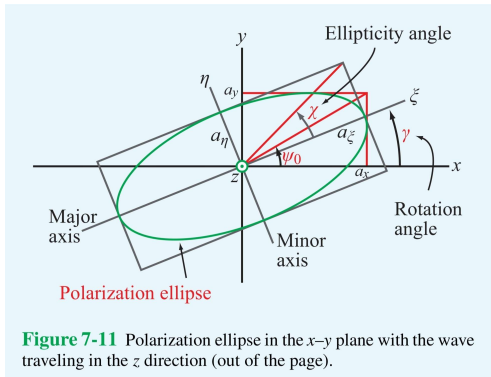


Figure 7-11 Polarization ellipse in the x - y plane with the wave traveling in the z direction (out of the page).

$\mathbf{E} = a_x \cos(\omega t - kz)\hat{x} + a_y \cos(\omega t - kz + \delta)\hat{y}$
 a_x, a_y : bounding box half-widths (V/m); δ : phase diff (rad)
 $\delta = 0$ or $\pi \Rightarrow$ linear pol. ($\chi = 0$, no ellipse)
Auxiliary angle $\psi_0 = \arctan(a_y/a_x) \in (0, \pi/2)$
Rotation angle γ (major axis from $\hat{x}$) $\gamma \in [0, \pi)$
 $\tan(2\gamma) = \tan(2\psi_0) \cos \delta$
If $\text{sign}(\gamma) \neq \text{sign}(\delta)$: $\gamma \leftarrow \gamma \pm \frac{\pi}{2}$.
Ellipticity angle χ $\chi \in [-\pi/4, \pi/4]$
 $\sin(2\chi) = \sin(2\psi_0) \sin \delta$
Axial ratio $R = 1/\tan|\chi|$ major axis = $R \times$ minor; $R \geq 1$

χ SHAPE & HANDEDNESS

χ describes the shape of the ellipse and rotation direction.

χ (rad)	Polarization Type	Handedness
0	Linear	None
$(0, \pi/4)$	RHEP	RH (CCW)
$\pi/4$	RHC	RH (CCW)
$-\pi/4$	LHC	LH (CW)
$(-\pi/4, 0)$	LHEP	LH (CW)

QUADRANT RULE FOR $\tan(2\gamma)$

$N = \sin(2\psi_0) \cos \delta, \quad D = \cos(2\psi_0)$:

N	D	2γ (deg)	2γ (rad)
+	+	$\arctan(N/D)$	$\arctan(N/D)$
+	-	$180^\circ - \arctan N/D $	$\pi - \arctan N/D $
-	-	$180^\circ + \arctan N/D $	$\pi + \arctan N/D $
-	+	$360^\circ - \arctan N/D $	$2\pi - \arctan N/D $

$\gamma = (2\gamma)/2, \quad D = 0 \Rightarrow 2\gamma = \frac{\pi}{2} \Rightarrow \gamma = \frac{\pi}{4}$.
Convert: $\theta_{\text{rad}} = \theta_0 \times \frac{\pi}{180}$; $\theta_0 = \theta_{\text{rad}} \times \frac{180}{\pi}$.

PHASOR $\leftrightarrow$ TIME DOMAIN

Phasor coeff	$\text{Re}\{(\cdot) e^{j\omega t} e^{-\alpha z} e^{-j\beta z}\}$
$A (= Ae^{j\cdot 0})$	$A \cos(\omega t - \beta z)$
$-jA (= Ae^{-j\pi/2})$	$A \sin(\omega t - \beta z)$
$+jA (= Ae^{+j\pi/2})$	$-A \sin(\omega t - \beta z)$
$-A (= Ae^{\pm j\pi})$	$-A \cos(\omega t - \beta z)$
$Ae^{j\phi}$ (general)	$A \cos(\omega t - \beta z + \phi)$
$A + jB (= Z e^{j\theta})$	$ Z \cos(\omega t - \beta z + \theta)$

$|Z| = \sqrt{A^2 + B^2}, \quad \theta = \arctan(B/A)$ (check quadrant)

AVERAGE POWER DENSITY (POYNTING)

General W/m^2
 $\mathbf{S}_{\text{av}} = \frac{1}{2} \text{Re}\{\tilde{\mathbf{E}} \times \tilde{\mathbf{H}}^*\}$
Lossless shortcut $|E_0|^2 = a_x^2 + a_y^2 + a_z^2$
 $\mathbf{S}_{\text{av}} = \frac{|E_0|^2}{2\eta} \hat{k}$
Lossy medium $\eta_c = |\eta_c| e^{j\theta_\eta}$; wave in $+\hat{z}$
 $\mathbf{S}_{\text{av}} = \frac{|\tilde{\mathbf{E}}(0)|^2}{2|\eta_c|} e^{-2\alpha z} \cos \theta_\eta \hat{z}$
Direction = $\hat{k}$. If wave goes in $-\hat{x}$, then $\mathbf{S}_{\text{av}}$ is a negative x -component.

DECIBELS & ATTENUATION

$G = 10 \log(P_1/P_2) = 20 \log(|E_1|/|E_2|)$ (dB)
 $A = -8.69 \alpha z$ (dB); α (dB/m) $\equiv 8.69 \alpha$ (Np/m)

LOSSY MEDIA — CLASSIFICATION

Loss tangent

ϵ''/ϵ'	Type	Use
> 100	Good conductor	GC approx
0.01 to 100	Quasi-conductor	Exact eqs
< 0.01	Low-loss dielectric	LD approx

$\epsilon' = \epsilon_r \epsilon_0$; $\epsilon'' = \sigma/\omega$; nonmag.: $\mu = \mu_0$; free space: $\epsilon_r = \mu_r = 1$.

ANY MEDIUM — EXACT ($X = \sqrt{1 + (\epsilon''/\epsilon')^2}$)

$\alpha = \omega \sqrt{\frac{\mu \epsilon'}{2}} \sqrt{X-1}$ Np/m, $\beta = \omega \sqrt{\frac{\mu \epsilon'}{2}} \sqrt{X+1}$ rad/m
 $\lambda = \frac{2\pi}{\beta} = \frac{u_p}{f}$ (m), $u_p = \frac{\omega}{\beta}$ (m/s)
 $\eta_c = \frac{\eta}{X^{1/2}} e^{j\theta_\eta}$ (Ω), $\theta_\eta = \frac{1}{2} \arctan \frac{\sigma}{\omega \epsilon'}$ (rad)
Rect: $\eta_c = |\eta_c| \cos \theta_\eta + j|\eta_c| \sin \theta_\eta$, $|\eta_c| = \eta/X^{1/2}$
 $\eta = \eta_0/\sqrt{\epsilon_r}$; $\epsilon' = \epsilon_r \epsilon_0$.

SKIN DEPTH δ_s (m) — ANY LOSSY MEDIUM

General: $\delta_s = 1/\alpha$ $|E(z)| = E_0 e^{-z/\delta_s}$; lossless: $\alpha = 0 \Rightarrow$ no decay
Low-loss ($\epsilon''/\epsilon' \ll 1$) $\delta_s \approx 2/(\sigma\eta)$
Good conductor ($\epsilon''/\epsilon' \gg 1$) $\delta_s \approx 1/\sqrt{\pi f \mu \sigma}$

LOW-LOSS MEDIUM ($\epsilon''/\epsilon' \ll 1$)

$\alpha \approx \frac{\sigma}{2} \sqrt{\frac{\mu}{\epsilon'}} = \frac{\sigma \eta}{2}$ (Np/m)
 $\beta \approx \omega \sqrt{\mu \epsilon'} = \frac{\omega \sqrt{\epsilon_r}}{c}$ (rad/m), $u_p \approx \frac{c}{\sqrt{\epsilon_r}}$ (m/s)
 $\eta_c \approx \sqrt{\frac{\mu}{\epsilon'}} = \eta$ (Ω , $\angle \approx 0$)

GOOD CONDUCTOR ($\epsilon''/\epsilon' \gg 1$)

$\alpha \approx \beta \approx \sqrt{\pi f \mu \sigma}$ (Np/m, rad/m)
 $u_p \approx \sqrt{4\pi f / \mu \sigma}$ (m/s), $\lambda \approx u_p/f$ (m)
 $\eta_c \approx (1+j)\sqrt{\frac{\pi f \mu}{\sigma}} \approx (1+j)\frac{\alpha}{\sigma}$ (Ω)

$\tilde{\mathbf{H}}$ PHASOR $\rightarrow \tilde{\mathbf{E}}$ IN LOSSY MEDIA

Step 1 — read α, β
 $\tilde{\mathbf{H}} \propto e^{-\alpha y} e^{-j\beta y} \Rightarrow \gamma = \alpha + j\beta$
Step 2 — η_c (nonmagnetic: $\mu_r = 1$)
 $\eta_c = \frac{j\omega \mu_0}{\gamma} = \frac{\omega \mu_0 (\beta + j\alpha)}{\alpha^2 + \beta^2}$
Step 3 — find $\tilde{\mathbf{E}}$
 $\tilde{\mathbf{E}} = -\eta_c (\hat{k} \times \tilde{\mathbf{H}})$
Step 4 — time domain
 $Ae^{j\phi} e^{-\alpha y} \text{Re}\{e^{j\omega t}\} \rightarrow Ae^{-\alpha y} \cos(\omega t - \beta y + \phi)$
Convert each component $A + jB \rightarrow |Z|\angle\theta$ first.