


TERMO DE ACEITE TÉCNICO

Solicitante: SES - Secretaria de Estado de Saúde de Minas Gerais

NOC/Operadora: Bruno Resston Moreira Operadora/Cliente: Jair de Oliveira

GRE/Prodemge: Márlu da Silva Santos Responsável/cliente: Leonilda Alves Machado

ConsórcioVSAT-IDPorta kbpsPlataformaSTM/VodanetSES-LAAR-3655384/153VSAT

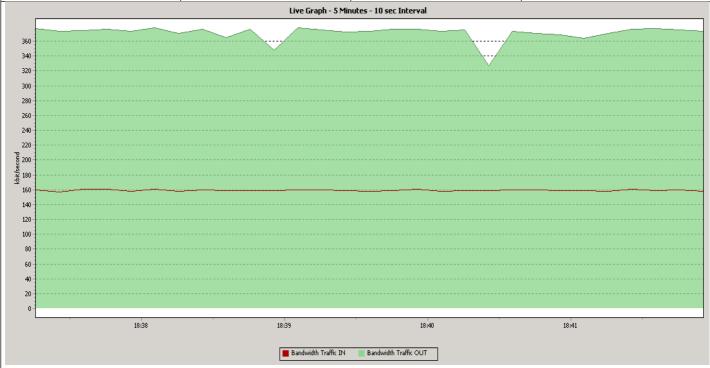

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 15 8PSK-5/6 (SNR threshold: 10.6 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable
* 0 0 13.333000 11.588250 DVB-S2 2 Yes
1 1 0.000000 0.000000 DVB-S2 0 No

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 65281, Prodemge@Vodanet

Frequency : 11.588812 GHz Symbol Rate : 13.333293 Msps

S2 ModCod

- receiving : 4 QPSK-1/2 - current max : 15 8PSK-5/6

Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.25
SNR : 12.6 dB
Input Power : -36 dBm

```
Satellite (DVB) TX Configuration
Auto start : Enabled IDU Output Power : -18 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : max
EIRP
                    : max
Default CW Frequency: 0.000000 GHz
                    : VC-Mux
ATM mode
Header Compression : UDP/IP/DSM-CC
Satellite (DVB) Transmitter Status
-----
: On (TDMA)

IDU Output Power : -9.4 dBm

ODU Output Power : 33.5 dBm

EIRP
Es/No
                    : 13.0 dB
Header Compression : DSM-CC
Timing correction : 84 us (261627 us)
Frequency correction: -70 Hz
IP DVB: 10.148.2.67/32
Pinging 10.146.6.1 with 32 bytes of data:
Reply from 10.146.6.1: bytes=32 time=566ms TTL=62
Reply from 10.146.6.1: bytes=32 time=540ms TTL=62
Reply from 10.146.6.1: bytes=32 time=593ms TTL=62
Reply from 10.146.6.1: bytes=32 time=604ms TTL=62
Reply from 10.146.6.1: bytes=32 time=560ms TTL=62
Reply from 10.146.6.1: bytes=32 time=548ms TTL=62
Reply from 10.146.6.1: bytes=32 time=560ms TTL=62
Reply from 10.146.6.1: bytes=32 time=580ms TTL=62
Reply from 10.146.6.1: bytes=32 time=591ms TTL=62
Reply from 10.146.6.1: bytes=32 time=612ms TTL=62
Ping statistics for 10.146.6.1:
    Packets: Sent = 10, Received = 10, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 540ms, Maximum = 612ms, Average = 575ms
```