



TERMO DE ACEITE TÉCNICO

Solicitante: SES – Secretaria de Estado de Saúde de Minas Gerais

Data: 06/01/2012

NOC/Operadora: Renan Borges Sousa

Operadora/Cliente: Antônio Gonçalves

GRE/Prodemge: Gilcimar Cardoso


Responsável/cliente: Grazielle

Consórcio
STM/Vodanet

VSAT-ID
SES-BEAS-663

Porta kbps
384/153

Plataforma
VSAT

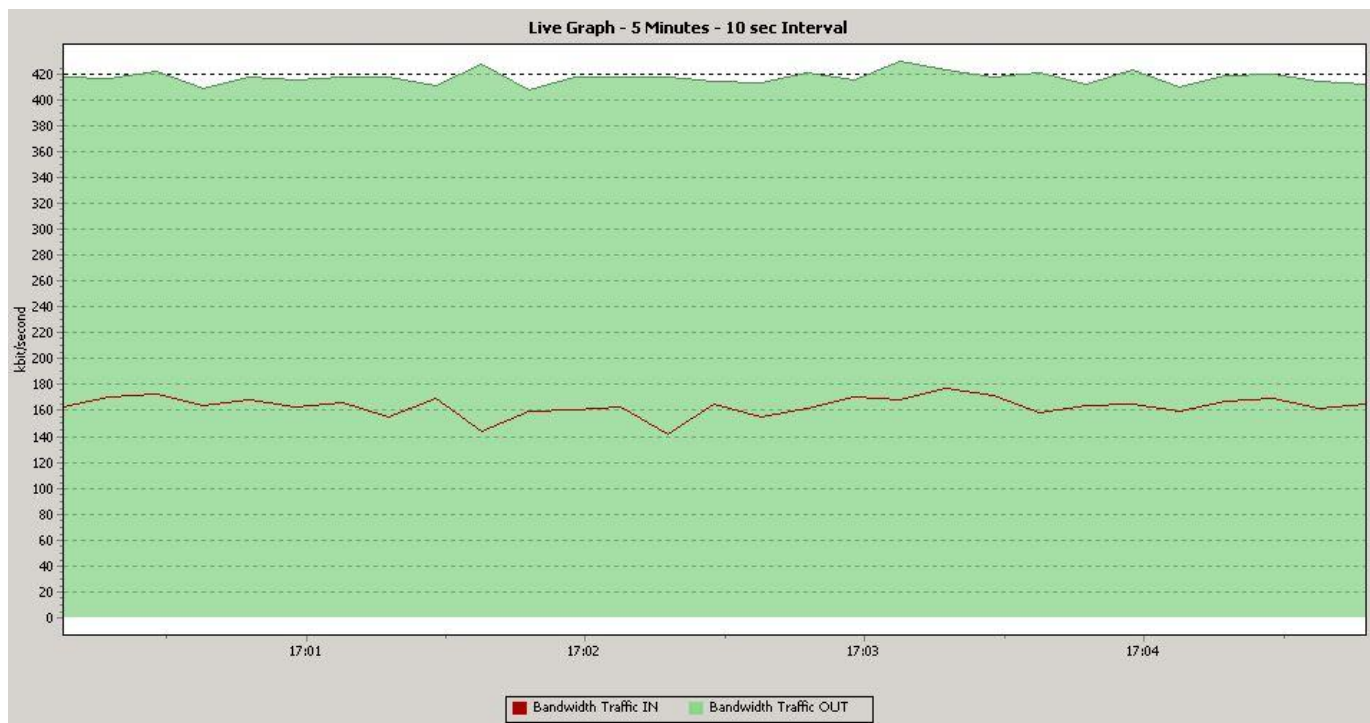

Satellite (DVB) RX Configuration

Auto start : Enabled
Max MODCOD : 15 8PSK-5/6 (SNR threshold: 9.6 dB)
ACM Latency : On
RX watchdog : 15 minute

Idx	Pri	SymbRate[Msp/s]	Freq[GHz]	Mode	PopId	Enable
* 0	0	7.120000	11.583700	DVB-S2	2	Yes
1	1	0.000000	0.000000	DVB-S2	2	Yes

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 65281, Prodemge@Vodanet
Frequency : 11.584167 GHz
Symbol Rate : 7.119921 Msp/s
S2 ModCod
- receiving : 13 8PSK-2/3
- current max : 15 8PSK-5/6
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.25
SNR : 15.4 dB
Input Power : -28 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled
IDU Output Power : -11 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 33.0 dBm
EIRP : 46.5 dBW
Default CW Frequency: 0.000000 GHz
ATM mode : VC-Mux
Header Compression : UDP/IP/DSM-CC

Satellite (DVB) Transmitter Status

State : On (TDMA)
IDU Output Power : -19.0 dBm
ODU Output Power : 32.8 dBm
EIRP : 46.3 dBW
Es/No : 14.0 dB
Header Compression : DSM-CC
Timing correction : -458 us (271203 us)
Frequency correction: 60 Hz

IP DVB 10.148.0.56/32

Pinging 10.144.18.1 with 32 bytes of data:

Reply from 10.144.18.1: bytes=32 time=548ms TTL=62
Reply from 10.144.18.1: bytes=32 time=1715ms TTL=62
Reply from 10.144.18.1: bytes=32 time=554ms TTL=62
Reply from 10.144.18.1: bytes=32 time=560ms TTL=62
Reply from 10.144.18.1: bytes=32 time=581ms TTL=62
Reply from 10.144.18.1: bytes=32 time=591ms TTL=62
Reply from 10.144.18.1: bytes=32 time=548ms TTL=62
Reply from 10.144.18.1: bytes=32 time=536ms TTL=62
Reply from 10.144.18.1: bytes=32 time=546ms TTL=62
Reply from 10.144.18.1: bytes=32 time=567ms TTL=62

Ping statistics for 10.144.18.1:

Packets: Sent = 10, Received = 10, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 536ms, Maximum = 1715ms, Average = 674ms