


TERMO DE ACEITE TÉCNICO

Solicitante: SES - Secretaria de Estado de Saúde de Minas Gerais

NOC/Operadora: Renan Borges Sousa Operadora/Cliente: Manoel Martins de Oliveira Responsável/cliente: Poliana David Sanvlard Bornelas GRE/Prodemge: Márlu Martins de Oliveira VSAT-ID Plataforma Consórcio Porta kbps STM/Vodanet SES-CAGA-0948 384/153 **VSAT**

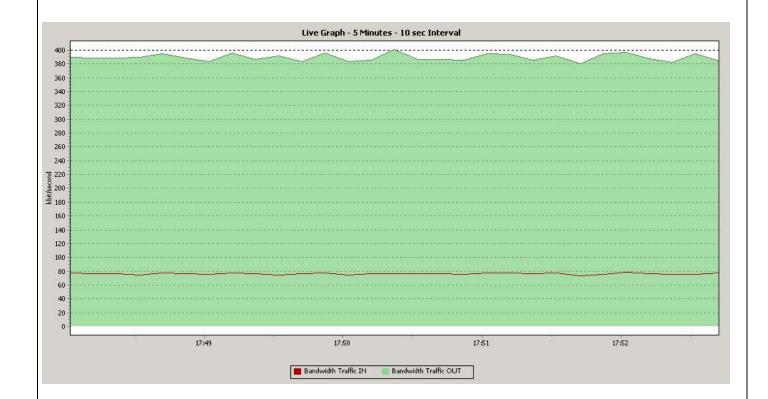

Satellite (DVB) RX Configuration

Auto start : Enabled

: 15 8PSK-5/6 (SNR threshold: 9.6 dB) Max MODCOD

: On ACM Latency

: 15 minute RX watchdog

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable 11.588250 DVB-S2 2 * 0 0 13.333000 Yes

Satellite (DVB) Receiver Status

Rx State : On

: Forward link up DVB State

: 65281, Prodemge@Vodanet Network

Frequency : 11.588335 GHz Symbol Rate : 13.332969 Msps

S2 ModCod

- receiving : 4 QPSK-1/2 16APSK-5/6 - current max : 21

Pilot : On

Frame length : Short frame

DVB S2 Mode : ACM Roll off : 0.25 SNR : 13.8 dB Input Power : -30 dBm

```
Satellite (DVB) TX Configuration
______
Auto start
                   : Enabled
IDU output power : -11 dBm EIRP : 42.0 dBW
Default CW Frequency: 0.000000 GHz
ATM mode : VC-Mux
Header Compression : UDP/IP/DSM-CC
Satellite (DVB) Transmitter Status
______
State : On (TDMA)

IDU Output Power : -22.3 dBm

ODU Output Power : 28.6 dBm
EIRP
                   : 41.9 dBW
Eb/No
                    : 10.5 dB
Header Compression : DSM-CC
Timing correction : -213 us (260880 us)
Frequency correction: -160 Hz
IP DVB 10.148.1.58/32
Pinging 10.145.1.1 with 32 bytes of data:
Reply from 10.145.1.1: bytes=32 time=545ms TTL=62
Reply from 10.145.1.1: bytes=32 time=538ms TTL=62
Reply from 10.145.1.1: bytes=32 time=548ms TTL=62
Reply from 10.145.1.1: bytes=32 time=569ms TTL=62
Reply from 10.145.1.1: bytes=32 time=579ms TTL=62
Reply from 10.145.1.1: bytes=32 time=599ms TTL=62
Reply from 10.145.1.1: bytes=32 time=610ms TTL=62
Reply from 10.145.1.1: bytes=32 time=533ms TTL=62
Reply from 10.145.1.1: bytes=32 time=553ms TTL=62
Reply from 10.145.1.1: bytes=32 time=564ms TTL=62
Ping statistics for 10.145.1.1:
Packets: Sent = 10, Received = 10, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 533ms, Maximum = 610ms, Average = 563ms
```