


TERMO DE ACEITE TÉCNICO

Solicitante: PRODEMGE / SEE

NOC/Operadora: Hernan Alves Operadora/Cliente: Jean Polini

GRE/Prodemge: João Antinossi Responsável/cliente: Manoel Rodrigues de Almeida

> Consórcio **VSAT-ID** Porta kbps **Plataforma** EMC/Vodanet **VSAT** SEE-CHHA-22111 2Mbps

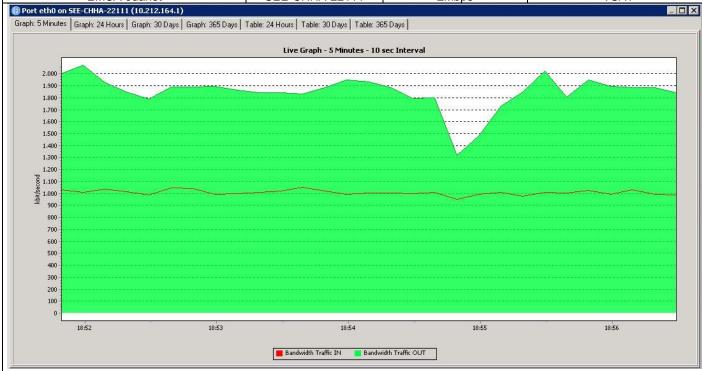

Satellite (DVB) RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName Name

Enable

12.176420 DVB-S2 104 0 0.0 E * 0 0 4.883300

Yes

Satellite (DVB) Receiver Status ______

Rx State : On

DVB State : Forward link up

Network : 65281, Prodemge@Vodanet

: 65281, Prode : 12.176029 GHz Frequency Symbol Rate : 4.882862 Msps

S2 ModCod

- receiving : 4 QPSK-1/2 - current max : 21 16APSK-5/6

Pilot : On Frame length : Short ACM : Short DVB S2 Stream type : MPEG-TS Roll off : 0.20 SNR : 15.4 dB Input Power : -35 dBm # dvb tx show

```
Satellite (DVB) TX Configuration
 -----
Auto start : Enabled IDU Output Power : -20 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 33.2 dBm
                     : 46.5 dBW
EIRP
Default CW Frequency: 0.000000 GHz
                    : VC-Mux
ATM mode
Header Compression : UDP/IP
Satellite (DVB) Transmitter Status
_____
State
                     : On (DVB-RCS2)
: On (DVB-I
IDU Output Power : -16.5 dBm
ODU Output Power : 33.3 dBm
EIRP
                     : 46.6 dBW
Es/No
                     : 13.0 dB
\hbox{{\tt Header Compression}} \quad \hbox{: Disabled} \quad \hbox{{\tt - HC for RCS2 not supported by HUB}}
Timing correction : -325 us (281904 us)
Frequency correction: 120 Hz
# device show
System Information:
   Name
                         : SEE-CHHA-22111
    Location
                         : CHAPADA GA¦CHA - MG
    Contact
   System Up time : 0 days, 00:07:20
CPU Load : 6%
System time(UTC) : 28 October 2017 17:58:42
    Broadcast Message : not set
HW:
    Model
                         : SatLink 2000
                        : 120033
    HW ID
    Main board ID
                        : 120026 R6.2
MAC addresses:
   Ethernet (LAN) : 00:20:0e:10:65:17
Satellite (DVB) : 00:20:0e:10:65:17
# arp show
   NetAddr
                State MacAddr
   10.212.164.2 Dynamic 64:1c:67:62:2e:12 1
Pinging 10.212.164.1 with 32 bytes of data:
Reply from 10.212.164.1: bytes=32 time=563ms TTL=56
Reply from 10.212.164.1: bytes=32 time=554ms TTL=56
Reply from 10.212.164.1: bytes=32 time=614ms TTL=56
Reply from 10.212.164.1: bytes=32 time=576ms TTL=56
Reply from 10.212.164.1: bytes=32 time=629ms TTL=56
Reply from 10.212.164.1: bytes=32 time=598ms TTL=56
Reply from 10.212.164.1: bytes=32 time=570ms TTL=56
Reply from 10.212.164.1: bytes=32 time=613ms TTL=56
Reply from 10.212.164.1: bytes=32 time=654ms TTL=56
Reply from 10.212.164.1: bytes=32 time=601ms TTL=56
Ping statistics for 10.212.164.1:
    Packets: Sent = 10, Received = 10, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 554ms, Maximum = 654ms, Average = 597ms
```

Lista de sites acessados:

<u>www.globo.com</u> – ok <u>www.yahoo.com</u> – ok

 $\underline{www.hotmail.com} - ok$

<u>www.google.com</u> – ok

<u>www.educacao.mg.gov.br</u> – ok

www.prodemge.gov.br – ok

Responsável pelo teste de navegação: Nome: Manoel Rodrigues de Almeida

Função: Diretor MASP: 457 424-0 Telefone 38 36341222

Funcionamento: 07:00 AS 17:30h