



TERMO DE ACEITE TÉCNICO

Solicitante: PRODEMGE / SEE

NOC/Operadora: Pedro Bernardes

Operadora/Cliente: ...

GRE/Prodemge: João Antinossi

Responsável/cliente: ...


Consórcio
EMC/Vodanet

VSAT-ID
SEE-TAIM-23164

Porta kbps
2Mbps

Plataforma
VSAT

Port eth 0 SEE-TAIM-23164 (10.214.170.1)

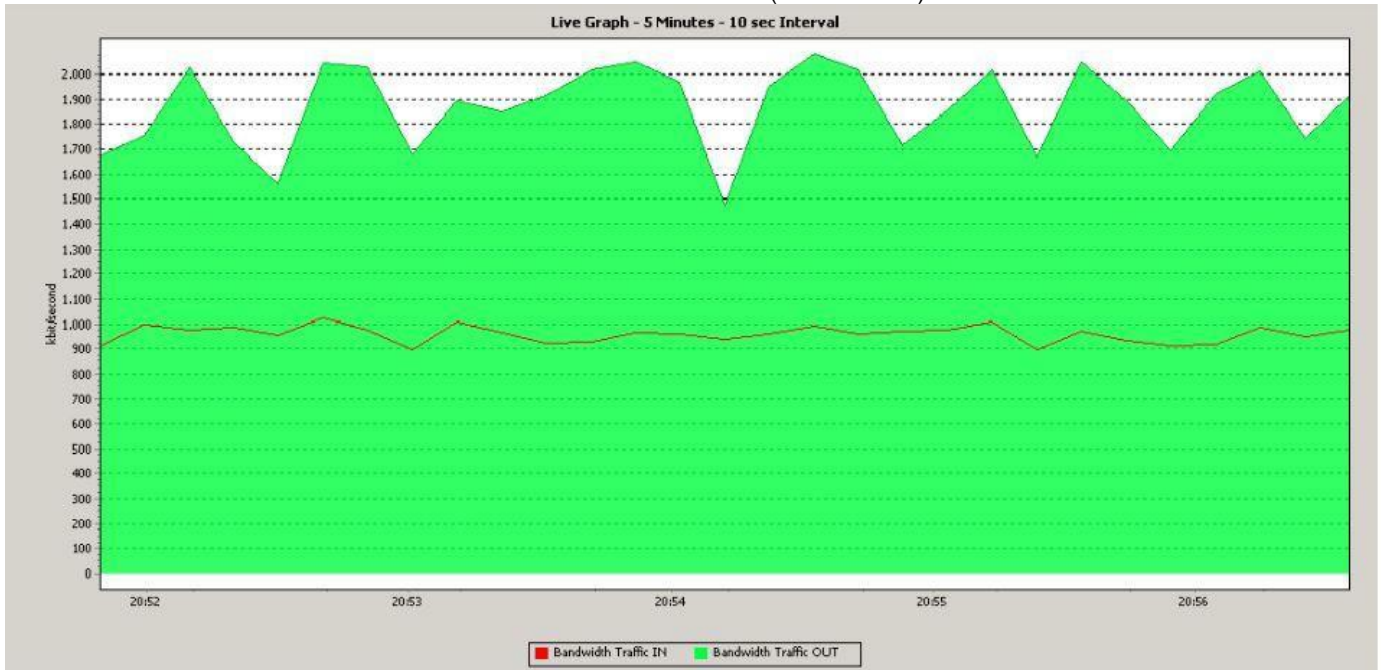

Satellite (DVB) RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Msp/s]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName	Name	Enable
* 0	0	8.883000	12.176420	DVB-S2 104	0	0.0	E		Yes	
1	1	4.883300	12.176420	DVB-S2 104	0	0.0	E		Yes	

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 65281, Prodemge@Vodanet
Frequency : 12.176362 GHz
Symbol Rate : 8.882985 Msp/s
S2 ModCod
- receiving : 4 QPSK-1/2
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 16.1 dB
Input Power : -30 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled
IDU Output Power : -21 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : max
EIRP : max
Default CW Frequency: 0.000000 GHz
ATM mode : VC-Mux
Header Compression : UDP/IP

Satellite (DVB) Transmitter Status

State : On (DVB-RCS2)
IDU Output Power : -16.2 dBm
ODU Output Power : 35.5 dBm
EIRP : 48.8 dBW
Es/No : 13.0 dB
Header Compression : Disabled - HC for RCS2 not supported by HUB
Timing correction : -217 us (266024 us)
Frequency correction: 130 Hz

System Information:

Name : SEE-TAIM-23164
Location : Tarumirim - MG
Contact :
System Up time : 12 days, 21:49:30
CPU Load : 12%
System time(UTC) : 08 January 2018 19:49:53
Broadcast Message : not set

HW:

Model : SatLink 2000
HW ID : 120033
Main board ID : 120026 R6.2

MAC addresses:

Ethernet (LAN) : 00:20:0e:10:5e:78
Satellite (DVB) : 00:20:0e:10:5e:78

Pinging 10.214.170.1 with 32 bytes of data:

Reply from 10.214.170.1: bytes=32 time=522ms TTL=56
Reply from 10.214.170.1: bytes=32 time=545ms TTL=56
Reply from 10.214.170.1: bytes=32 time=580ms TTL=56
Reply from 10.214.170.1: bytes=32 time=567ms TTL=56
Reply from 10.214.170.1: bytes=32 time=526ms TTL=56
Reply from 10.214.170.1: bytes=32 time=535ms TTL=56
Reply from 10.214.170.1: bytes=32 time=614ms TTL=56
Reply from 10.214.170.1: bytes=32 time=546ms TTL=56
Reply from 10.214.170.1: bytes=32 time=595ms TTL=56
Reply from 10.214.170.1: bytes=32 time=682ms TTL=56

Ping statistics for 10.214.170.1:

Packets: Sent = 10, Received = 10, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 522ms, Maximum = 682ms, Average = 571ms

Resp: ...
Cargo: ...
Masp:
Telefone: ...
Horário:

www.hotmail.com
www.google.com
www.prodemge.gov.br
www.globo.com
www.youtube.com