


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Jefferson de Souza Marques Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-31261955-MG256/128VSAT

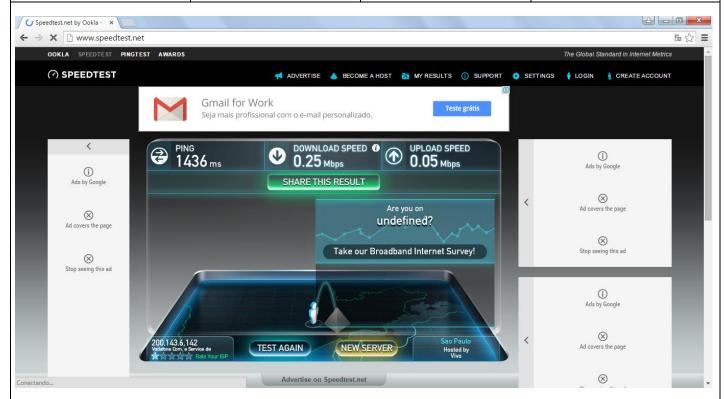

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable
* 0 0 9.320000 12.055825 DVB-S2 4 Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, GlobalIP@Telstar-14R

Frequency : 12.055998 GHz Symbol Rate : 9.319943 Msps

S2 ModCod

- receiving : 15 8PSK-5/6 - current max : 23 16APSK-9/10

Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.25
SNR : 14.5 dB
Input Power : -22 dBm

```
# dvb tx show
Satellite (DVB) TX Configuration
______
Auto start : Enabled IDU Output Power : -30 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 33.7 dBm
                  : 47.0 dBW
EIRP
Default CW Frequency: 0.000000 GHz
ATM mode : VC-Mux
Header Compression : None
Satellite (DVB) Transmitter Status
_____
State : On (TDMA)

IDU Output Power : -22.1 dBm

ODU Output Power : 33.4 dBm
EIRP
                   : 46.7 dBW
Es/No
                   : 14.7 dB
Header Compression : Disabled
Timing correction : -91 us (262636 us)
Frequency correction: -330 Hz
IP DVB 10.53.0.68/32
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=2210 ms
64 bytes from 8.8.8.8: time=900 ms
64 bytes from 8.8.8.8: time=910 ms
64 bytes from 8.8.8.8: time=910 ms
64 bytes from 8.8.8.8: time=1510 ms
--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 900/1280/2210 ms
```