

# TERMO DE ACEITE TÉCNICO

**Solicitante:** VIVO- Projeto Escolas Rurais

**NOC/Operador:** Rogerio Momi Frias


**Cliente:** VIVO

**Empresa**  
EMC Brasil

**VSAT-ID**  
VIVO-PER-26037270-PE

**Link kbps**  
256/128

**Plataforma**  
VSAT

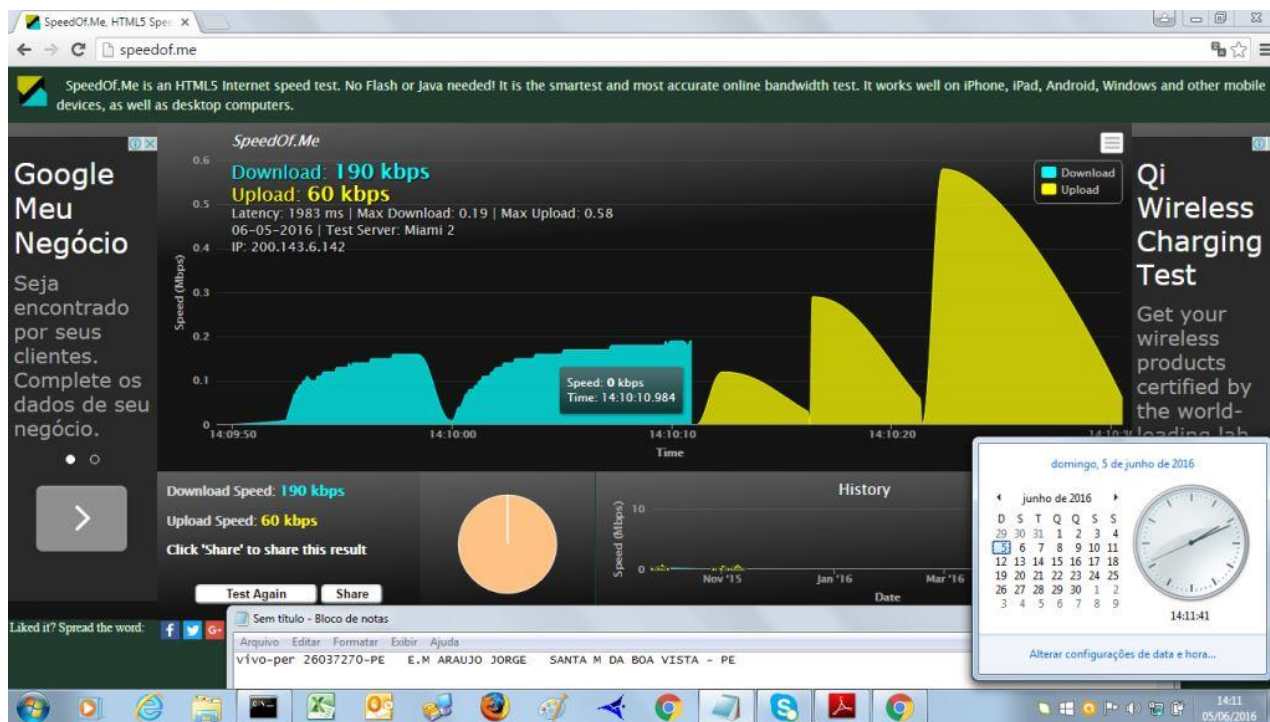

## Satellite (DVB) RX Configuration

Auto start : Enabled  
Max Traffic MODCOD : 23 16APSK-9/10  
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName	Name	Enable
* 0	0	9.320000	12.055825	DVB-S2	102	0	0.0 E		Yes	

## Satellite (DVB) Receiver Status

Rx State : On  
DVB State : Forward link up  
Network : 1326, GlobalIP@Telstar-14R  
Frequency : 12.055837 GHz  
Symbol Rate : 9.319993 Msps  
S2 ModCod  
- receiving : 14 8PSK-3/4  
- current max : 16 8PSK-8/9  
Pilot : On  
Frame length : Short  
DVB S2 Mode : ACM  
DVB S2 Stream type : MPEG-TS  
Roll off : 0.20  
SNR : 13.2 dB  
Input Power : -33 dBm

#### Satellite (DVB) TX Configuration

-----  
Auto start : Enabled  
IDU Output Power : -23 dBm  
IDU Max Output Power: 0.0 dBm  
Default CW Frequency: 14.125500 GHz  
ATM mode : VC-Mux  
Header Compression : None

#### Satellite (DVB) Transmitter Status

-----  
State : On (DVB-RCS)  
IDU Output Power : -23.1 dBm  
Es/No : 13.0 dB  
Header Compression : Disabled  
Timing correction : -168 us (260984 us)  
Frequency correction: 70 Hz

ping 8.8.8.8

64 bytes from 8.8.8.8: time=730 ms  
64 bytes from 8.8.8.8: time=600 ms  
64 bytes from 8.8.8.8: time=640 ms  
64 bytes from 8.8.8.8: time=710 ms  
64 bytes from 8.8.8.8: time=960 ms

--- ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss  
rtt min/avg/max = 600/720/960 ms