



TERMO DE ACEITE TÉCNICO

Solicitante: SES – Secretaria de Estado de Saúde de Minas Gerais

NOC/Operadora: Bruno Resston Moreira

Operadora/Cliente: André da Silva Braz

GRE/Prodemge: Marlú da Silva Santos


Responsável/cliente: Luís Fabiano Gouveia Araújo

Consórcio
STM/Vodanet

VSAT-ID
SES-BANA-3630

Porta kbps
384/153

Plataforma
VSAT

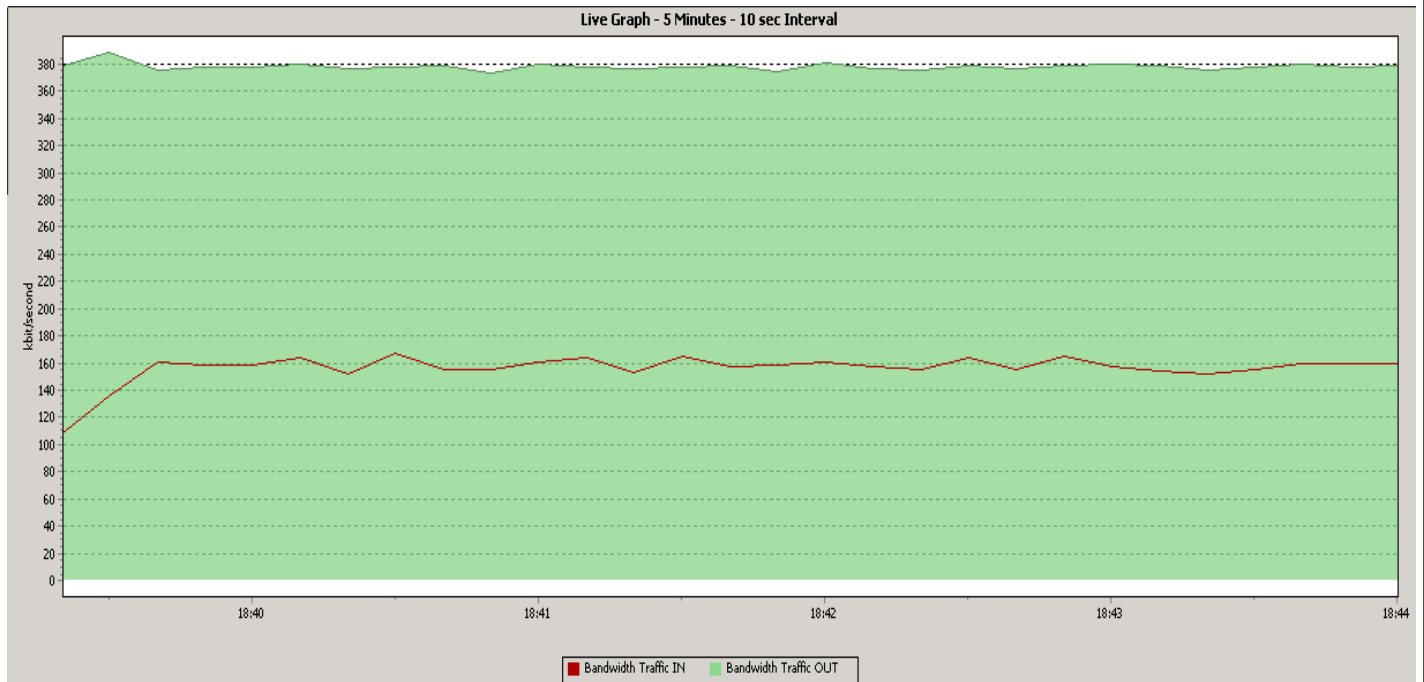

Satellite (DVB) RX Configuration

Auto start : Enabled
Max MODCOD : 15 8PSK-5/6 (SNR threshold: 10.6 dB)
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	Enable
* 0	0	13.333000	11.588250	DVB-S2	2	Yes
1	1	0.000000	0.000000	DVB-S2	2	Yes

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 65281, Prodemge@Vodanet
Frequency : 11.588574 GHz
Symbol Rate : 13.332921 Msps
S2 ModCod
- receiving : 4 QPSK-1/2
- current max : 15 8PSK-5/6
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.25
SNR : 13.3 dB
Input Power : -30 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled
IDU Output Power : -11 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : max
EIRP : max
Default CW Frequency: 0.000000 GHz
ATM mode : VC-Mux
Header Compression : UDP/IP/DSM-CC

Satellite (DVB) Transmitter Status

State : On (TDMA)
IDU Output Power : -22.0 dBm
ODU Output Power : 35.3 dBm
EIRP : 48.6 dBW
Es/No : 12.0 dB
Header Compression : DSM-CC
Timing correction : -54 us (261058 us)
Frequency correction: -120 Hz

IP DVB: 10.148.1.44/32

Pinging 10.145.214.1 with 32 bytes of data:

Reply from 10.145.214.1: bytes=32 time=584ms TTL=62
Reply from 10.145.214.1: bytes=32 time=562ms TTL=62
Reply from 10.145.214.1: bytes=32 time=615ms TTL=62
Reply from 10.145.214.1: bytes=32 time=537ms TTL=62
Reply from 10.145.214.1: bytes=32 time=580ms TTL=62
Reply from 10.145.214.1: bytes=32 time=566ms TTL=62
Reply from 10.145.214.1: bytes=32 time=576ms TTL=62
Reply from 10.145.214.1: bytes=32 time=532ms TTL=62
Reply from 10.145.214.1: bytes=32 time=607ms TTL=62
Reply from 10.145.214.1: bytes=32 time=530ms TTL=62

Ping statistics for 10.145.214.1:

Packets: Sent = 10, Received = 10, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 530ms, Maximum = 615ms, Average = 568ms