
CRYPTO HARD

Fault Atlas

Challenge Setup & Model

Authored by 5h1kh4r. Files: `model.py` and `data.json`. The challenge implements AES-128 with a single-byte fault injection hook in Round 9 right before MixColumns:

```
$ grep -B 2 -A 8 "if rnd == 9" model.py
```

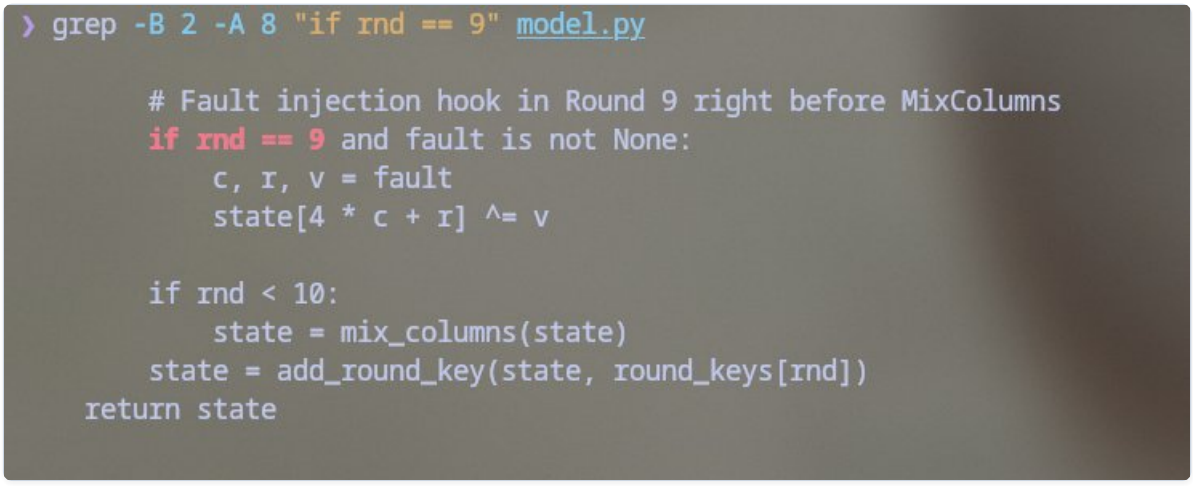

AES Fault Hook Inspection

Solution Script: Fault_Atlas.py (included in attached solution archive)

`data.json` contains 110 records of `(plaintext, correct_ct, faulted_ct)` and an AES-GCM encrypted capsule. However, many records are deliberately corrupted decoys that don't follow AES fault equations.

DFA Propagation (Piret & Quisquater Model)

A single byte error entering MixColumns in Round 9 affects all 4 bytes of that column. Passing through Round 10's ShiftRows disperses these 4 bytes across specific ciphertext diagonals:

- Col 0 -> bytes `0, 13, 10, 7`
- Col 1 -> bytes `4, 1, 14, 11`
- Col 2 -> bytes `8, 5, 2, 15`
- Col 3 -> bytes `12, 9, 6, 3`

Let $C[i]$ and $D[i]$ be the clean and disturbed ciphertext bytes at index i, and $K_{10}[i]$ be candidate Round-10 key bytes: $\Delta_i(k) = \text{InvSBox}(C[i] \oplus k) \oplus \text{InvSBox}(D[i] \oplus k)$

For a legitimate fault in row r of column c, the 4 differences must equal column r of the MDS matrix scaled by non-zero error $e \in \text{GF}(2^8)$: $[\Delta_0, \Delta_1, \Delta_2, \Delta_3]^T = \text{MixColumns} \cdot [0 \dots e \dots 0]^T$

Filtering Decoys & Recovering K_{10}

1. Filter records where exactly the 4 expected diagonal bytes changed between C and D. 2. For each candidate fault row $r \in [0, 3]$, find 4-tuples of (k_0, k_1, k_2, k_3) satisfying the MDS ratio. 3. Majority voting over valid records uniquely locks each 4-byte diagonal of Round Key 10. 4. Run the standard AES-128 key schedule backwards from K_{10} to recover K_0.

Solution Script: Fault_Atlas.py (included in attached solution archive)

Execution & Output

```
$ python3 solve.py
```



DFA Exploitation and Key Inversion Proof

Solution Script: Fault_Atlas.py (included in attached solution archive)

Flag:

Solution Script: Fault_Atlas.py (included in attached solution archive)

RECOVERED FLAG **SecLeaf{f4ult5_d0nt_n33d_t0_b3_h0n35t}**