


Lab SU-1a – SmartRack Access and Wiring Scheme

TNE10006/TNE60006 Lab Infrastructure and Wiring Scheme

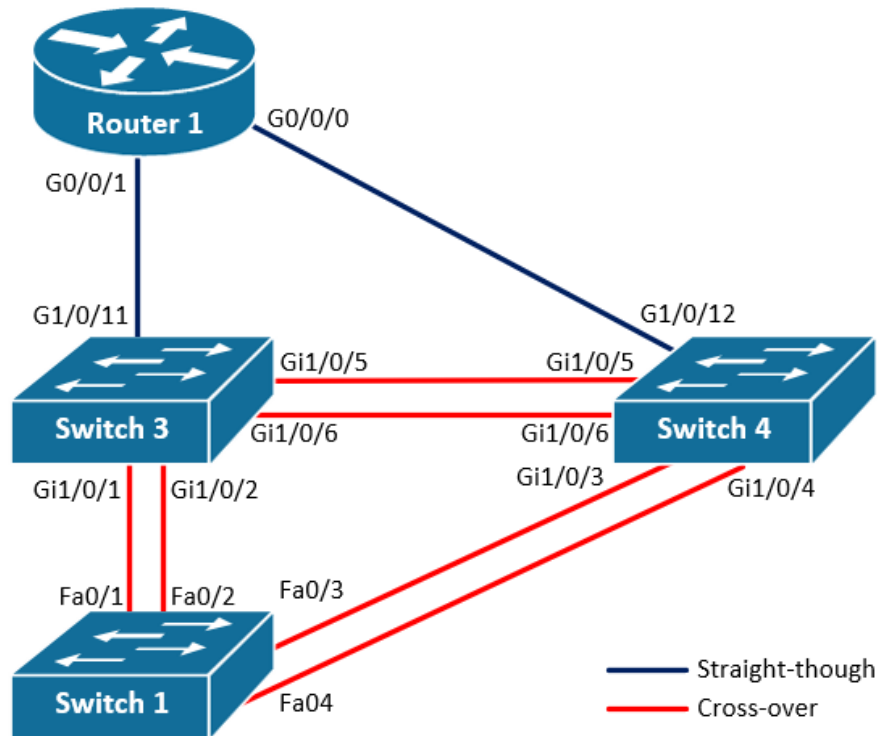

Objectives

1. Understand TNE10006/TNE60006 Lab Infrastructure
2. Remote access networking lab devices

Background / Scenario

Swinburne's Cisco Networking Labs are physically located in the ATC building, in rooms ATC328, ATC329 and ATC330. TNE10006/TNE60006 lab sessions run on ATC328 and ATC329. In each of these two rooms, there are five **Enclosures**, in each Enclosure there are five networking **Kits** and each kit is comprised of 8 cisco network devices:

Device Label	Type	Model
Switch 1 (S1)	Layer 2 Switch	Catalyst 2960
Switch 2 (S1)	Layer 2 Switch	Catalyst 2960
Switch 3 (S3)	Layer 3 Switch	Catalyst 3650
Switch 4 (S4)	Layer 3 Switch	Catalyst 3650
Router 1 (R1)	Router	ISR 4321
Router 2 (R2)	Router	ISR 4321
Router 3 (R3)	Router	ISR 4321
Router 4 (R4)	Router	ISR 4321

TNE10006/TNE60006 lab practices require the use of Switch 1, Switch 3, Switch 4 and Router 1.

In each enclosure there is a **SmartRack** server that physically connects to the console port of all network devices inside the enclosure. This SmartRack server allows us to connect to the command line interface of the devices to manage them.

In this lab we will learn how to use the SmartRack system to manage the Cisco devices in the lab, via console, from your computer at home. We will also explore how network devices in the same kit interconnect under the existing wiring scheme.

Required Resources

- Personal Computer
- Internet Connection
- Swinburne VPN
- Terminal application (e.g. Putty)

Part 1: The SmartRack Web Interface

In Part 1, you will learn how to access the SmartRack Web Interface and book a networking kit.

Step 1: Connect to Swinburne VPN

Note: If you are attending your first lab session on-campus, you will not need to connect the VPN to complete Lab SU-1a. However, you are advised to complete the installation and configuration process.

The SmartRack system is only accessible from within the Swinburne network. This means that in order to remotely access the Cisco Lab equipment, you must first install and configure the Swinburne VPN.

The VPN software and associated support is provided by Swinburne's IT staff, teaching staff cannot provide direct support. To download and install the VPN software go to: <https://vpn.swin.edu.au/>

Once you've installed the software, you can establish your Swinburne VPN connection using the following details:

VPN Server Name: vpn.swin.edu.au

Username: your SIMS username (Student ID)

Password: your SIMS password.

If you are having issues installing the VPN and/or connecting to the VPN, you can contact IT for support at servicedesk@swin.edu.au or on tel:+61392145000

Step 2: Access SmartRack Web Interface

If you are on-campus, or online and connected to the VPN, you have access to internal Swinburne network resources such as the SmartRack system. To access the SmartRack Web Interface go to:

<http://smartrack.ict.swin.edu.au/>

Note that if you are working remotely and have not successfully connected to the VPN, you will still be able to access the SmartRack home page, however, it will display a warning message letting you know that your VPN is not connected (see below) and you will not be able to go beyond this home page.



SWINBURNE UNIVERSITY OF TECHNOLOGY

Smart Rack Solution
Faculty of Science, Engineering & Technology

- › ATC328 CCNP
- › ATC329 CCNA & CCNP
- › ATC330 CCNA
- › EN310 (Network Security)

Smart Rack Solution

Please select the Smart Rack for the room you are in.

Warning: VPN connection not detected!

In order to access netlab from home a VPN connection to Swinburne will be required.

Please see the [IT how to guide](#) on how to setup and connect to the Swinburne VPN

Step 3: Go to Your Allocated Lab Room

Once you are on the the SmartRack web interface, access your allocated lab room by clicking on the room name in the left-hand side menu on the SmartRack home page. You can also use the direct links below:

ATC328: <http://ictencsvr2.ict.swin.edu.au/>

ATC329: <http://ictencsvr10.ict.swin.edu.au/>

You can use ATC330 for practicing outside your allocated lab time, however, be aware that the networking kits in this room have different model devices, with slightly different configuration commands.

ACT330: <http://ictencsvr12.ict.swin.edu.au/>

Step 4: Book an Available Networking Kit

Once you are in your allocated lab room, click on the **Show Kits** option in the left-hand side menu. This will display a list of all networking kits in the room. To book a kit, click on the book icon to the right.

SWINBURNE
UNIVERSITY OF TECHNOLOGY

ATC328 Smart Rack Solution for CCNP

Faculty of Science, Engineering & Technology

> Server Selection
 > My Bookings
> Show Kits
 > Show Devices
 > Share Booking
 > Release Booking

Kit Selection for ncerecedacastellani

Name	Type	Current User	Tools
All Devices			📖
Enclosure 1 (Black) Kit 5 (Yellow)	CCNP		📖
Enclosure 1 (Black) Kit 4 (Green)	CCNP	ncerecedacastellani	📖
Enclosure 1 (Black) Kit 3 (Orange)	CCNP		📖
Enclosure 1 (Black) Kit 2 (Purple)	CCNP		📖

If you are **on-campus** you must book the kit specified on the desk label. You can also refer to the map below:

If you are attending your lab **online**, you can book one of the following kits:

- Black/Yellow
- Red/Orange
- Green/Yellow
- Black/Orange
- Blue/Orange
- Yellow/Yellow
- Red/Yellow
- Blue/Yellow
- Yellow/Orange

Make sure you set the booking period for the duration of the lab session (3 hours). If you fail to do this, a default booking duration of 1 hour will apply. When the booking expires, the devices will automatically power off and unsaved configuration settings will be lost.

Make booking for Enclosure 1 (Black) Kit 3 (Orange)

[[Select All](#) | [Unselect All](#)]

Device	Enclosure 1 (Black) Kit 3 (Orange) Router 4 Cisco ISR 4321	✓
Device	Enclosure 1 (Black) Kit 3 (Orange) Router 3 Cisco ISR 4321	✓
Device	Enclosure 1 (Black) Kit 3 (Orange) Router 2 Cisco ISR 4321	✓
Device	Enclosure 1 (Black) Kit 3 (Orange) Router 1 Cisco ISR 4321	✓
Device	Enclosure 1 (Black) Kit 3 (Orange) Switch 4 Cisco Catalyst 3650	✓
Device	Enclosure 1 (Black) Kit 3 (Orange) Switch 3 Cisco Catalyst 3650	✓
Device	Enclosure 1 (Black) Kit 3 (Orange) Switch 2 Cisco Catalyst 2960 Plus	✓
Device	Enclosure 1 (Black) Kit 3 (Orange) Switch 1 Cisco Catalyst 2960 Plus	✓
User	ncerecedacastellani	
Start time	Now ▼	
Duration	Up to 3 hours ▼	
<input type="button" value="Make Booking"/>		

Part 2: Connect to the Network Devices

In Part 2, you will learn how to access the console of the networking devices.

Step 1: Power On the Network Devices

Once you've booked a kit, the next step is to power on the devices you will be using during your lab session. On this practice we are going to use all the network devices shown in the TNE10006/TNE60006 Lab Infrastructure and Wiring Scheme diagram above:

- Switch 1
- Switch 3
- Switch 4
- Router 1

To power on the devices, first click the **My Bookings** option in the left-hand side menu; this will display the list of devices in your booked kit. Click on the **power button** in the right-most column to power on a device. Do this for all the devices you will be using during your practice, making sure you leave all other devices off.

SWINBURNE

UNIVERSITY OF TECHNOLOGY

ATC328 Smart Rack Solution for CCNP

Faculty of Science, Engineering & Technology

Server Selection

My Bookings

Show Kits

Show Devices

Share Booking

Release Booking

Upload Commands

Kit Configurations

Dashboard

Device Selection for ncerecedacastellani

Name	Device	Current User	VAN Port	Power	Network	Tools
Enclosure 1 (Black) Kit 4 (Green) Router 4	Cisco ISR 4321	ncerecedacastellani until 2020-07-26 23:30	Gi0/0/0	Off	Connected	
Enclosure 1 (Black) Kit 4 (Green) Router 3	Cisco ISR 4321	ncerecedacastellani until 2020-07-26 23:30	Gi0/0/0	Off	Connected	
Enclosure 1 (Black) Kit 4 (Green) Router 2	Cisco ISR 4321	ncerecedacastellani until 2020-07-26 23:30	Gi0/0/0	Off	Connected	
Enclosure 1 (Black) Kit 4 (Green) Router 1	Cisco ISR 4321	ncerecedacastellani until 2020-07-26 23:30	Gi0/0/0	Off	Connected	
Enclosure 1 (Black) Kit 4 (Green) Switch 4	Cisco Catalyst 3650	ncerecedacastellani until 2020-07-26 23:30	Gi1/0/24	Off	Connected	
Enclosure 1 (Black) Kit 4 (Green) Switch 3	Cisco Catalyst 3650	ncerecedacastellani until 2020-07-26 23:30	Gi1/0/24	Off	Connected	
Enclosure 1 (Black) Kit 4 (Green) Switch 2	Cisco Catalyst 2960 Plus	ncerecedacastellani until 2020-07-26 23:30	Fa0/24	Off	Connected	
Enclosure 1 (Black) Kit 4 (Green) Switch 1	Cisco Catalyst 2960 Plus	ncerecedacastellani until 2020-07-26 23:30	Fa0/24	Off	Connected	

After a few seconds, the status under the Power column will change to **On**. Allow another 3 to 5 minutes for the devices to finish the booting process before you attempt to connect to the devices via console.

Note: the remaining Steps in Part 3 are only to be followed when accessing the lab environment from outside the Swinburne network. During your on-campus sessions you will connect to the console of the devices by clicking the **native console button** (the one immediately to the left of the power button).

Step 2: Download and Install Putty

Note: only complete this step if working remotely from your personal computer. Putty is already installed in the PCs you will use when on-campus.

To manage a lab network device via console, we first need to establish an **SSH connection** to the SmartRack server in the enclosure where the device is physically situated. This server will then bridge the SSH connection to the console port of the device, allowing us to manage it via command line interface.

To establish this type of remote connections, we need to use **terminal emulation software**. Terminal emulators allow you to use your local computer's keyboard and display as input/output devices for the command line interface of an external system.

MAC and Linux operating systems include terminal applications you can use to establish an SSH connection to the SmartRack server. However, if you are using a Windows system, you will need to download and install a third-party terminal application.

Putty is a free terminal application you can download at:

<https://www.chiark.greenend.org.uk/~sgtatham/putty/latest.html>

Step 3: Retrieve SSH connection details for Switch 1

In order to connect to Switch 1 via console, you will need to establish an SSH connection to the specific SmartRack server physically connected to Switch 1, using the specific username and password details that will bridge your connection to Switch 1's console port. Therefore, to establish this connection using your terminal application, you will need to know the following details:

- **Hostname** of the server
- **Username** linked to Switch 1's console
- **Password**

To retrieve these details from the SmartRack Web Interface, go to **My Bookings** and click on the **key icon** next to the device you wish to access.

ATC328 Smart Rack Solution for CCNP
Faculty of Science, Engineering & Technology

Server Selection

My Bookings

Show Kits

Show Devices

Share Booking

Release Booking

Upload Commands

Kit Configurations

Dashboard

Faults

Testing

Timetable

Logout

Device Selection for ncerecedacastellani

Name	Device	Current User	VAN Port	Power	Network	Tools
Enclosure 1 (Black) Kit 5 (Yellow) Router 4	Cisco ISR 4321	ncerecedacastellani until 2020-12-29 20:30	port40	On	Connected	Key icon (highlighted)
Enclosure 1 (Black) Kit 5 (Yellow) Router 3	Cisco ISR 4321	ncerecedacastellani until 2020-12-29 20:30	port40	On	Connected	
Enclosure 1 (Black) Kit 5 (Yellow) Router 2	Cisco ISR 4321	ncerecedacastellani until 2020-12-29 20:30	port40	On	Connected	
Enclosure 1 (Black) Kit 5 (Yellow) Router 1	Cisco ISR 4321	ncerecedacastellani until 2020-12-29 20:30	port40	On	Connected	
Enclosure 1 (Black) Kit 5 (Yellow) Switch 4	Cisco Catalyst 3650	ncerecedacastellani until 2020-12-29 20:30	port40	On	Connected	
Enclosure 1 (Black) Kit 5 (Yellow) Switch 3	Cisco Catalyst 3650	ncerecedacastellani until 2020-12-29 20:30	port40	On	Connected	
Enclosure 1 (Black) Kit 5 (Yellow) Switch 2	Cisco Catalyst 2960 Plus	ncerecedacastellani until 2020-12-29 20:30	port40	On	Connected	
Enclosure 1 (Black) Kit 5 (Yellow) Switch 1	Cisco Catalyst 2960 Plus	ncerecedacastellani until 2020-12-29 20:30	port40	On	Connected	

[Select All | Unselect All]

Turn Selected Devices On Turn Selected Devices Off

No future bookings for ncerecedacastellani

This will display two fields:

- The first field contains the username and hostname for the connection
In the example: port40@ictencsvr1.ict.swin.edu.au
Username: port40
Hostname: ictencsvr1.ict.swin.edu.au
- The second field contains the password for the connection.
In the example:
Password: Zuj7NhFvXz

If you are having trouble retrieving the SSH connection details from the SmartRack Web Interface, ask your lab instructor for help. Alternatively, you can go to the **Manual Console** tab of the **Remote Access information page in Canvas**. In there you will find step-by-step instructions and a short video on how to retrieve SSH connection details from the SmartRack Web Interface. The direct link to this information page:

<https://swinburne.instructure.com/courses/35148/pages/remote-lab-access>

Step 4: Connect to Switch 1

If working **on-campus**, click on the **native console** icon next to the right of the device you wish to connect to establish a console session; in this case, Switch 1. This will automatically open a Putty window with an SSH connection to Switch 1.


ATC328 Smart Rack Solution for CCNP
 Faculty of Science, Engineering & Technology

- > Server Selection
- > My Bookings
- > Show Kits
- > Show Devices
- > Share Booking
- > Release Booking
- > Upload Commands
- > Kit Configurations
- > Dashboard

Device Selection for ncerecedacastellani							
Name	Device	Current User	VAN Port	Power	Network	Tools	
Enclosure 1 (Black) Kit 4 (Green) Router 4	Cisco ISR 4321	ncerecedacastellani until 2020-07-26 23:30	Gi0/0/0	Off	Connected		
Enclosure 1 (Black) Kit 4 (Green) Router 3	Cisco ISR 4321	ncerecedacastellani until 2020-07-26 23:30	Gi0/0/0	Off	Connected		
Enclosure 1 (Black) Kit 4 (Green) Router 2	Cisco ISR 4321	ncerecedacastellani until 2020-07-26 23:30	Gi0/0/0	Off	Connected		
Enclosure 1 (Black) Kit 4 (Green) Router 1	Cisco ISR 4321	ncerecedacastellani until 2020-07-26 23:30	Gi0/0/0	Off	Connected		
Enclosure 1 (Black) Kit 4 (Green) Switch 4	Cisco Catalyst 3650	ncerecedacastellani until 2020-07-26 23:30	Gi1/0/24	Off	Connected		
Enclosure 1 (Black) Kit 4 (Green) Switch 3	Cisco Catalyst 3650	ncerecedacastellani until 2020-07-26 23:30	Gi1/0/24	Off	Connected		
Enclosure 1 (Black) Kit 4 (Green) Switch 2	Cisco Catalyst 2960 Plus	ncerecedacastellani until 2020-07-26 23:30	Fa0/24	Off	Connected		
Enclosure 1 (Black) Kit 4 (Green) Switch 1	Cisco Catalyst 2960 Plus	ncerecedacastellani until 2020-07-26 23:30	Fa0/24	Off	Connected		

If working **online** via remote access, open a terminal application window and initiate an SSH connection using Switch 1 connection details retrieved in Step 3.

If you are using Putty, the initial window will look like this:

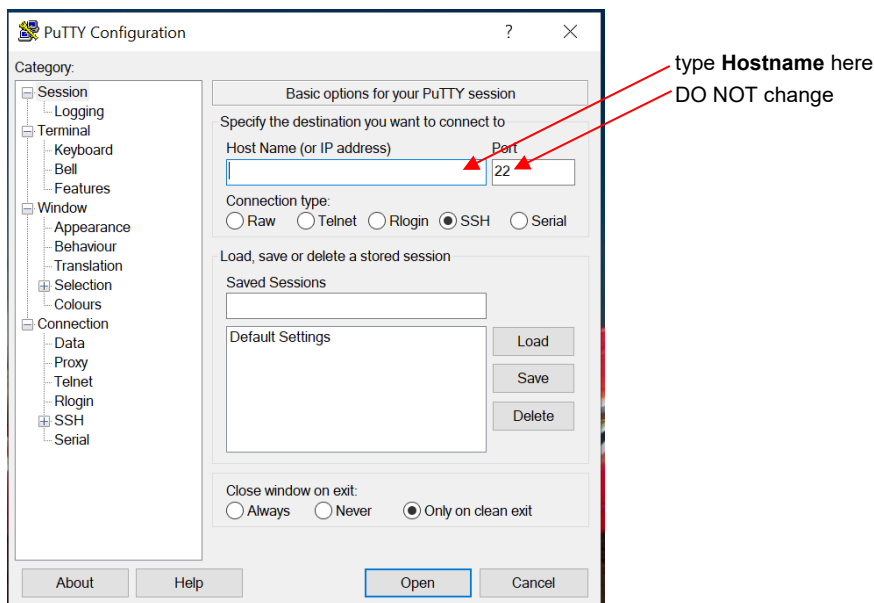

Type the **Hostname** for Switch 1 and make sure you **DO NOT** change the port number. This port number is **NOT** the related to the username for the connection (22 is the standard SSH application port). Click **Open**, and a second window will open prompting you for the **Username** and **Password** to establish the connection. Use the username and password details retrieved in Step 3.

If you are using a MAC system; open a new terminal window and type the **ssh command** with Switch 1 Username and Hostname details (see the example below). Press Enter and type in the Password when prompted.

Example: **Username:** port17, **Hostname:** ictencsvr1.ict.swin.edu.au



```
kcereceda — Enclosure 1 (Black) Kit 3 (Orange) Switch 1 — ssh port17@ictencsvr1.ict.swin.edu.au — 98x30
Last login: Mon Jul 27 01:11:39 on ttys000

The default interactive shell is now zsh.
To update your account to use zsh, please run `chsh -s /bin/zsh`.
For more details, please visit https://support.apple.com/kb/HT208050.
[Karinas-MacBook-Pro-2:~ kcereceda$ ssh port17@ictencsvr1.ict.swin.edu.au
port17@ictencsvr1.ict.swin.edu.au's password:
Console Connecting to port 17 - Enclosure 1 (Black) Kit 3 (Orange) Switch 1
Escape character is '^]'.

Console> link is up
```

Once the console link is up, hit Enter until you see the switch's command line prompt: Switch 1>

Note: when prompted "Would you like to enter the initial configuration dialog?" answer "no" and then press Enter to confirm.

Step 5: Connect to Switch 3, Switch 4 and Router 1

Repeat Steps 3 and 4 to connect to Switch 3, Switch 4 and Router 1.

Part 3: Explore the Wiring Scheme

In part 4, you will explore how devices interconnect to each other under the generic Wiring Scheme

Step 1: Display the Interface Status on Switch 1

After you've successfully connected to the network devices via console, you have access to use Cisco command line interface commands to display status information, display and change configuration settings, reload the devices, etc.

One of the first commands you will learn is the **show ip interface brief** command. This command displays the physical and logical status of the network interfaces on the devices. We will discuss this command in more details in a later lab session, however, we will use it in this exercise to validate the interconnections shown in the **TNE10006/TNE60006 Lab Infrastructure and Wiring Scheme**

Switch 1 is connected to Switch 3 via FastEthernet0/1 and FastEthernet0/2, to Switch 4 via FastEthernet0/3 and FastEthernet0/4. Therefore, since both Switch 3 and Switch 4 are powered on, ports Fa0/1 to Fa0/4 on Switch 1 should be in the **up** status, indicating that they are connected to an active interface on another device.

Use the **show ip interface brief** command to validate ports **Fa0/1 to Fa0/4 status is up** in both the Status and the Protocol columns.

Switch# **show ip interface brief**

Interface	IP-Address	OK?	Method	Status	Protocol
Vlan1	unassigned	YES	unset	up	up
FastEthernet0/1	unassigned	YES	unset	up	up
FastEthernet0/2	unassigned	YES	unset	up	up
FastEthernet0/3	unassigned	YES	unset	up	up
FastEthernet0/4	unassigned	YES	unset	up	up
FastEthernet0/5	unassigned	YES	unset	down	down
FastEthernet0/6	unassigned	YES	unset	down	down
FastEthernet0/7	unassigned	YES	unset	down	down
FastEthernet0/8	unassigned	YES	unset	down	down
FastEthernet0/9	unassigned	YES	unset	down	down

Note: this is a partial output, you will find that Switch 1 has 24 FastEthernet interfaces and 2 GigabitEthernet interfaces.

Step 2: Display the Interface Status on Switch 3 and Switch 4

Use the **show ip interface brief** command on Switch 3 and Switch 4

Which ports are in the **up** status on Switch 3? _____

Which ports are in the **up** status on Switch 4? _____

Are there any ports that you think should be **up** but aren't? _____

Step 3: Display the Interface Status on Router 1

As opposed to switch interfaces, router interfaces are **disabled** by default. When a network interface is disabled, it will show as **administratively down** in the Status column of the show ip interface brief output.

```
Router> show ip interface brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
GigabitEthernet0/0/0	unassigned	YES	unset	administratively down	down
GigabitEthernet0/0/1	unassigned	YES	unset	administratively down	down
Serial0/1/0	unassigned	YES	unset	administratively down	down
Serial0/1/1	unassigned	YES	unset	administratively down	down
GigabitEthernet0	unassigned	YES	unset	administratively down	down

This explains why Switch 3 and Switch 4 interfaces connecting to Router 1 are down: the network interfaces they connect to on Router 1 are not active.

Step 4: Power Off Switch 1

Go to the SmartRack Web Interface and click on the power button power off Switch 1.

Will Switch 3 interfaces status change? And if so, for which interface(s)?

Will Switch 4 interfaces status change? And if so, for which interface(s)?

Use the show ip interface brief command on Switch 3 and Switch 4 to validate your answers.