



Installed Windows Server 2022 Standard (Desktop Experience)



 Screenshot: Windows Server installation

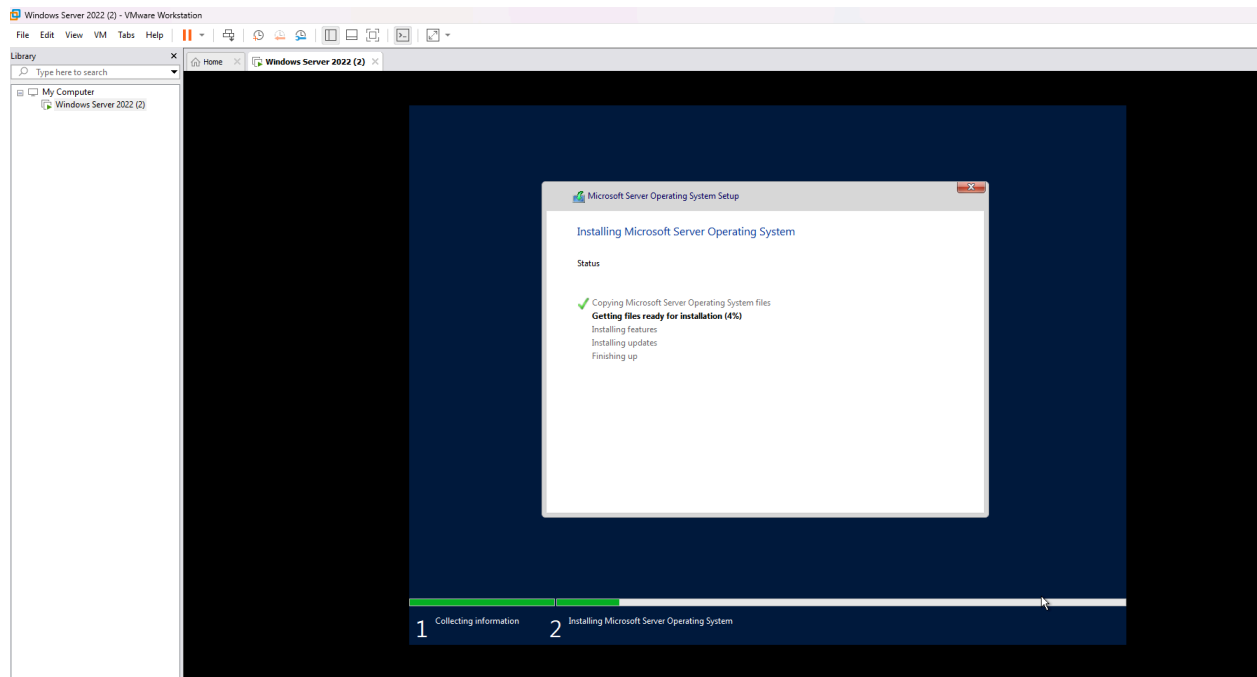

 Screenshot: Static IPv4 and DNS configuration

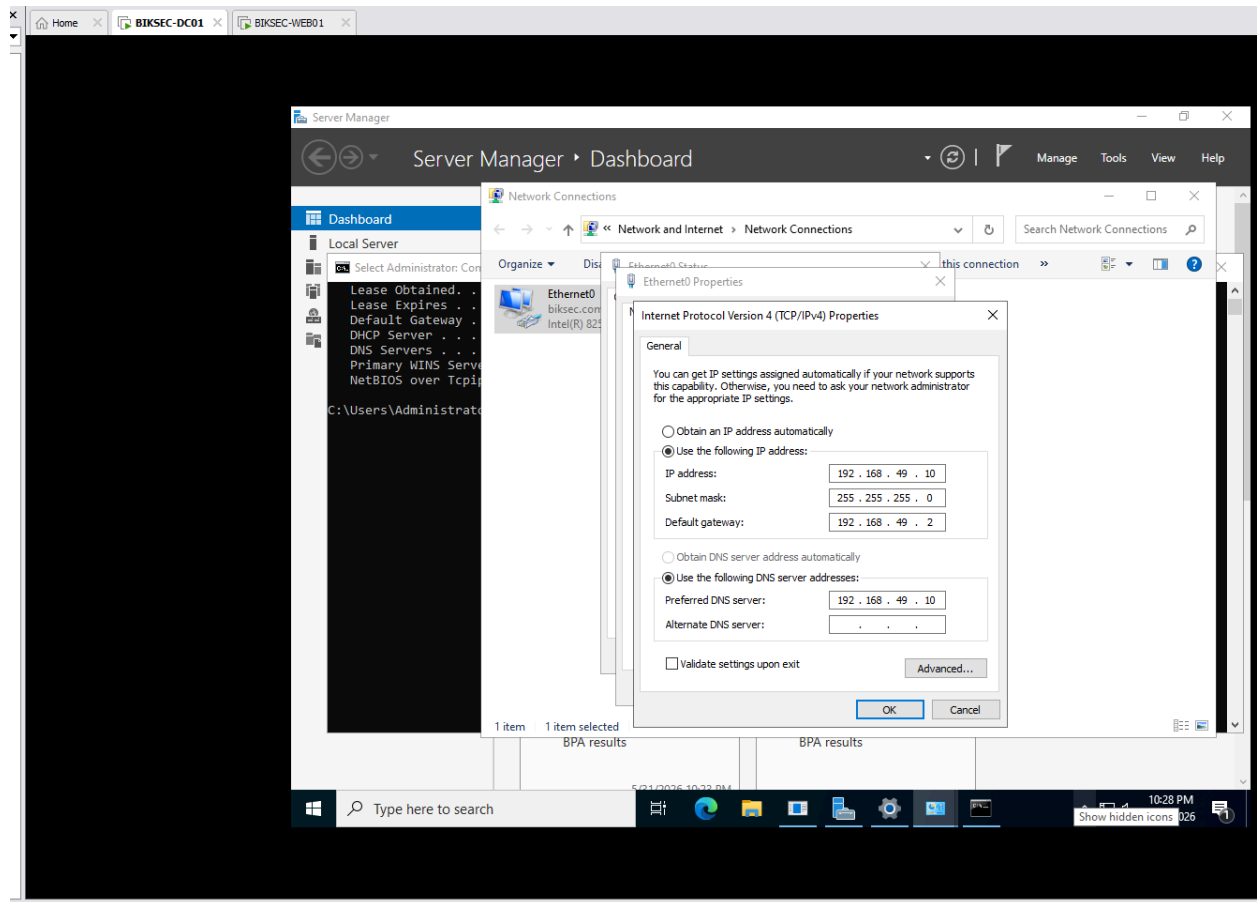


 Screenshot: AD DS feature installation

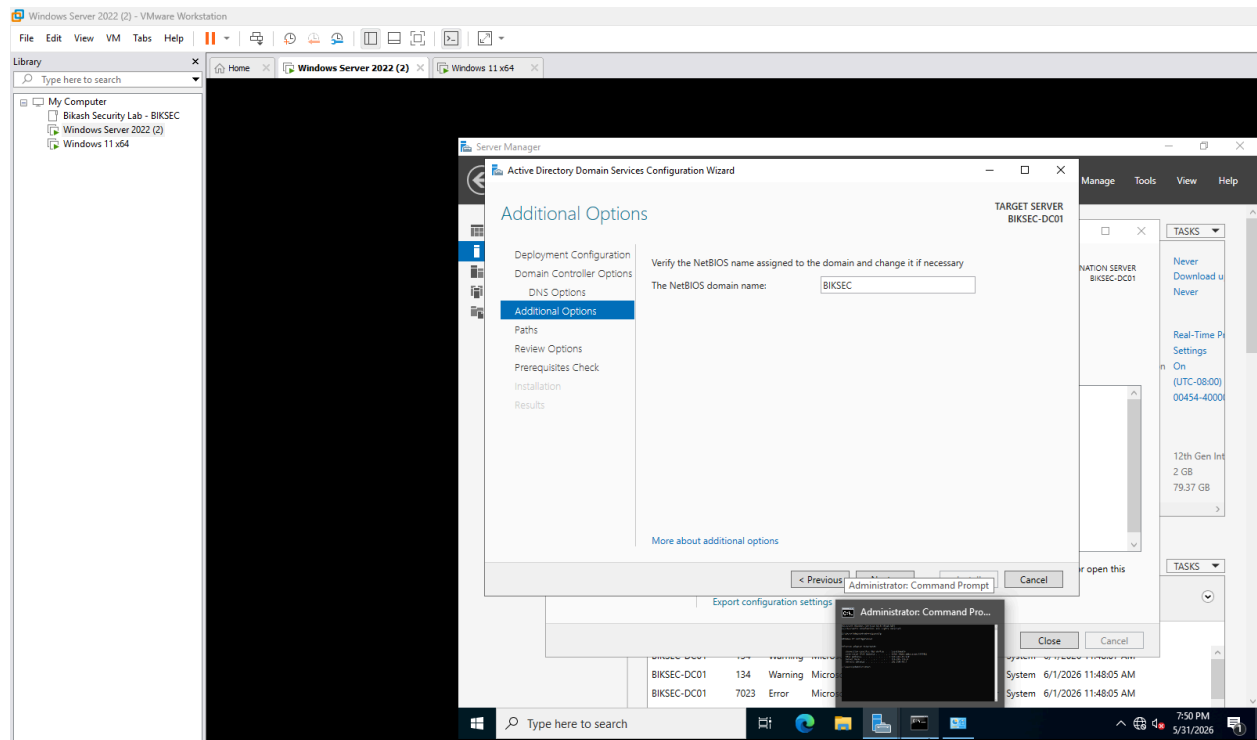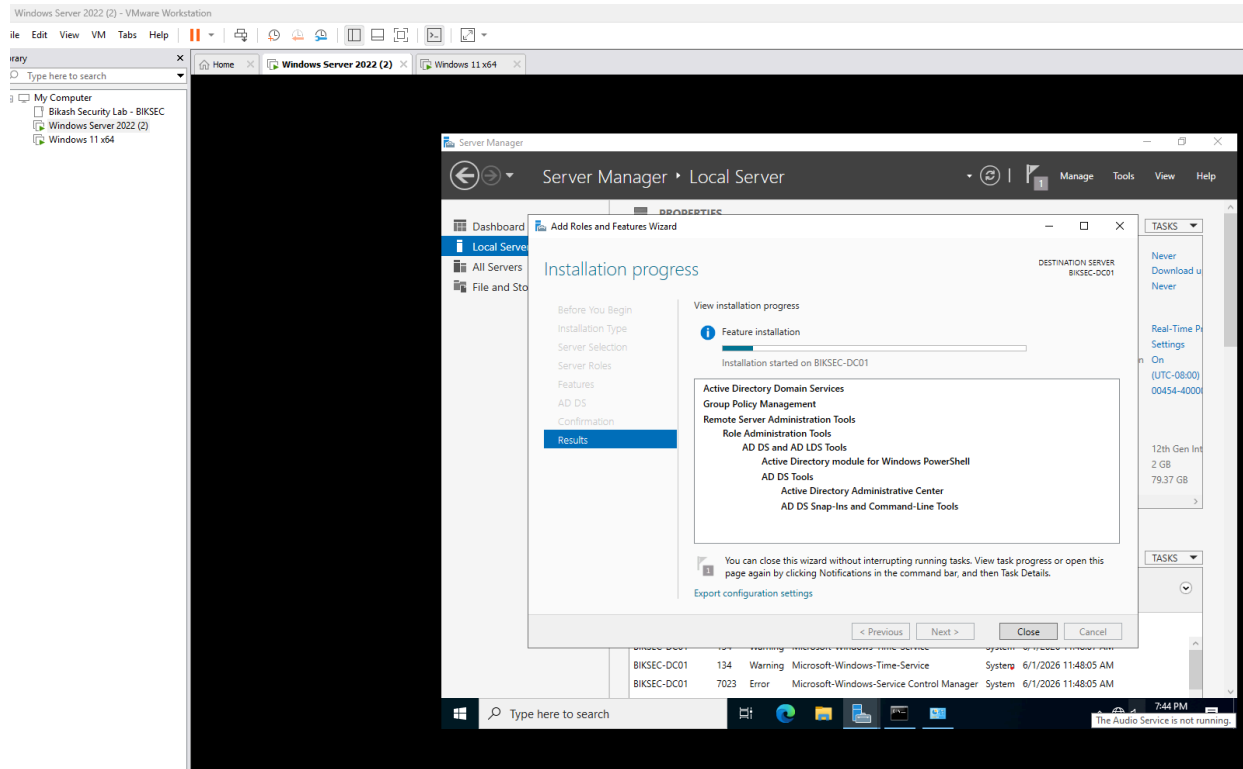

Installation

- Installed Windows Server 2022 Standard (Desktop Experience)

 Screenshot: Web Server installation

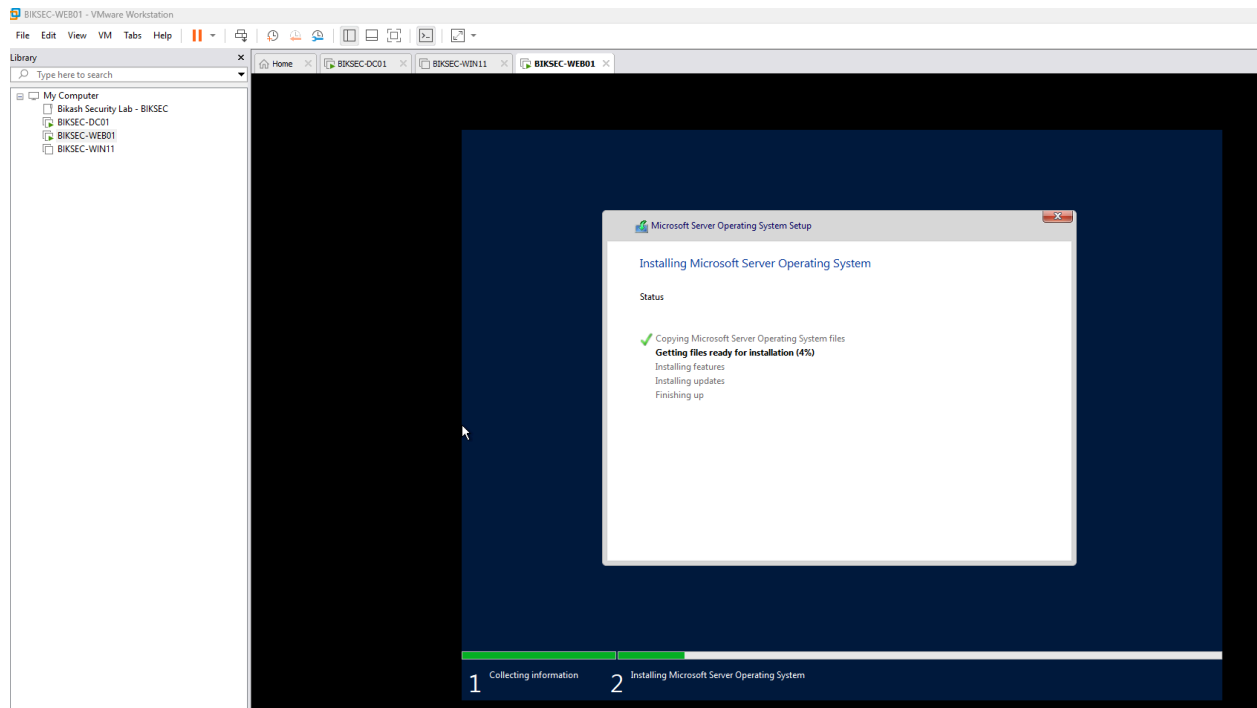

System Rename

- Renamed system to: **BIKSEC-WEB01**



Static IP Configuration

IP Address: 192.168.49.20
Subnet Mask: 255.255.255.0
Default Gateway: 192.168.49.2
DNS Server: 192.168.49.10


Domain Join

- Joined domain: **biksec.com**


 Screenshot: Domain join process

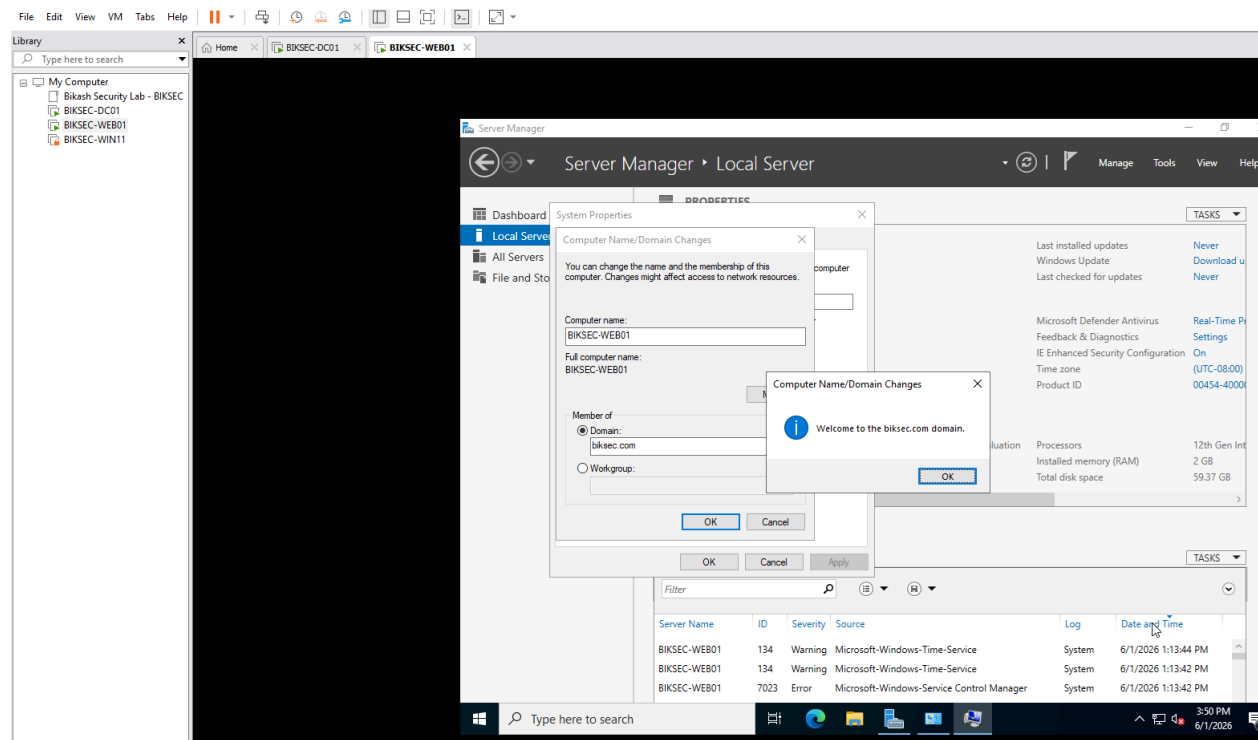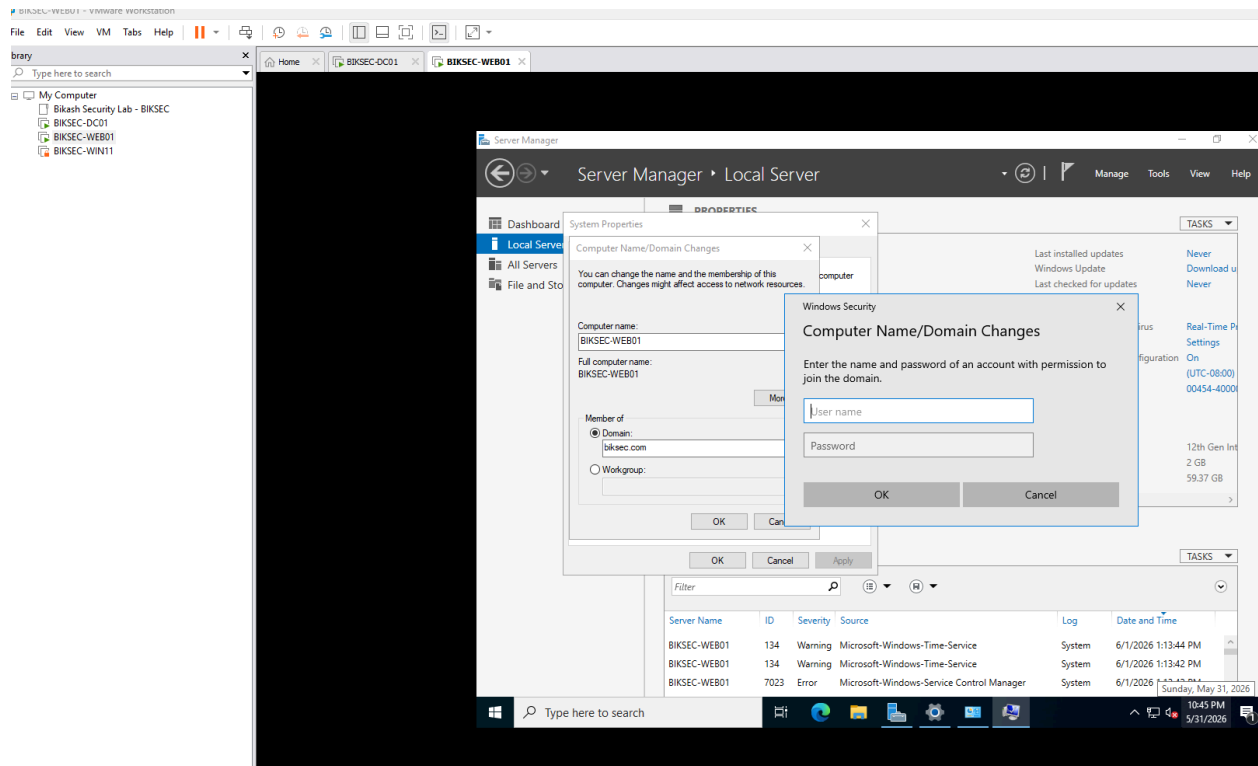


 Screenshot: Windows 11 installation

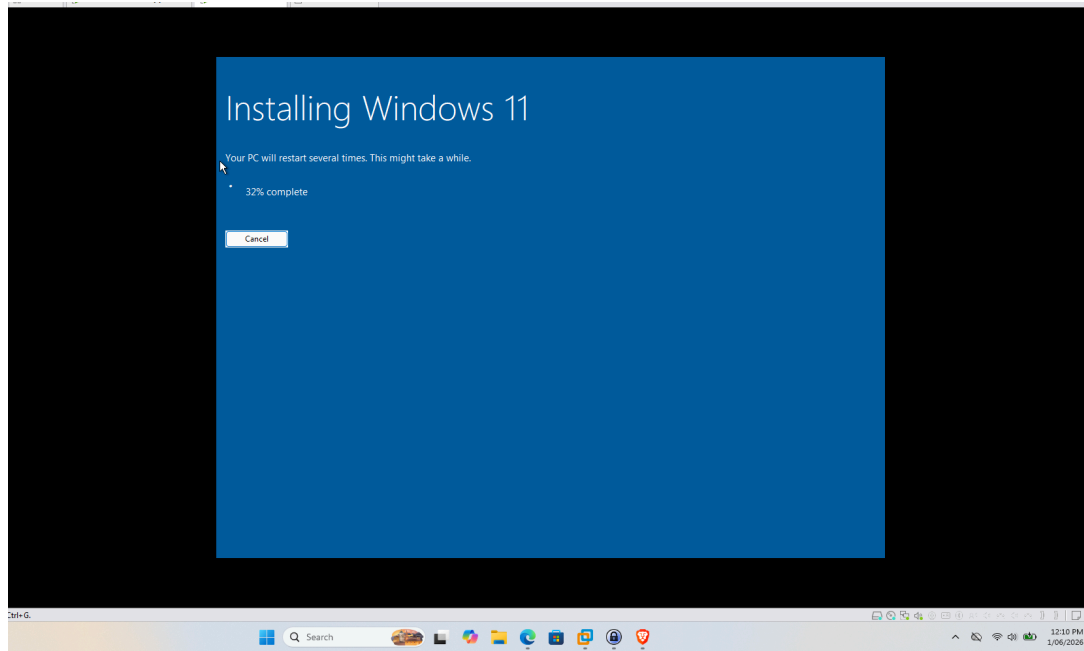


Screenshot: System rename

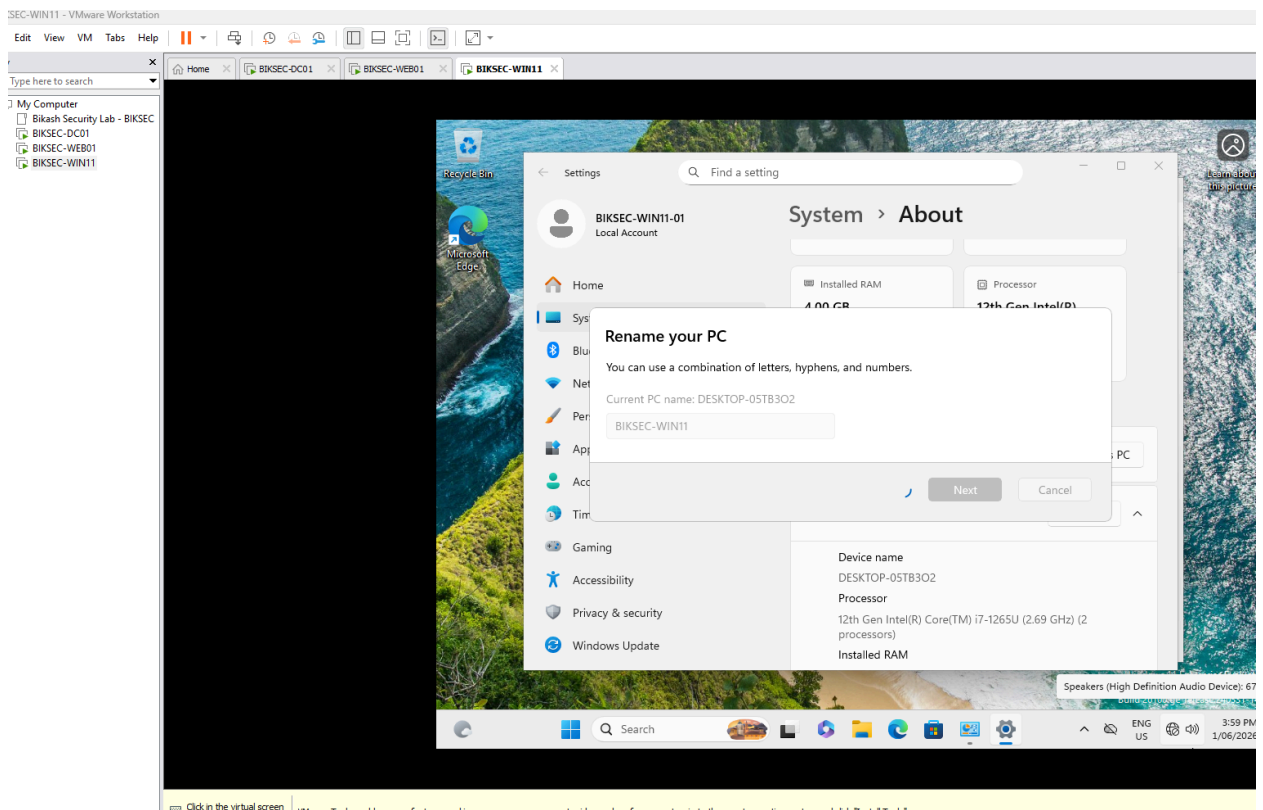


Screenshot: Domain join process (Windows 11)

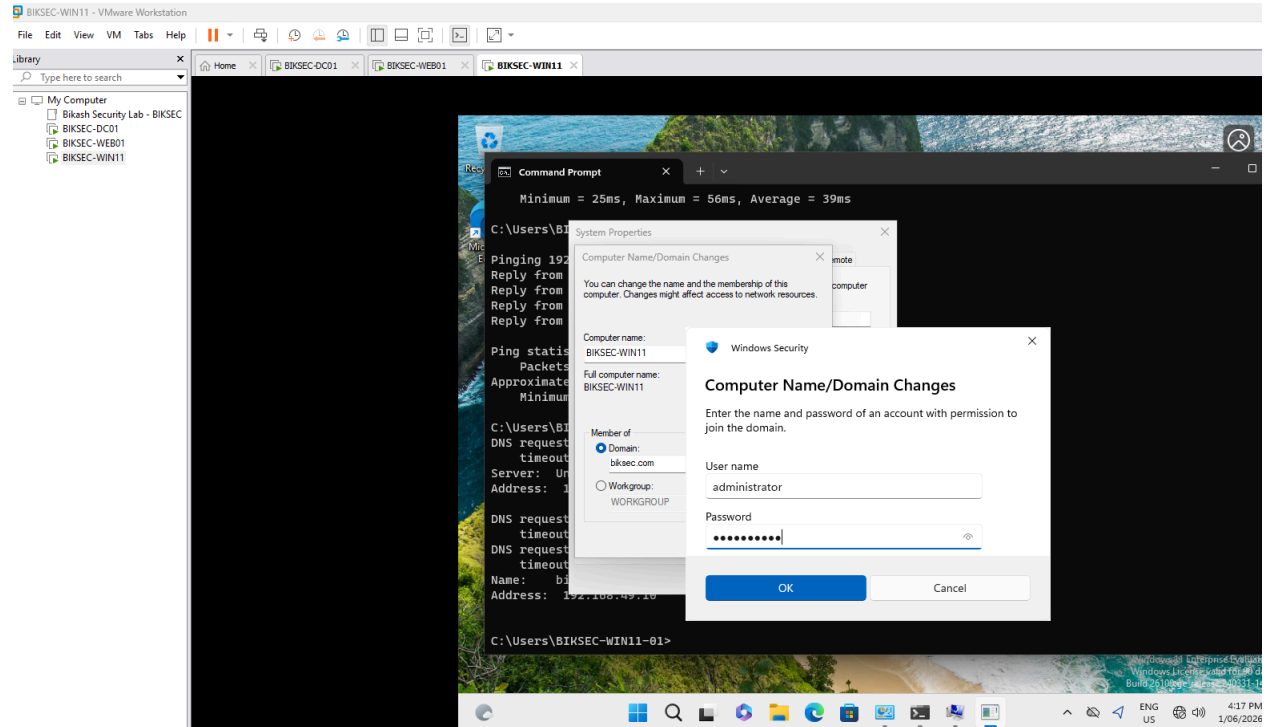

Screenshot: Kali Linux download page

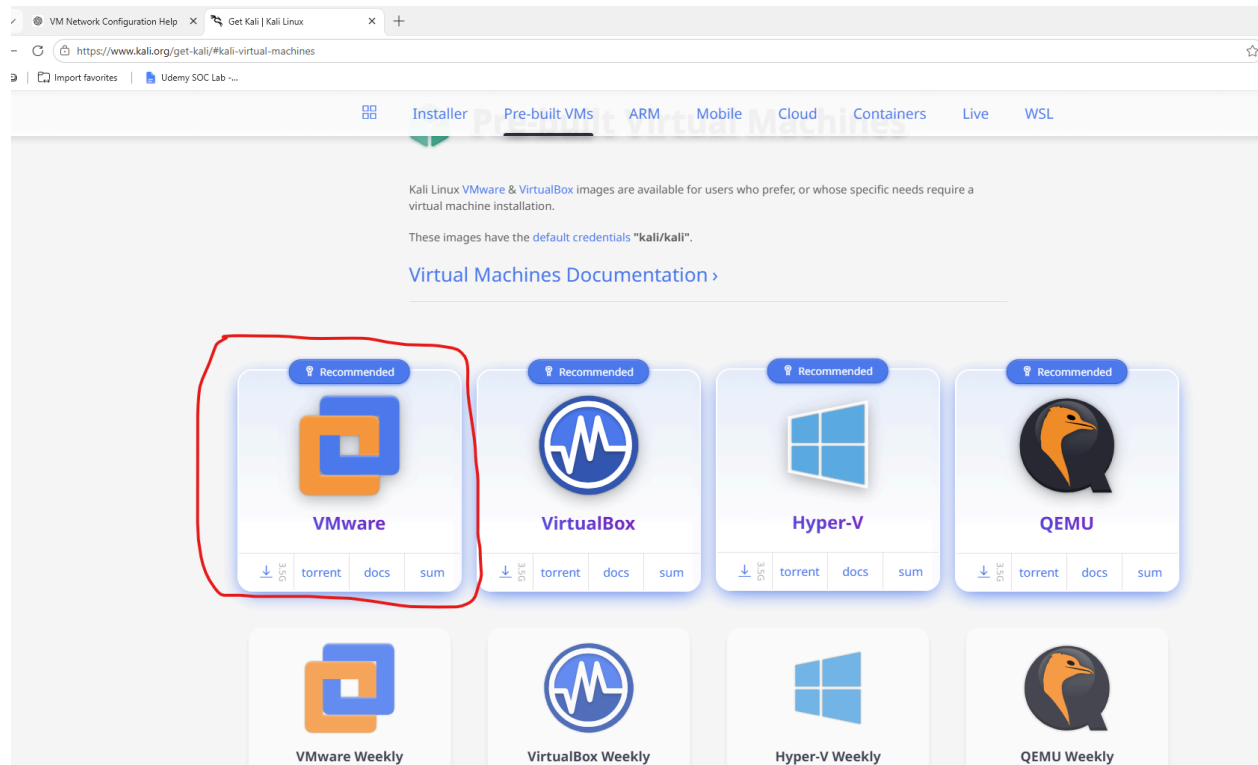

 Screenshot: VM import and login

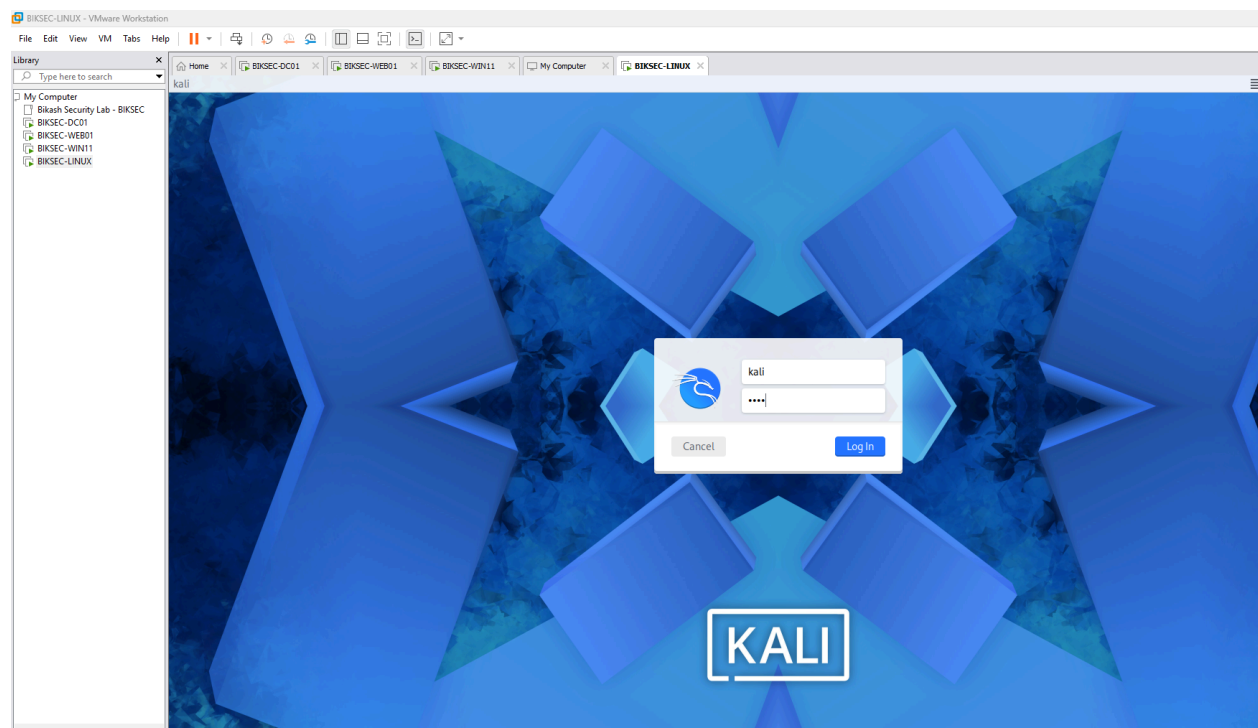

Static IP Configuration (CLI)

nmcli con show

nmcli con mod "Wired connection 1" ipv4.addresses 192.168.49.50/24

nmcli con mod "Wired connection 1" ipv4.gateway 192.168.49.2


nmcli con mod "Wired connection 1" ipv4.dns 192.168.49.10

nmcli con mod "Wired connection 1" ipv4.method manual

nmcli con down "Wired connection 1"

nmcli con up "Wired connection 1"

 Screenshot: Linux IP configuration

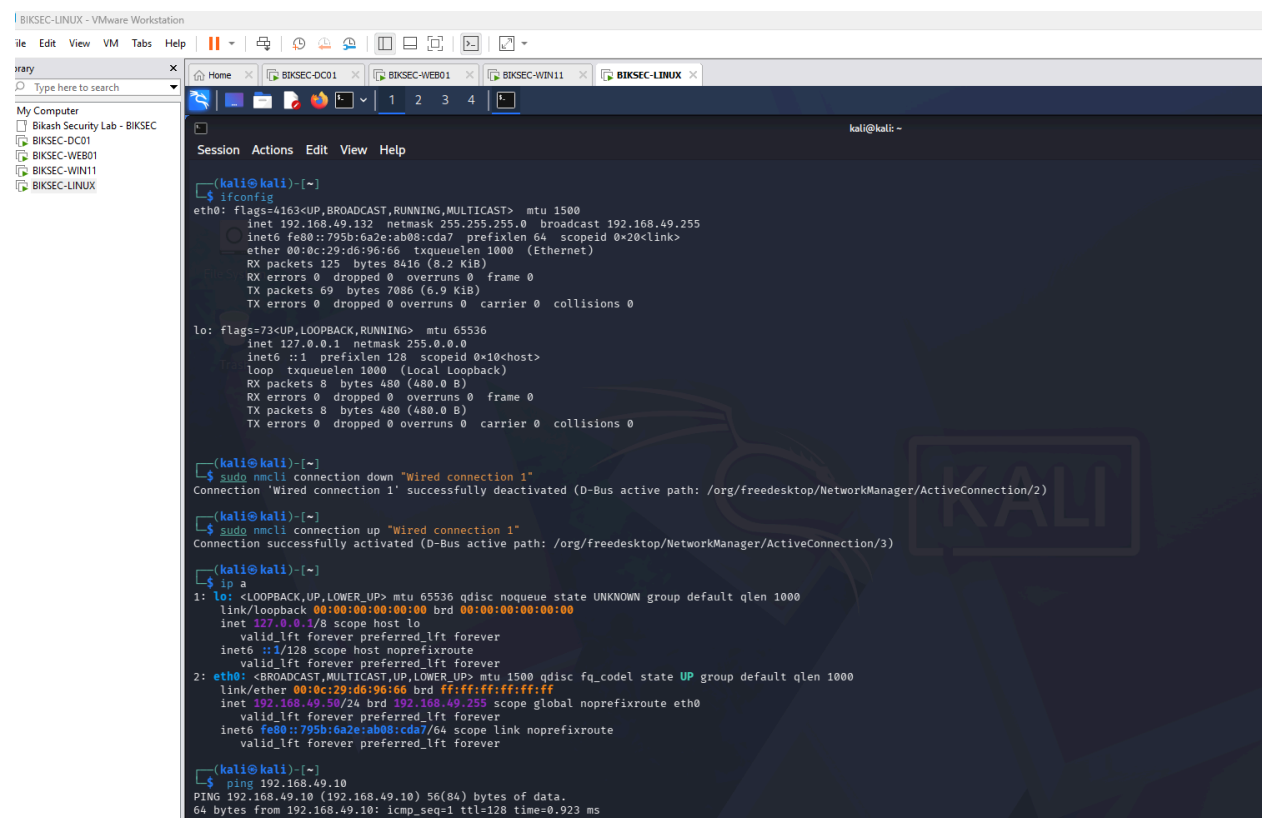

```
BIKSEC-LINUX - VMware Workstation
File Edit View VM Tabs Help
irary
Type here to search
My Computer
  BIKSEC-Security-Lab - BIKSEC
  BIKSEC-DC01
  BIKSEC-WEB01
  BIKSEC-WIN11
  BIKSEC-LINUX

(kali@kali)~$ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.49.132 netmask 255.255.255.0 broadcast 192.168.49.255
    inet6 fe80::795b:6a2e:ab08:cd7 prefixlen 64 scopeid 0<*20<link>
    ether 00:0c:29:d6:96:66 txqueuelen 1000 (Ethernet)
    RX packets 125 bytes 8416 (8.2 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 69 bytes 7086 (6.9 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 8 bytes 480 (480.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 8 bytes 480 (480.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

(kali@kali)~$ sudo nmcli connection down "Wired connection 1"
Connection 'Wired connection 1' successfully deactivated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/2)


(kali@kali)~$ sudo nmcli connection up "Wired connection 1"
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/3)

(kali@kali)~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 00:0c:29:d6:96:66 brd ff:ff:ff:ff:ff:ff
    inet 192.168.49.50/24 brd 192.168.49.255 scope global noprefixroute eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::795b:6a2e:ab08:cd7/64 scope link noprefixroute
        valid_lft forever preferred_lft forever

(kali@kali)~$ ping 192.168.49.10
PING 192.168.49.10 (192.168.49.10) 56(84) bytes of data:
64 bytes from 192.168.49.10: icmp_seq=1 ttl=128 time=0.923 ms
64 bytes from 192.168.49.10: icmp_seq=2 ttl=128 time=0.698 ms
```

Powershell cmd: Enable-NetFirewallRule -Name FPS-ICMP4-ERQ-IN

 Screenshot: Firewall rule modification

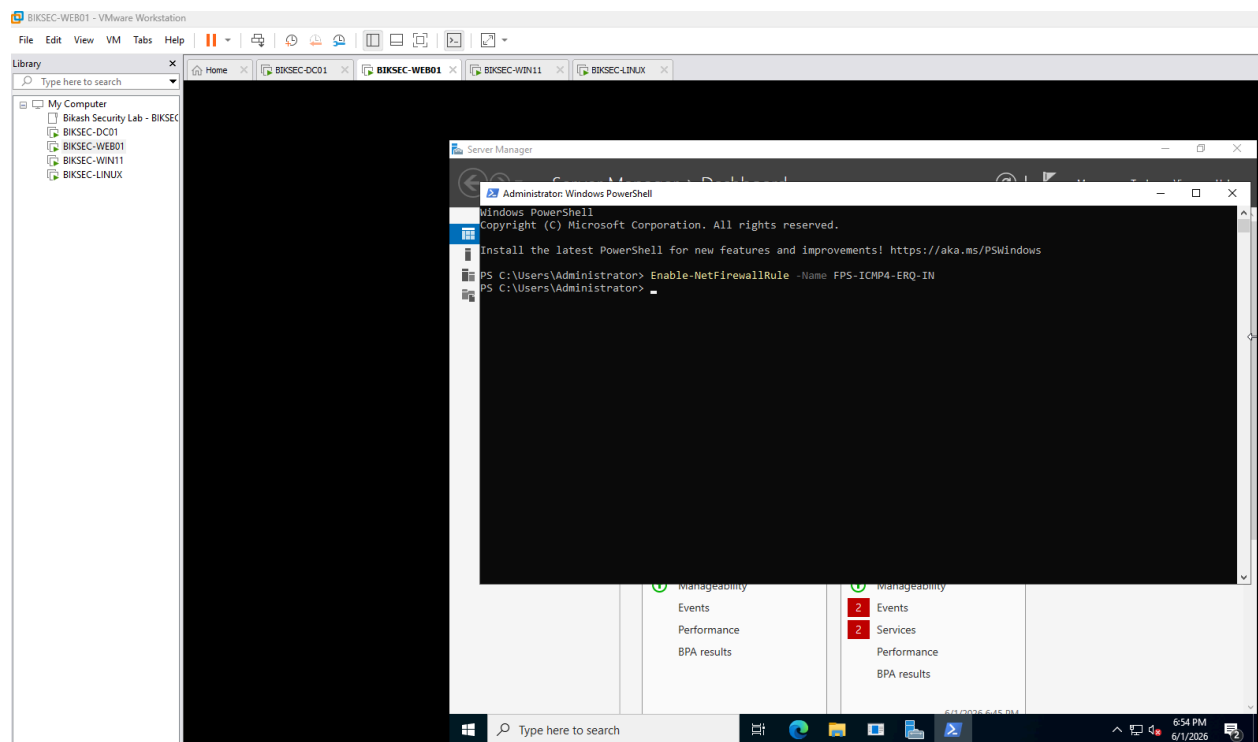

 Screenshot: Successful ping from Kali to Web Server

