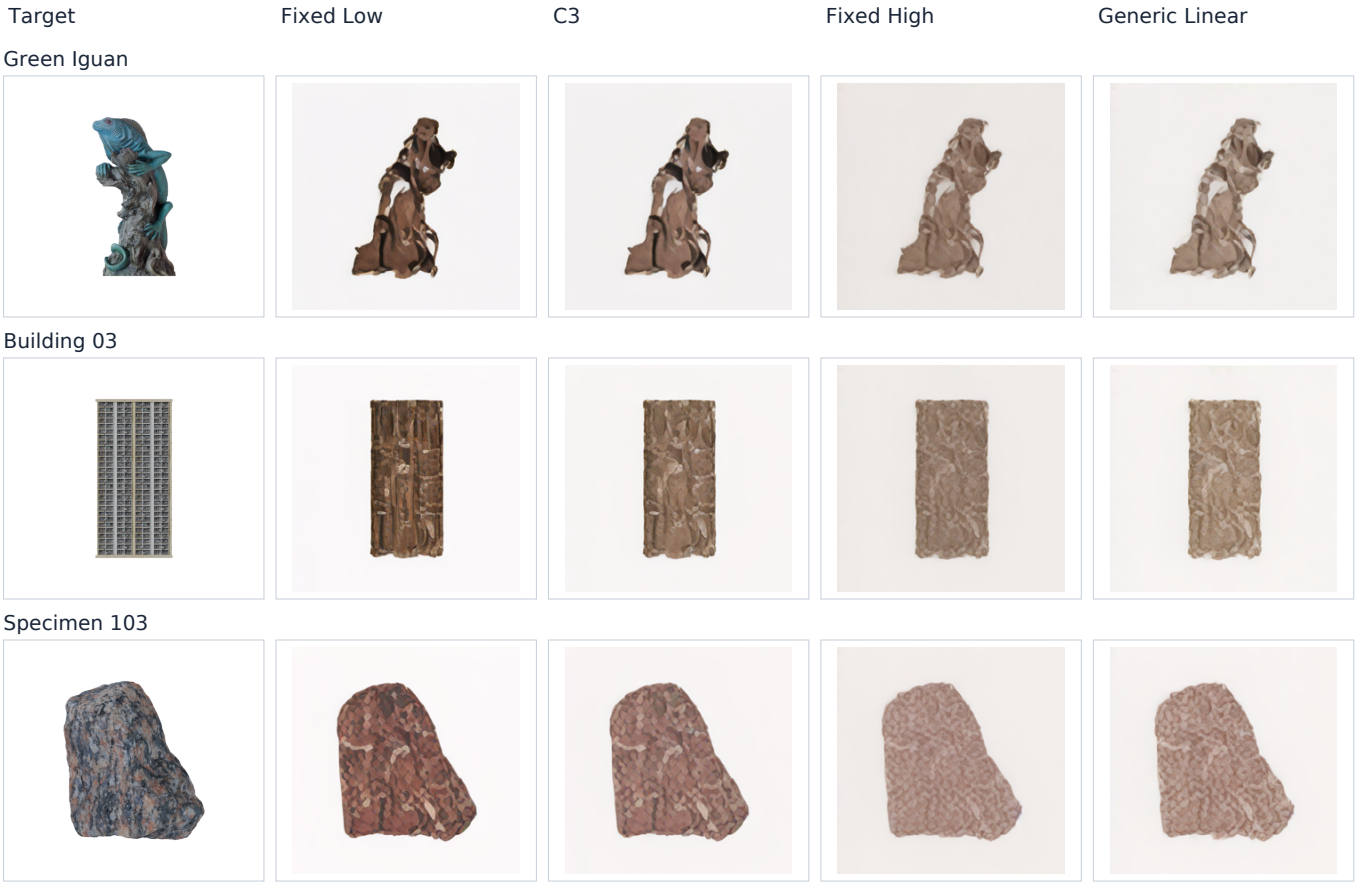


Fig. 2. Fresh C, camera 000. Every row shows Target, Fixed Low, C3, Fixed High and Generic Linear in the same full-frame view. Targets are source RGB conditioning renders, not measured ground-truth albedo. The C3–Fixed Low FG-PSNR differences for Building 03 and Specimen 103 are +2.644 **and** −0.468 **dB, respectively. Source attribution is in Supplementary Section S9.**



Fig. 3. GeoTex Bake10 appearance at held-out camera 004 for Stone. The row shows a GT-256 reference self-bake, Fixed Mean, and Late-high under a shared mesh/UV and within-object crop. The object has the lowest absolute eleven-view FG-LPIPS among seven display-cleared assets, while the Late-high minus Fixed Mean difference is −0.000464 **FG-LPIPS and** +0.001 **dB FG-PSNR. Source images are 512×512 and shown without method-specific color edits. The ten-object effect distribution and full credits are in Supplementary Section S5.**

4.4.3. Protocol and deployment boundaries

Separate twenty-object GSO evaluation. The GSO/MV-Adapter study completes twelve conditions by three seeds on twenty fixed inputs, plus twenty matched GT self-bakes: 740 unique baked meshes and 8,140 unseen-view records. The objects, source meshes, projection cameras, texture resolution and eleven unseen cameras are shared across controls; unseen cameras do not contribute to baking.