

Boardoza LoRa Omni Antenna

Part Number: Omni-5.8dbi



Frequency: 863 – 870 MHz | Gain: 5.8 dBi | Connector: SMA (Female)

NBIoT / LoRa 863-870MHz Wireless Application, M2M / ISM Band Application, Automotive, Geographic Surveying, Sport and Recreation Application.

The Boardoza Omni Antenna, which is designed in the range of 863-870MHz, is widely used as coverage in the ISM band. Provides stable and excellent performance with the pattern of 360° spread.

NBIT / LORA 868-870MHz Wireless applications in M2M / ISM tape applications, smart agricultural applications, home automation, workplace ERP applications, traffic and road information systems are available in wireless communication applications with sensors in traffic and road information systems.

Boardoza Omni antenna is designed in accordance with the definitions of the Euro Region Frequency Plan (EU863-870).

Uplink:

- 868.1 - SF7BW125 to SF12BW125
- 868.3 - SF7BW125 to SF12BW125 and SF7BW250
- 868.5 - SF7BW125 to SF12BW125
- 867.1 - SF7BW125 to SF12BW125
- 867.3 - SF7BW125 to SF12BW125
- 867.5 - SF7BW125 to SF12BW125
- 867.7 - SF7BW125 to SF12BW125
- 867.9 - SF7BW125 to SF12BW125
- 868.8 - FSK

Downlink:

- Uplink channels 1-9 (RX1)
- 869.525 - SF9BW125 (RX2)



Electrical Specifications	
Part Number	Omni-5.8dbi
Frequency	863-870 MHz
Gain	5.8 dBi
VSWR	≤ 1.2
Beam Width (H)	360 °
Beam Width (V)	34 °
Impedance	50 Ω
Mechanical Specifications	
Connector	SMA (Female), IP67
Dimensions	Φ20 x 610mm
Weight	<0.5 kg
Color	Black
Housing material	PVC (UV)
IP Level	Outdoor, IP67
Temperature	-40°C~ +60°C
Installation Method	Wall or Pipe Mount (Galvanized)

Disclaimer: All images are for reference purposes only

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Boardoza holds the right to change the product specifications without notice.


Boardoza LoRa Omni Antenna



Part Number: Omni-5.8dbi

Frequency: 863 – 870 MHz | Gain: 5.8 dBi | Connector: SMA (Female)

Product Pictures

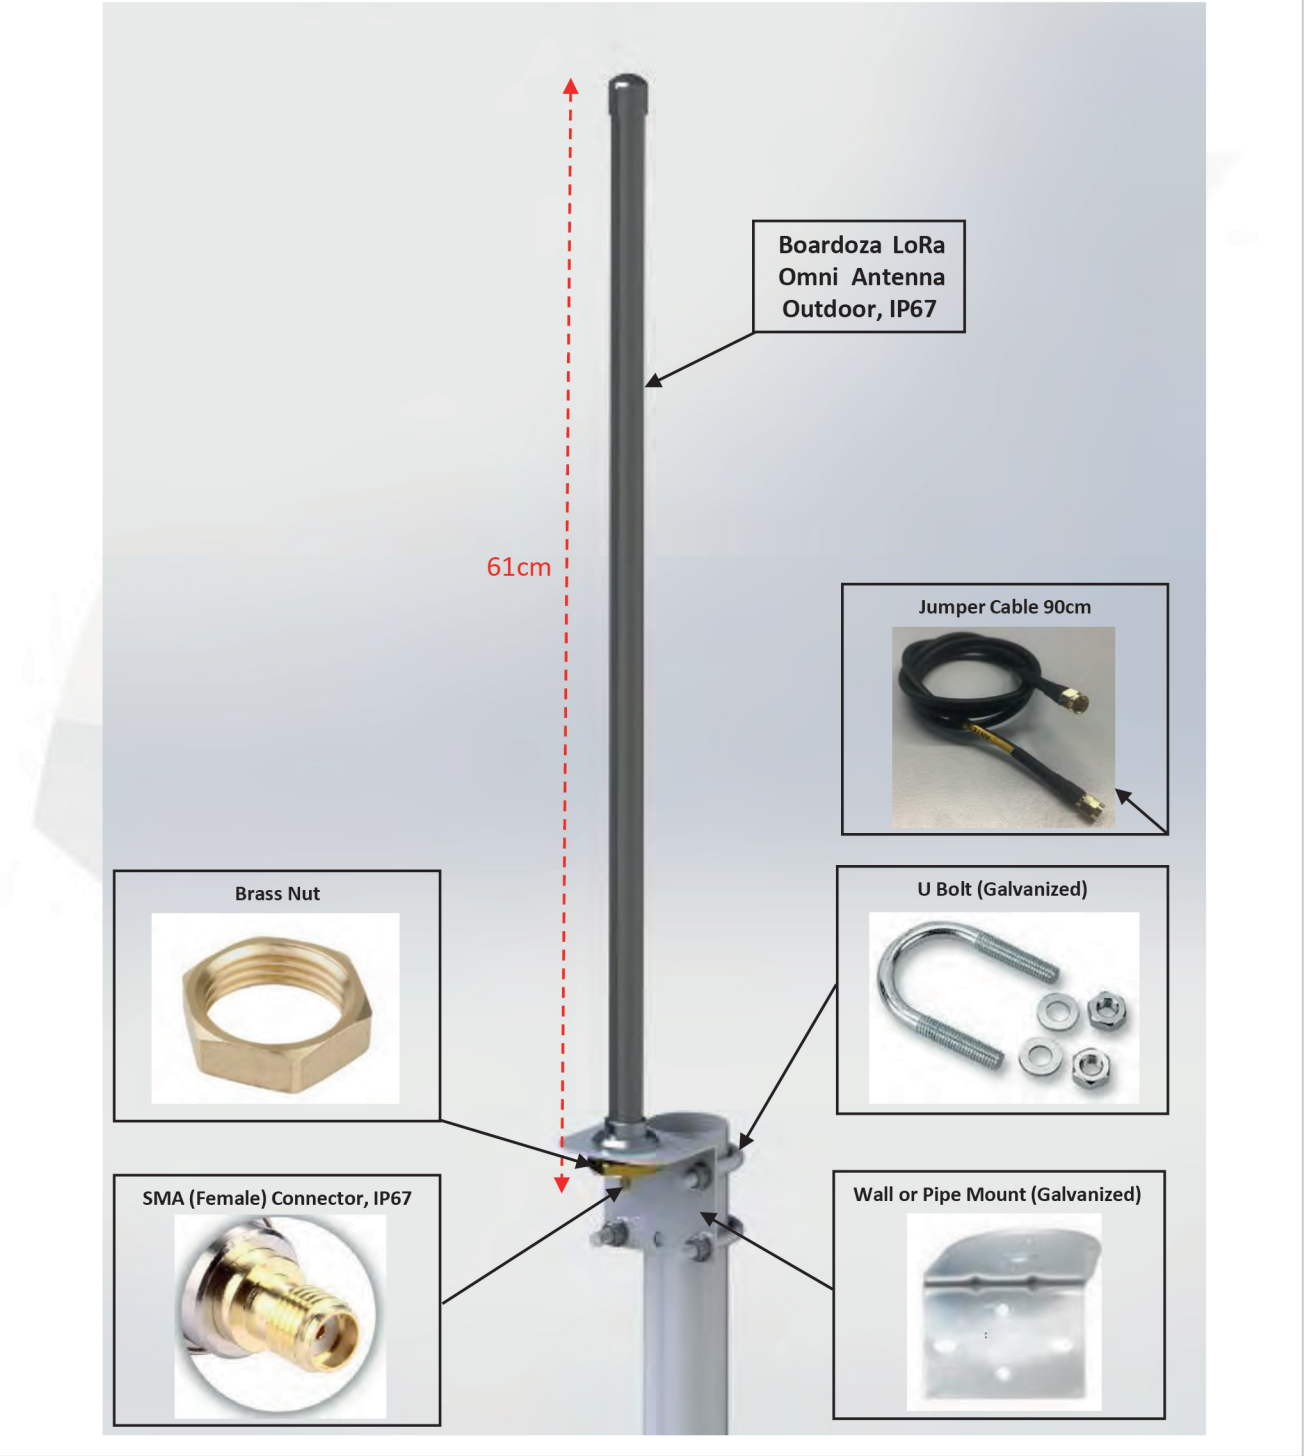

Disclaimer: All images are for reference purposes only

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Boardoza holds the right to change the product specifications without notice.


Boardoza LoRa Omni Antenna

Boardoza


Part Number: Omni-5.8dbi

Frequency: 863 – 870 MHz | Gain: 5.8 dBi | Connector: SMA (Female)

Radiation Pattern

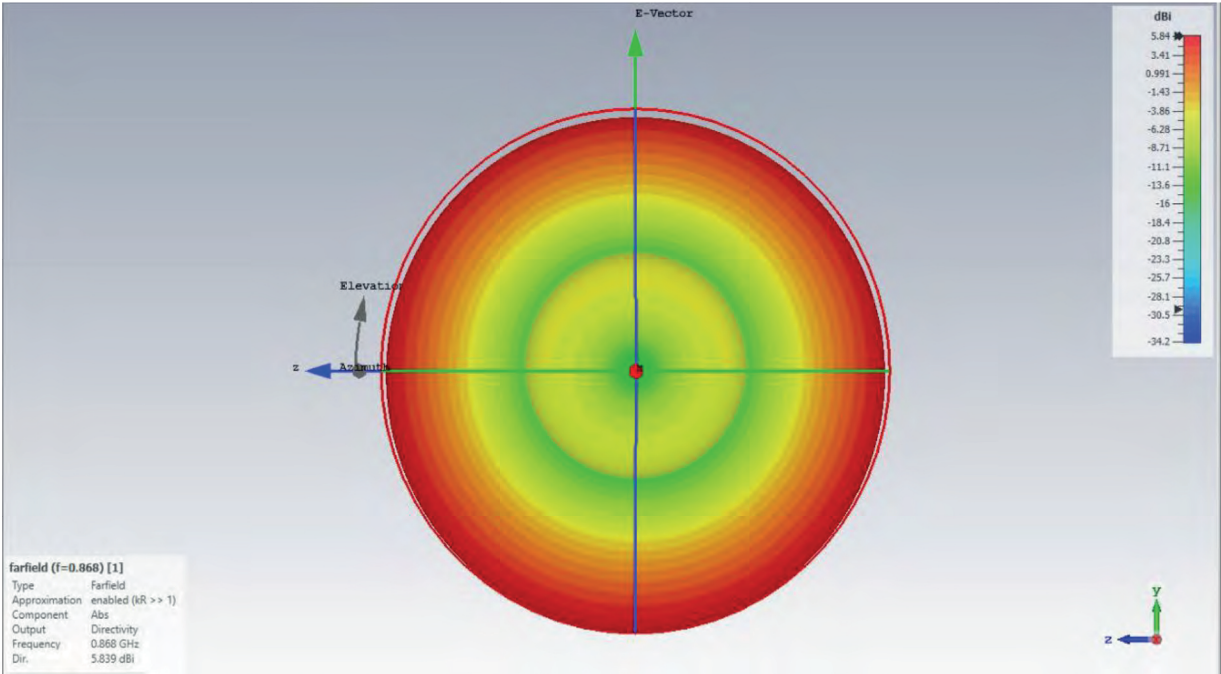

VSWR (Voltage Standing Wave Ratio)

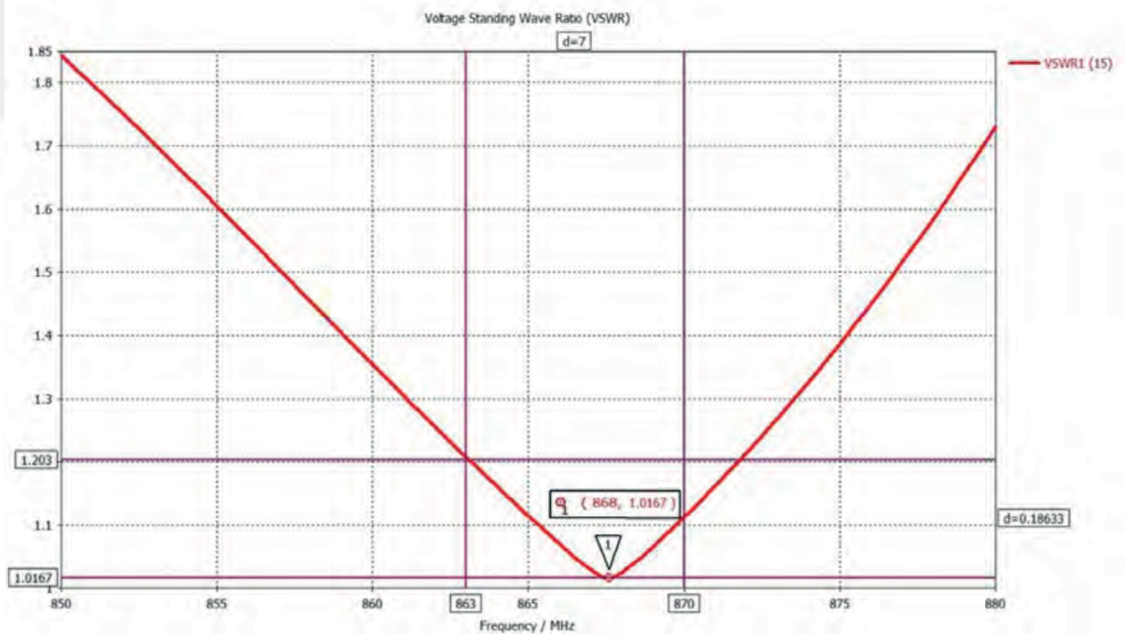

Disclaimer: All images are for reference purposes only

Important Notice: Information contained in this data sheet is believed to be reliable at the date of issue, however accuracy and completeness is not guaranteed. Boardoza holds the right to change the product specifications without notice.