
Perfectub® BKTB-300-LH • 60" x 32" alcove tub

Two inches wider than the original 30" model, with more flat floor space and up to 15" of bathing depth to the linear overflow.

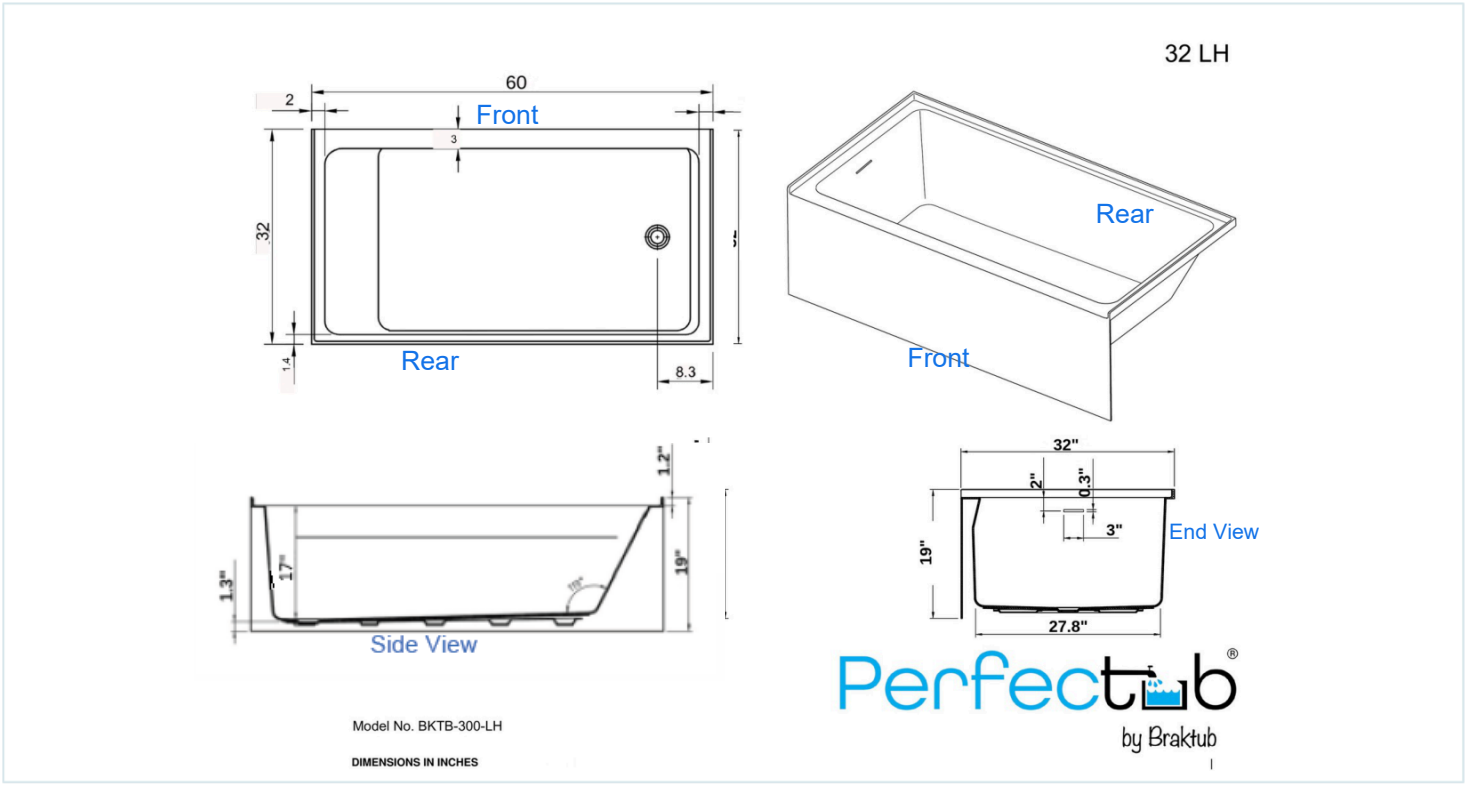

Drawing: Brak Tub cut sheet “BKTB-300-LH” (60" x 32", left-hand). Drain on the left when viewed from the front.

Dimensions & ordering

Spec	BKTB-300-LH
Length x width	60" x 32"
Overall height	19"
Step out height (in/out)	17"
Interior length to back slope	46"
Step-in: floor to top of apron	19"
Bathing width	26"
Bathing depth to linear drain	15"
Model No.	BKTB-300-LH
Accessibility	Meets ADA height requirements
Weight / Shipping Wgt.	Tub 105 lbs; Shipping Wgt. 180 lbs

Construction & installation

Item	Detail
Surface	High-gloss acrylic; fiberglass reinforced
Back ledge	1 1/4" steel rod reinforced; a 1/4" shim removes the back ledge
Bottom	Flat, solid, reinforced bottom. Wet mortar or foam bedding recommended on uneven/older floors
Waste & overflow	3 x .375" linear overflow drain (collector welded in place); adaptor, drain w/ toe-touch popup cap, included.
Flange	Nail or screw and washer at the top edge of the flange; putting holes in the tub will void the warranty.
Warranty	Limited lifetime (original residential buyer); 1 yr commercial; accessories 1 yr parts