



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

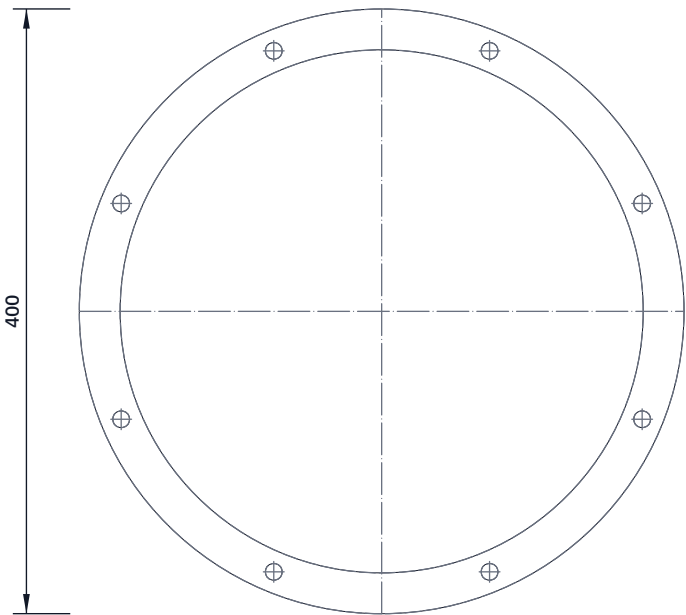


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

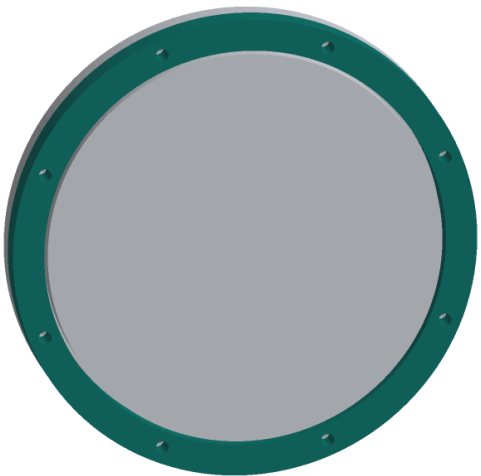

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Spacer: 400 OD x 346 ID from 25 mm plate

Clamp: 400 OD x 290 ID from 10 mm plate

Drill both together: 8 x 11 dia on a 373 circle, 22.5 deg start, matching the tapped holes in the window flange

The spacer sets the gap: gasket 6 mm squeezed to 5 plus window 20

The clamp ring overlaps the window rim by 25 all round

Deburr; paint all faces except the face that touches the window

Check: rings sit flat together; holes line up with the flange

ALTIRIG

github.com/BoujeeEnjinia1701/altirig

AltIRig window spacer and clamp rings

DRAWING NO. ALR-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 25 and 10 thick					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	