
CONCEPT, NOT FOR FABRICATION


BankHaul · github.com/BoujeeEnjinia1701/bankhaul

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	BKH-DDR-002: design for construction	2026-10-03	AC
P3	BKH-DDR-003: far stake 5.0 m long, driven 3.5 m (decision 14A)	2026-10-03	AC
P4	Kit 1.9 D3 model; D-S1 pad eye 64 radial; D-S3 stays 1,110 between thimbles	2026-10-25	AC



TOP VIEW

Scale 1:50; looking down (along -Z)

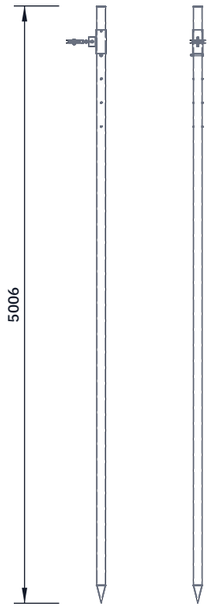

FRONT VIEW

Scale 1:50; looking at the front (along +Y)

RIGHT VIEW

Scale 1:50; looking at the right side (along -X)



ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Stake 76.1 x 3.6 S355 tube, 5,000 long overall with a 150 point; 33.2 kg (2)
Driven 3,500 into the bed; design water depth 1,000; top 500 above the water
Cap disc 6 thick takes the driving cap; never drive on the open tube
Five 12.5 holes at 200 pitch for the M12 stop pin (14)
Collar 88.9 x 3.2 x 200 turns on the stake and rests on the pin (3)
Collar lug 8 thick, 18 hole 75 from the stake axis
Far sheave 200 above the water at the design level (8, 13)
Move the pin up or down a hole to follow the season's water level
Lateral capacity: BKH-CAL-001, section E (factor 2.03 in very soft mud)
Third-angle; front view from -Y; the loop arrives from -X; (n) = BOM line

BANKHAUL

github.com/BoujeeEnjinia1701/bankhaul

Far end: stake, swivel collar and far block, general arrangement

DRAWING NO.	REV	SHEET	SIZE
BKH-DWG-002	P4	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:50	mm		2026-10-03	Amish Chadha

MATERIAL / NOTES

Steel tube S355 per bom/bom.csv; bought block and shackle. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand