


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Finish note added (decided 2026-10-02)	2026-10-02	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

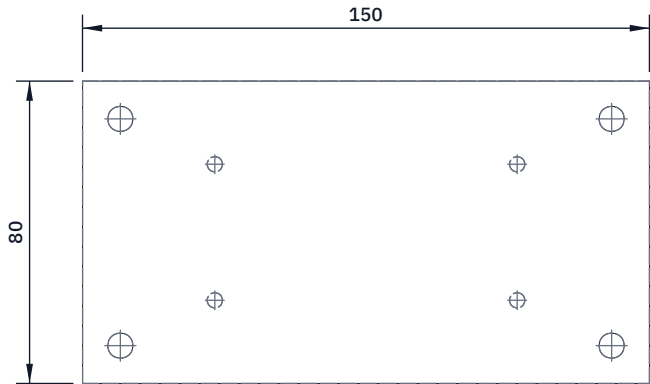


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

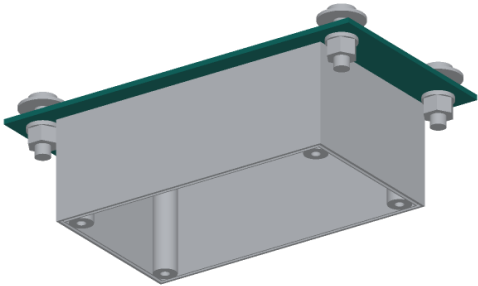

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 150 x 80 mm, 2 mm 5052 aluminium, square. Round the corners about 3 mm and deburr every edge.

Measure from the centre lines. The face that goes against the bin lid is the top face; the box hangs under the other face.

Bolt holes: four 6.6 mm at 65 mm each side of the long centre line and 30 mm each side of the short one (130 x 60).

Stud holes: four 4.2 mm at 40 mm and 18 mm each side (80 x 36). Check the hole size on the stud maker's sheet.

Press the four M4 x 12 flush-head studs in from the top face with a press or a vice with smooth jaws, until the heads sit flush.

Fit: top face flat on the lid underside; the box base sits flat on the lower face, the studs through its floor.

Check: studs square to the plate, heads flush, none turns by hand.

Finish: prototype, none. Deployments: anodise before pressing in the studs.

BinLevel bracket plate: making sketch

DRAWING NO. BNL - DWG - 101			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 2 mm, 5052 class; four M4 x 12 flush-head press-in studs					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand