


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW

Scale 2:1; looking down (along -Z)

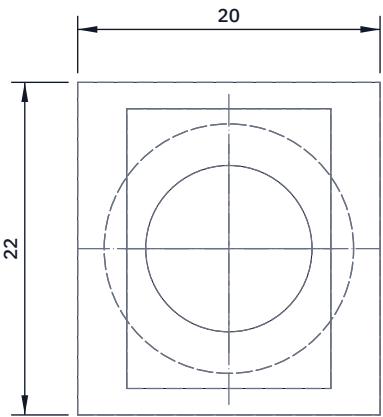


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

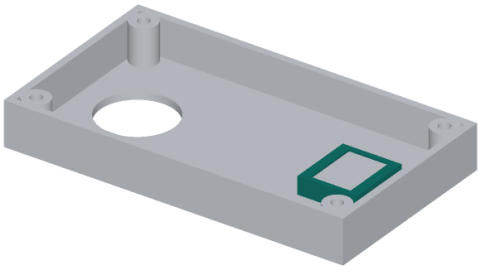

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Block 20 x 22 x 6 mm, printed flat in ASA, 100 % infill.

Through it: an 11 mm light hole on its centre.

Underneath: a 16.5 mm recess 1.5 mm deep for the window disc.

On top: a 13.5 x 18.5 mm pocket 2 mm deep for the ToF breakout, with two 1.8 mm holes for M2 screws at the breakout's holes.

Window: a 16 mm disc of 1.5 mm clear PMMA or glass, cut with a hole saw or bought; keep its film on until fitting.

Fit: window in the recess with a thin ring of neutral-cure silicone on its face; holder centred over the 11 mm cover hole and bonded to the floor with plastics epoxy. Breakout in the pocket, sensor down onto the window, held by two M2 screws.

Check: looking in from outside, the sensor is centred in the hole.

BINLEVEL

github.com/BoujeeEnjinia1701/binlevel

BinLevel ToF holder and window: making sketch

DRAWING NO. BNL - DWG - 106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES ASA, 3D printed; window 16 mm x 1.5 mm PMMA or glass					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand