


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

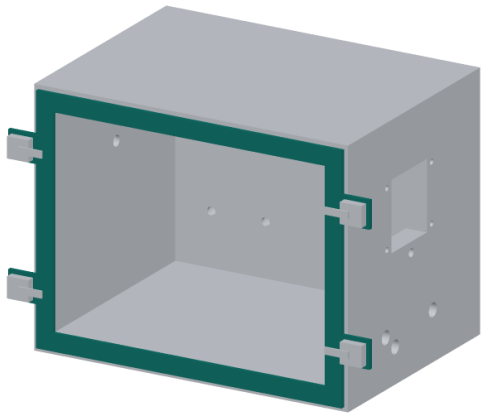

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Laser cut from 6 mm acrylic: 450 x 350 outside with a 400 x 300 window in the middle (the chamber opening).
Four latch tabs 41 wide x 40 tall stand out from the sides, centred 95 above and 95 below the window's centre line.
Mark each latch's screw holes through the latch; drill 3 mm.
Fit: solvent weld the frame to the shell's front edges, window lined up with the inside of the shell all round. The frame overlaps the jacket's front edges by 19 mm and stands 6 mm clear of the base plate.
The door gasket sits on the frame's front face, 4 to 12 mm outside the window.
Check: the frame is flat; a straight edge shows no gap over 0.5 mm.

CALRIG

github.com/BoujeeEnjinia1701/calrig

CalRig front frame: making sketch

DRAWING NO. CLR-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Cast acrylic sheet 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand