



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

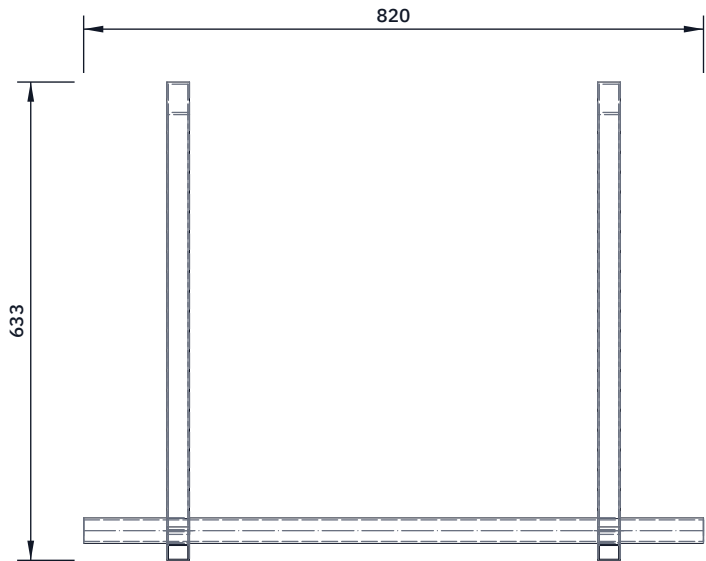


TOP VIEW

Scale 1:10; looking down (along -Z)

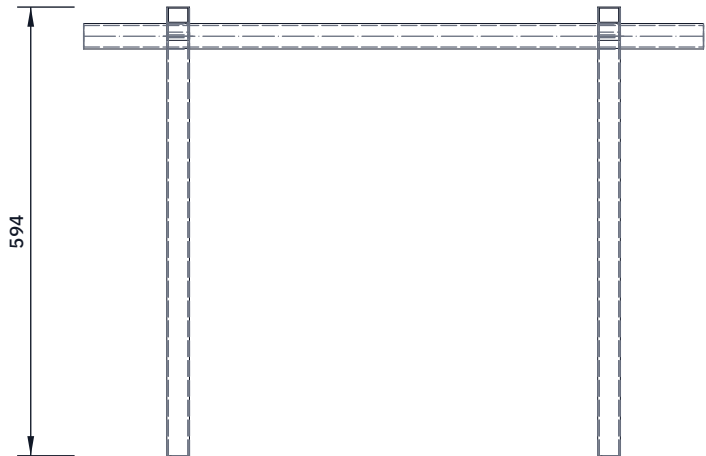


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

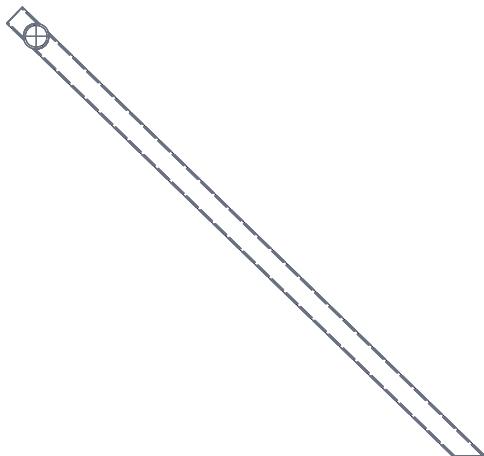

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

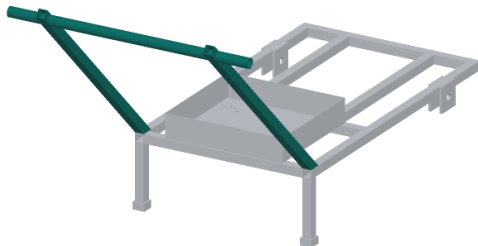

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Arms: two 30 mm tubes about 800 long, cut at 44 deg at the foot so they sit flat on the rail tops, the foot end against the front cross member.

Cope the top end of each arm to the 33.7 mm bar (a saddle cut).

Cross bar: 33.7 x 2.6 mm tube 820 long, 800 above the ground and 550 in front of the rail front ends; the arms meet it 125 from each end.

Grips: 95 mm rubber grips on both bar ends, pushed on with soapy water.

Tack the arms to the frame in a jig, check, then weld all round.

Check: bar level within 3 mm and square to the cart centre line.

CAMPBREAK

github.com/BoujeeEnjinia1701/campbreak

CampBreak pull handle (two arms and a cross bar): making sketch

DRAWING NO. CBK-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 30 x 30 x 2 mm square tube; 33.7 x 2.6 mm tube; S235					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand