




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

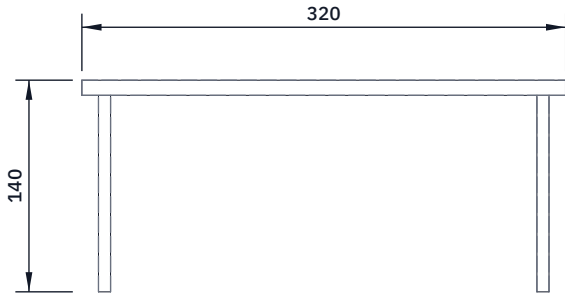


TOP VIEW
Scale 1:5; looking down (along -Z)

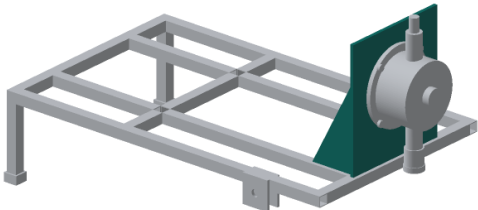

WHERE IT GOES
This part in colour, its neighbours in grey

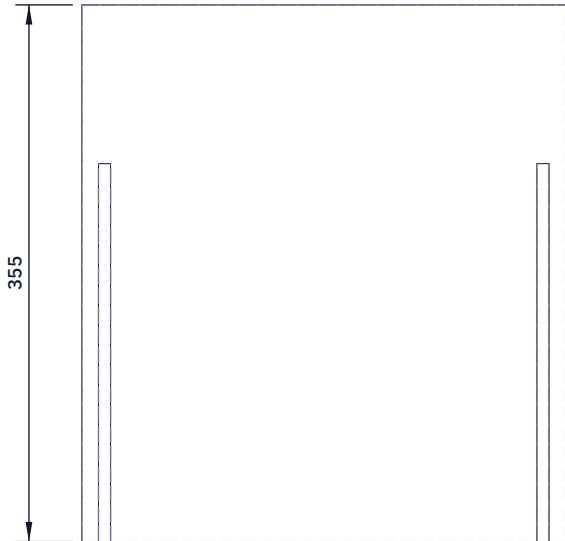

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

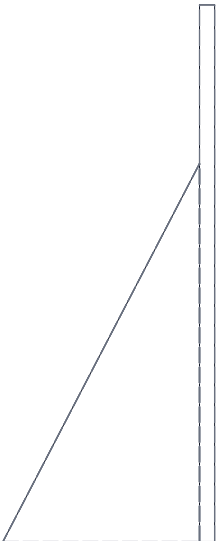

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

HOW TO MAKE IT AND HOW IT FITS

Plate: 320 wide x 355 tall x 10 mm. Mark its centre line.

Pump holes: four 13 mm holes on a 150 mm square, centred on the centre line 195 up from the bottom edge (the pump shaft height).

Check the square against the pump flange before drilling.

Gussets: two 8 mm right triangles, 130 along the bottom and 250 tall.

Fit: the plate stands on the rear cross member, its front face 10 behind the member's front face, square to the bearers. The gussets sit on the bearer tops, centred on them, against the plate front.

Weld the plate to the cross member both sides; weld each gusset to the bearer and the plate.

Check: plate upright within 1 deg; holes clear of the gusset welds.

CAMPBREAK				github.com/BoujeeEnjinia1701/campbreak			
CampBreak pump stand plate and gussets: making sketch							
DRAWING NO. CBK-DWG-103			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES 10 mm plate 320 x 355 mm; two 8 mm gussets; S235							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							