



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

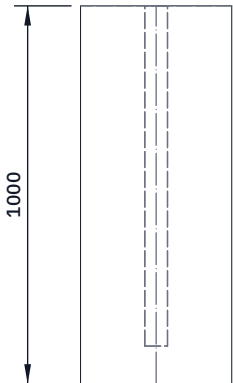


FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Hole 400 dia x 1,000 deep, centre 1,000 back from the coping; keep it clear of the lining and any drains.

100 of concrete under the post; post bottom 900 down.

Crown the top 10 to 20 above ground so water runs off.

Saturated or soft bank: use 500 dia x 1,200 deep and a 2,300 post (calculation note, G5).

Fits: concrete wraps the bottom 900 of the post and fills its bottom end.

Check: post plumb in both directions within 5 over 1 m.

CANALRUNG

github.com/BoujeeEnjinia1701/canalrung

Concrete footing: making sketch

DRAWING NO. CNR-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 25 MPa concrete, about 0.12 m3 (about 12 bags of 25 kg)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	