



CONCEPT, NOT FOR FABRICATION

CargoMule · github.com/BoujeeEnjinia1701/cargomule

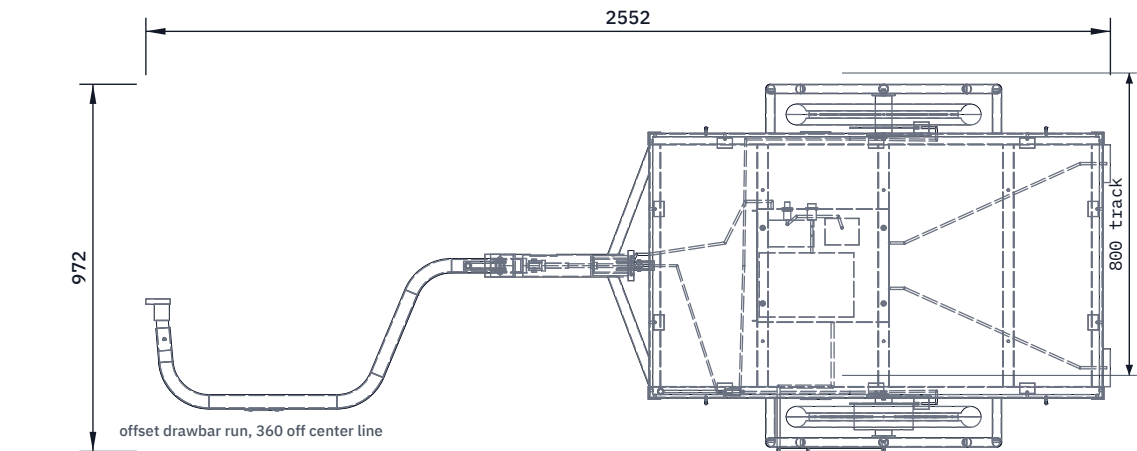


TOP VIEW

Scale 1:20; looking down (along -Z)

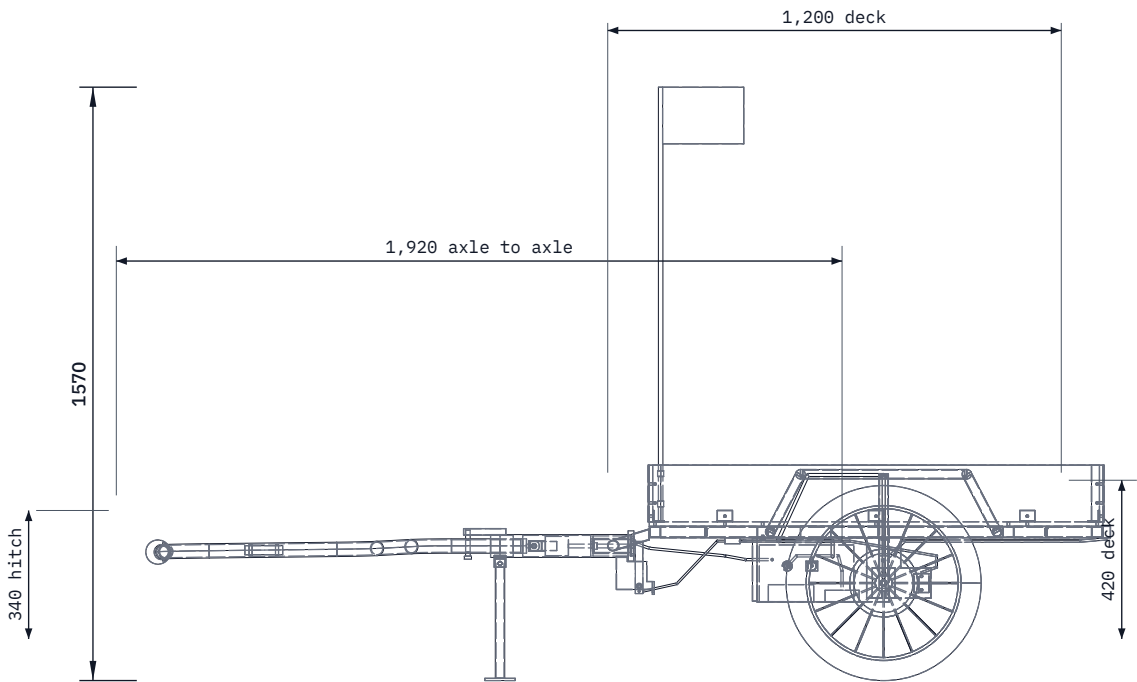

FRONT VIEW


Scale 1:20; looking at the front (along +Y)

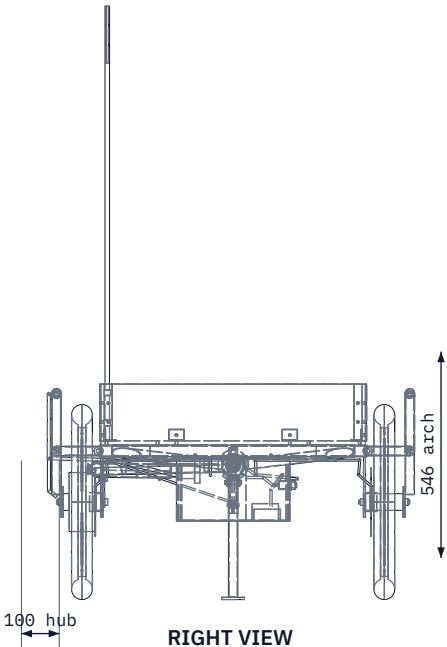

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	180 mm rotors, metallic pads (CGM-DDR-002)	2026-09-25	AC
P3	Layout and labels tidied	2026-09-25	AC
P4	Design for construction (CGM-DDR-003)	2026-10-01	AC
P5	Key switch, charge socket, drawbar reflector	2026-10-02	AC

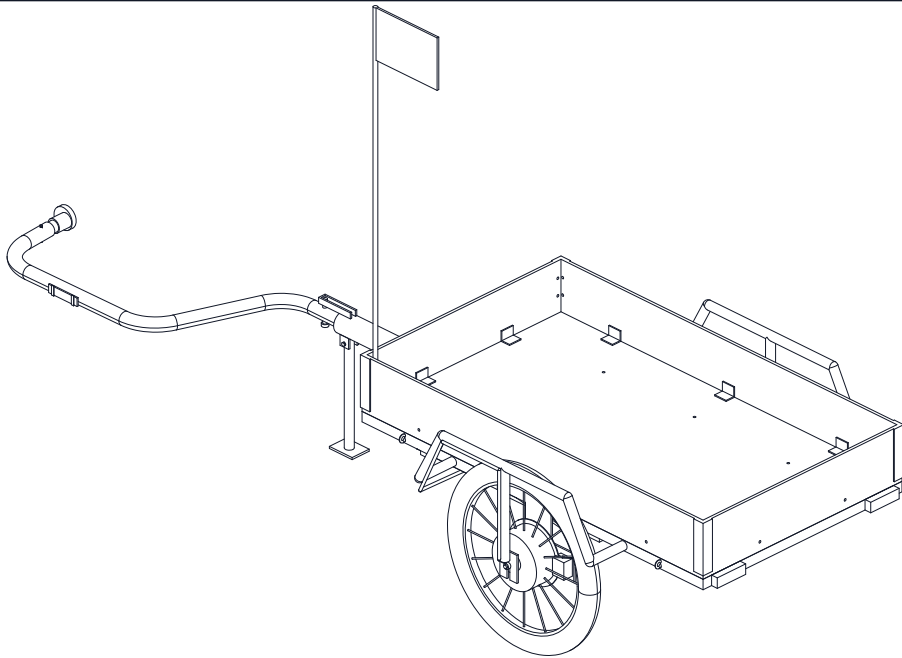

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- Wheels 20 in (ETRTO 406), 100 mm hubs; dropout faces 350 and 450 off center
- Disc brakes both wheels, 180 rotors, metallic pads
- Deck 1200 x 700 x 12 plywood at Z 420; axle 20 behind deck center
- Frame 30 x 30 x 1.5 box; drawbar 38 x 2.5 tube
- Hitch point X 0, Y -95, Z 340 (bike left axle end)
- Coupler housing X 880 to 1259; load cell inside, X 1025 to 1086
- Coupler stroke 50; brake lever 7.7 to 1
- Enclosure 350 x 300 x 170, X 1585, door at front
- Key switch (19 hole) and charge socket (24 hole) in enclosure right wall, X 1665 and 1730
- Ground clearance 208 under enclosure; tyre to rail 22.5
- Empty about 46 kg; hitch load about 7.5 kg (CGM-CAL-001)
- Third-angle; front view from -Y; X rearward from bike axle

CARGOMULE

github.com/BoujeeEnjinia1701/cargomule

General arrangement

DRAWING NO. CGM-DWG-001			REV P5	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha	

MATERIAL / NOTES
S235 box frame, S355 drawbar; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION