



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

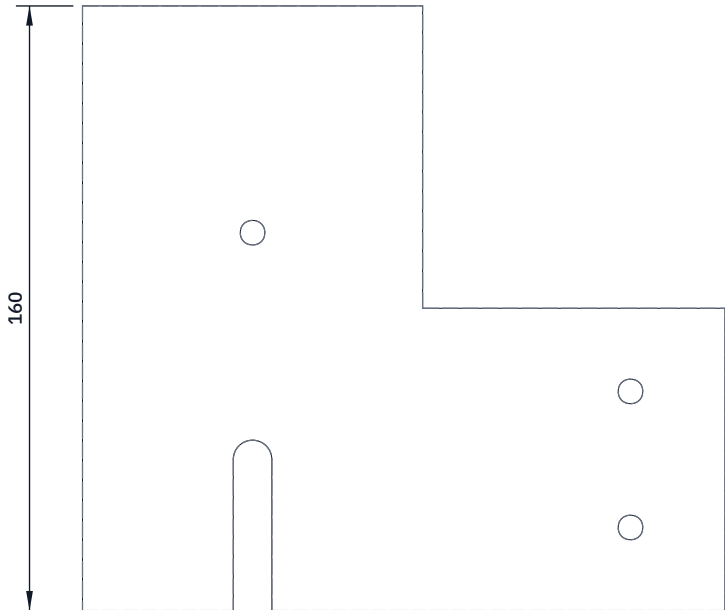


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

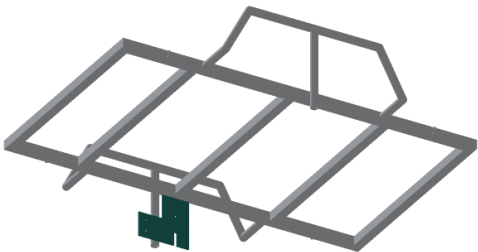

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Inner plates (2): 170 x 80 mm at axle height with a 90 mm

wide upper part up to the side rail, 160 mm tall in all.

The axle sits 45 mm from the plate's front edge.

Axle slot 10.2 mm wide, 40 mm deep up from the bottom edge,

round-ended at the axle centre. File it to fit the axle flats.

Caliper tab: two 6.5 mm holes 100 mm behind the axle, 18 mm

above and below it; check against the adapter you buy.

Torque arm hole: 6.5 mm, 60 mm above the axle (left plate;

drill both so they match).

Outer plates (2): 60 x 80 mm, the same slot, welded to the

arch strut's foot.

Weld the inner plates under the side rails with their inner

faces 350 mm from the centre line; outer plates' inner faces

450 mm: the 100 mm hub fits between, axles in line.

Check: a straight 10 mm bar drops into all four slots at once.

CARGOMULE

github.com/BoujeeEnjinia1701/cargomule

CargoMule dropout plates (make 4): making sketch

DRAWING NO.

CGM-DWG-104

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:2

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Steel plate 5 mm, S235