



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:5; looking down (along -Z)

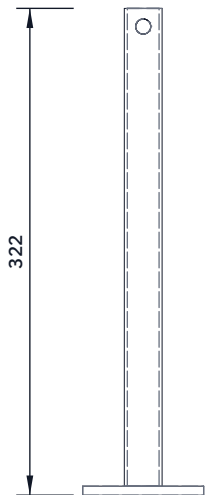


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

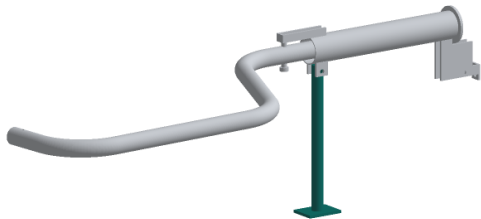

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Leg: 316 mm of 25 x 2 mm steel tube.
- Cross hole 10.2 mm, 12 mm from the top end.
- Foot: 80 x 60 x 6 mm plate welded square on the bottom end.
- Fit: in the clevis under the coupler housing's front on an M10 bolt with a nyloc nut, snug so it stays where it is put.
- Down, it holds the housing's axis 356 mm above the ground, level with a bicycle's rear axle.
- Up, it folds back under the housing and is held by a rubber strap. Fold it up before riding.
- Check: down, the trailer stands level and does not rock.

CargoMule parking stand: making sketch

DRAWING NO. CGM-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube 25 x 2 mm; plate 6 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand