



CONCEPT, NOT FOR FABRICATION

CellCheck · github.com/BoujeeEnjinia1701/cellcheck

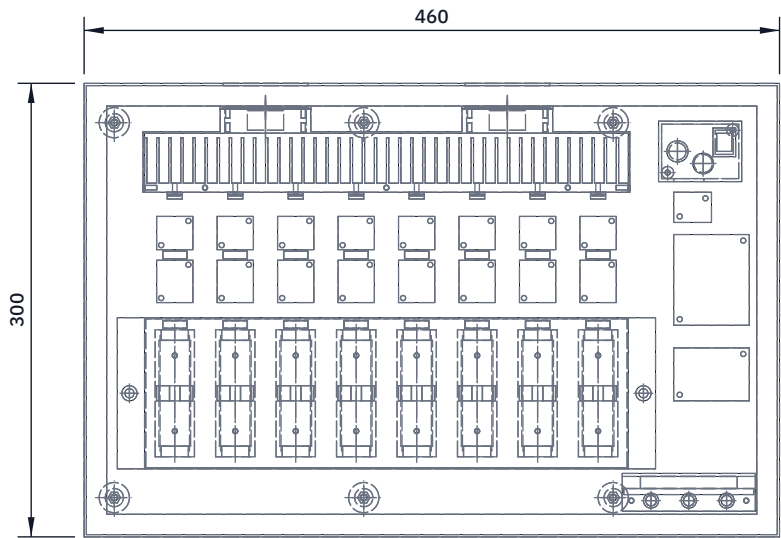


TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW


Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA (CCK-CAL-001, CCK-DDR-001)	2026-09-25	AC
P2	Constructable design: feet, standoffs, fixings (CCK-DDR-003)	2026-10-01	AC
P3	Fan finger guards, silicone-sealed wire slots (CCK-DEC-001)	2026-10-02	AC

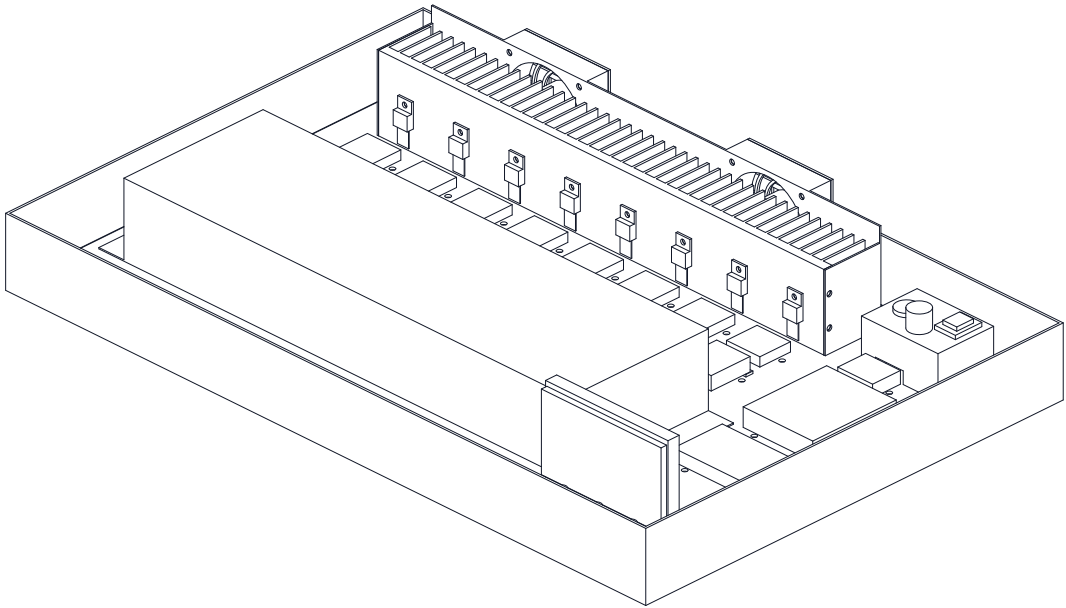

ISOMETRIC VIEW

Not to scale; the cells sit under the perforated guard; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS AND INTERFACES (MM)

Unit envelope 460 x 300 x 85 on six 8 mm rubber feet
Tray 1.5 steel, liner 3; plate 1.5 Al on six 12 mm standoffs
8 channels at 40 pitch, channel 1 at x -170; cells along Y
Holders take 18650 and 21700 (to 70 long, 21 dia), four-wire
Guard 320 x 100 x 48.5; two M4 thumb screws
Heatsink 320 x 36 x 50: 40 fins at 8 pitch
2 fans 60 mm, finger guards, on a folded shroud on the spine ends
Fan intake slots 56 x 22 in tray back wall
16 wire slots in the plate, silicone sealed
12 V DC inlet only, 6.3 A fuse; 3 A fuse per cell
Watchdog and 2.5 V comparator board (item 18)
Rest rack (48 cells) and adapter stand beside the tray
Mass about 4.94 kg without adapter (CCK-CAL-001)
PRELIMINARY, NOT FOR FABRICATION

CELLCHECK

github.com/BoujeeEnjinia1701/cellcheck

General arrangement, eight-channel grader

DRAWING NO. CCK-DWG-001		REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Tray 1.5 mm steel; plate 1.5 mm Al; heatsink Al; guard 0.8 mm perforated steel. See bom/bom.csv				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	