
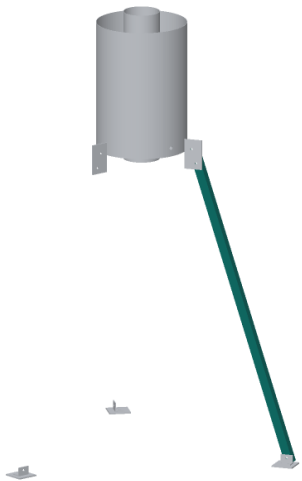
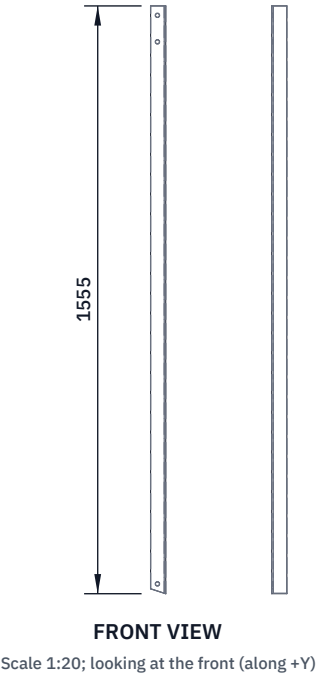


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut three lengths of 40 x 40 x 4 angle, 1555 mm on the longest edge (drawn upright). Cut the lower end 18 degrees off square so it stands level when the leg leans 18 degrees in; the upper end is cut square.

Three 11 mm holes in one face of the angle (the flat face), 18 mm from its free edge, measured along the leg from the lower end: foot pin 19 mm; fin bolts 1453 and 1523 mm.

Drill the three legs clamped together so the holes match.

Fit: the flat face lies on a jacket fin (two M10 bolts) and on a foot cleat (one M10 bolt, a pin). The other face points away from the jacket.

Check: hole centres within 1 mm of the figures.

CHARCUBE				github.com/BoujeeEnjinia1701/charcube			
CharCube tripod leg (make 3): making sketch							
DRAWING NO. CCB-DWG-110			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:20		UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Steel equal angle 40 x 40 x 4 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							