




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

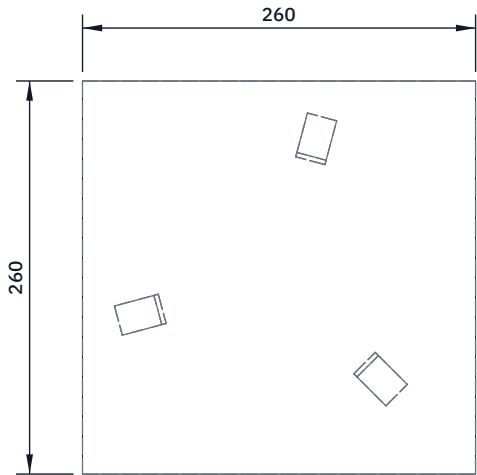


TOP VIEW
Scale 1:5; looking down (along -Z)

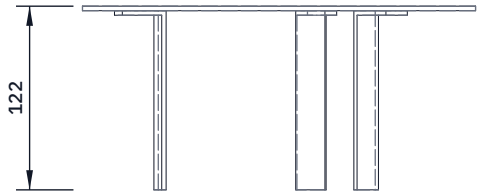

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

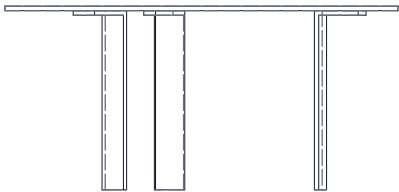

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

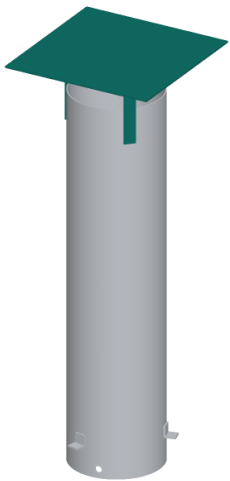

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cap: a 260 mm square of 3 mm sheet; round the corners.

Legs: three 145 mm lengths of 20 x 3 mm flat bar, each bent 90 degrees 30 mm from one end to make a foot.

Fit: rivet each leg's long part to the outside of the flue top, 120 degrees apart, two 4.8 mm rivets, so the bent feet stand 56 mm above the flue's top edge. Rivet the cap onto the feet. The cap's underside sits about 58 mm above the outlet: never less, or it chokes the draft.

Check: the gap under the cap is the same all round.

CHARCUBE			github.com/BoujeeEnjinia1701/charcube		
CharCube rain cap and its legs: making sketch					
DRAWING NO. CCB-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel sheet 3 mm; flat bar 20 x 3 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		