



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

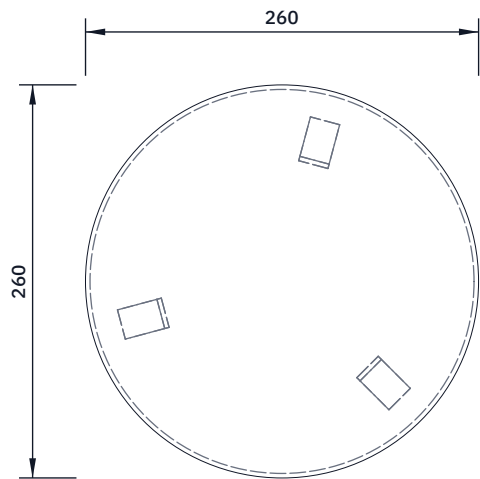


TOP VIEW

Scale 1:5; looking down (along -Z)

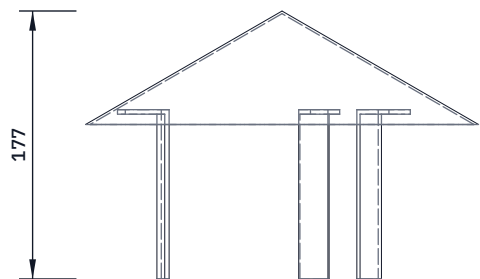


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

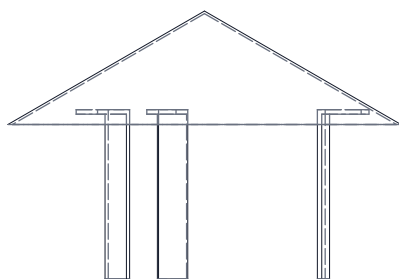

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

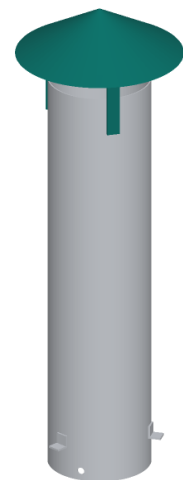

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cap: cut a 300 mm disc from 1.5 mm sheet (150 mm radius). Cut out a 48 degree wedge to the centre, roll the rest into a cone 260 mm across with a 30 degree slope, and rivet the overlap (three rivets).

Legs: three 142 mm lengths of 20 x 3 mm flat bar, each bent 90 degrees 30 mm from one end to make a foot.

Fit: rivet each leg's long part to the outside of the flue top, 120 degrees apart, two 4.8 mm rivets, so the bent feet stand 52 mm above the flue's top edge. Rivet the cap to the feet.

The shortest gap from the flue's top edge to the cap is 60 mm: never less, or it chokes the draft.

Check: the gap under the cap is the same all round.

CHARCUBE

github.com/BoujeeEnjinia1701/charcube

CharCube conical rain cap and its legs: making sketch

DRAWING NO. CCB-DWG-113		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Mild steel sheet 1.5 mm; flat bar 20 x 3 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	