



CONCEPT, NOT FOR FABRICATION

CityTwin · github.com/BoujeeEnjinia1701/citytwin



TOP VIEW


Scale 1:25; looking down (along -Z)

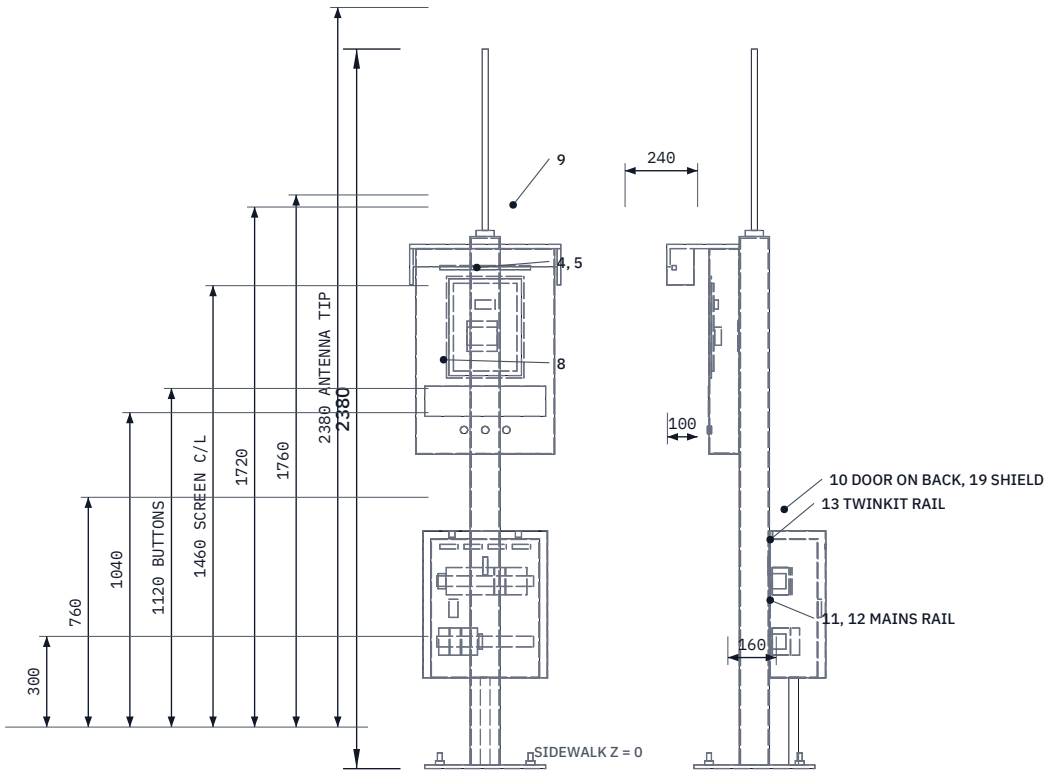

FRONT VIEW

RIGHT VIEW

Scale 1:25; looking at the front (along -Y) Scale 1:25; looking at the right side (along -X)

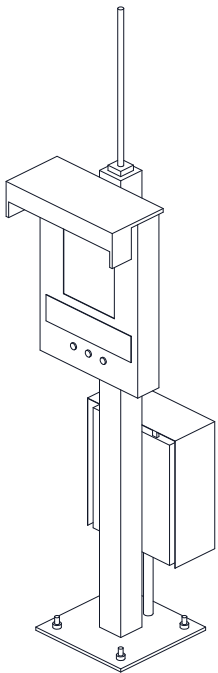

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- 2 post 100 x 100 x 4 SHS; 1 base 400 x 400 x 12, 4 x M16 on 300 sq
- 3 head 460 x 100 x 680, 2 mm aluminum, IP54 target
- 4 window 240 x 320 opening, 6 mm PC; 5 active area 202.8 x 270.4
- 7 three 19 mm buttons at 70 pitch; reach range 380 to 1,220
- Overhang beyond post 200 max (305 allowed on posts)
- 10 cabinet 360 x 160 x 460, IP55; two TS35 rails 320 long
- 19 sun shield (outdoor sites) 413 wide, 1.5 mm aluminum, 25 gap, open bottom
- Upper rail: TwinKit per TWK-DWG-001, 294 used; lower: RCBO, SPD, 12 V 60 W
- Mains only in the cabinet; 12 V SELV and Ethernet up the post
- 14 coax from TwinKit SMA bulkhead to post-top antenna
- Wind 35 m/s x 1.5: post 26.9 MPa; 1.97 kN per anchor (CTW-CAL-001 v0.2)
- Third-angle; front view from -Y (reading side)

CITYTWIN

github.com/BoujeeEnjinia1701/citytwin

General arrangement, public kiosk

DRAWING NO. CTW-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:25	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Steel post and plate, aluminum head; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	