

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:10; looking down (along -Z)



FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

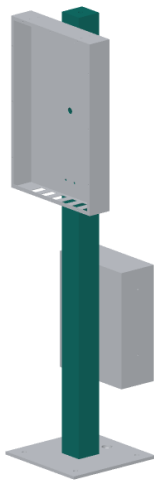

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut the tube 1,742 mm long, square ends; weld a 100 x 100 x 6 cap on top (20 mm coax hole, four M5 tapped holes at 20 each way).

Heights below are from the sidewalk; the tube starts 12 mm up.

Front wall (head side): four 11 mm holes 25 mm each side of center at 1,100 and 1,660; one 25 mm cable hole at 1,380.

Back wall (cabinet side): four 11 mm holes 25 mm each side at 360 and 700; one 25 mm cable hole at 735.

Countersink the 11 mm holes 90 degrees for flush rivet nuts.

Weld to the base plate, then hot-dip galvanize and powder coat.

After coating: set eight M8 flush steel rivet nuts; clean the threads; deburr the cable holes and fit grommets.

Check: an M8 screw runs into every rivet nut by hand.

CITYTWIN			github.com/BoujeeEnjinia1701/citytwin		
CityTwin post: making sketch					
DRAWING NO. CTW-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel SHS 100 x 100 x 4 mm and 6 mm cap plate					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		