



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

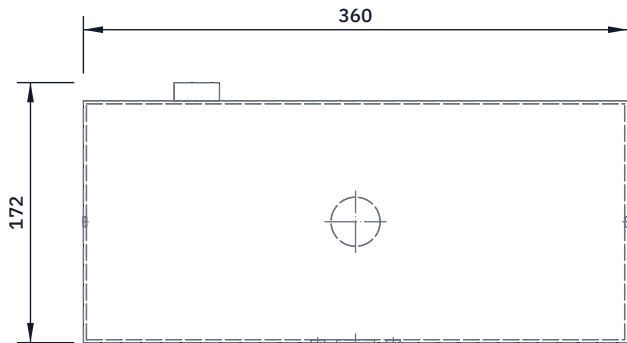


TOP VIEW

Scale 1:5; looking down (along -Z)

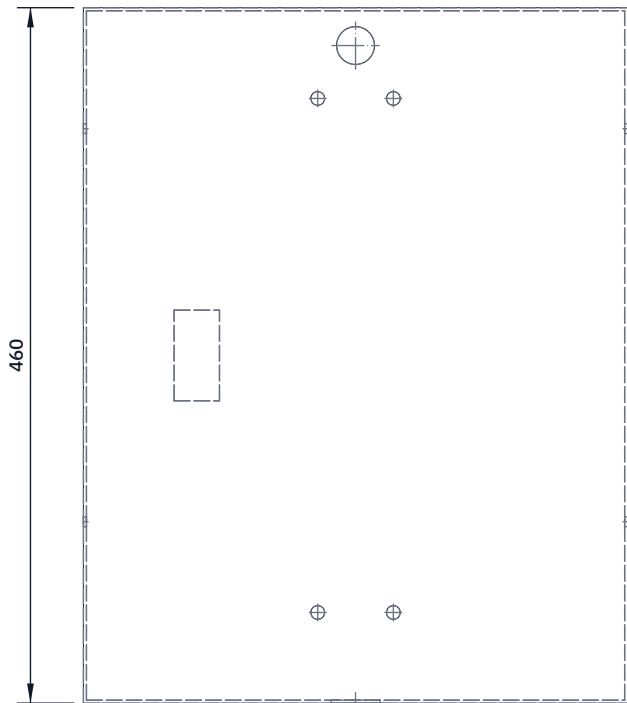


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

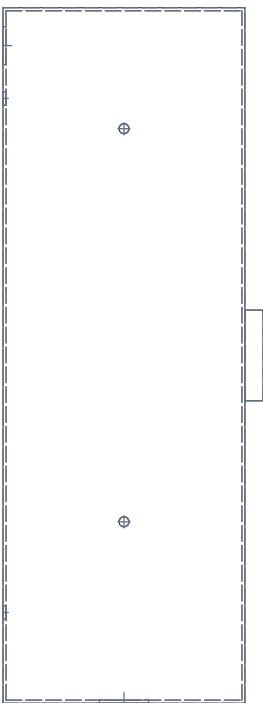

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

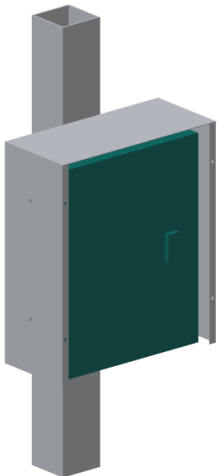

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Remove the mounting plate before drilling; protect the inside.
Wall against the post (the face opposite the door), heights from the cabinet's bottom edge: four 9 mm holes 25 mm each side of center at 60 and 400; one 25 mm cable hole at 435.
Floor: one 32.5 mm gland hole on the center line, mid-depth.
Sides, outdoor sites only: two 6.5 mm holes each side at mid-depth, 120 and 380 up, for the sun shield standoffs.
Deburr; touch up the paint on every cut edge.
Check: with the cabinet held on the post, every 9 mm hole lines up with a rivet nut and the cable holes line up.

CITYTWIN			github.com/BoujeeEnjinia1701/citytwin		
CityTwin services cabinet: drilling sketch					
DRAWING NO. CTW-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES Bought steel cabinet 360 x 160 x 460 mm, IP55					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		