


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:1; looking down (along -Z)




FRONT VIEW

Scale 1:1; looking at the front (along +Y)

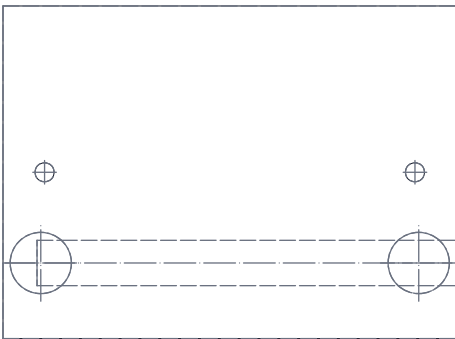

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

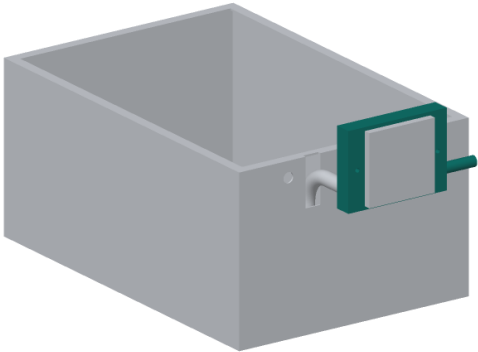

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Mill a block 10 x 60 x 44 mm; lap the front face flat (Peltier side).

Back face (against the shell): two tube sockets 8.1 mm, 5 deep, 25 each side of centre, 10 up from the bottom edge.

Condensing passage: 6 mm, drilled from the back-side end face, 5 mm in from the back face and 10 up, through both sockets.

Front face: two M3 tapped holes 8 deep, 24.5 each side, 22 up.

Join the loop tails into the sockets and a 6 mm copper charge stub into the passage mouth with aluminium-to-copper brazing rod.

After charging, the stub is pinched shut and brazed.

Fit: back face flat on the shell end, over the slot fillers; held by the block frame (CPD-DWG-109). Wrap its edges in foam tape.

Check: front face flat within 0.05 mm.

COLDPOD

github.com/BoujeeEnjinia1701/coldpod

ColdPod cold block: making sketch

DRAWING NO. CPD-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium 6061, 10 x 60 x 44 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	