




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

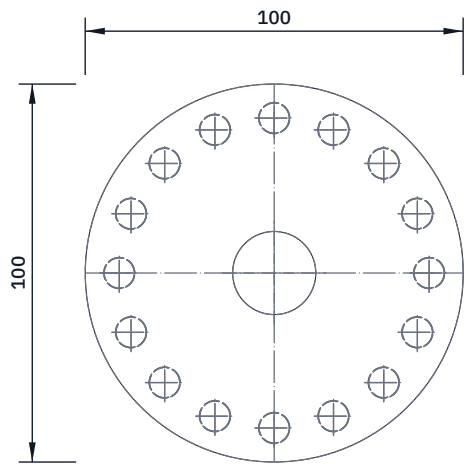


TOP VIEW
Scale 1:2; looking down (along -Z)

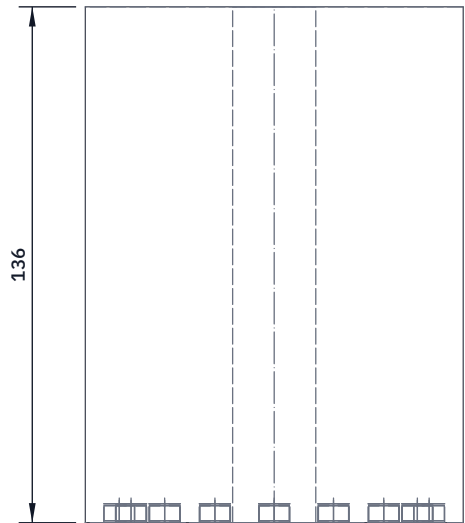

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

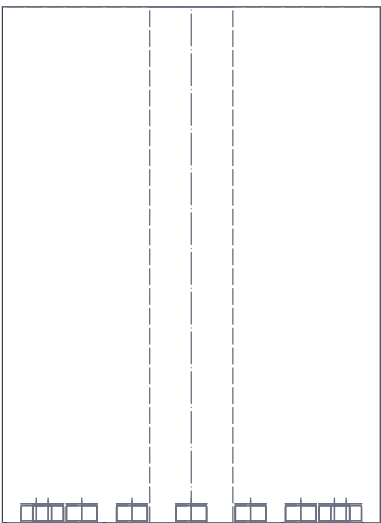

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

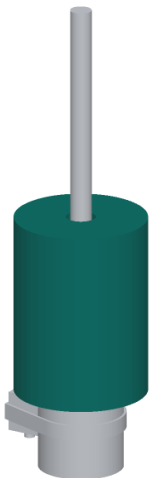

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Saw 140 mm of 100 mm bar. Bore 22 mm through.
Face both ends square; the lower face strikes the anvil.
Lower face: 16 pockets 8.2 mm diameter, 5 mm deep, equally spaced (22.5 degrees) on an 82 mm circle, all outside the 64 mm area that strikes the anvil.
Weigh, then face the top end down to 8.00 kg, within 10 g (about 136.5 mm long).
Bond a 8 x 4 mm N42 magnet in each pocket with epoxy, 0.5 mm below the face, every one with the same pole facing down.
Paint or oil the outside; keep the strike face bare.
Fit: slides on the upper rod (3 mm clearance all round) and falls 575 mm onto the anvil.
Check: 8.00 kg; slides freely the length of a 16 mm rod; no magnet stands proud of the face.

CONEPRO			github.com/BoujeeEnjinia1701/conepro		
ConePro drop hammer: making sketch					
DRAWING NO. CNP-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha	
MATERIAL / NOTES Steel round bar 100 mm, 1018 to 1045 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		