


CONCEPT, NOT FOR FABRICATION


ConePro · github.com/BoujeeEnjinia1701/conepro

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-10-02	AC




TOP VIEW

Scale 1:20; looking down (along -Z)

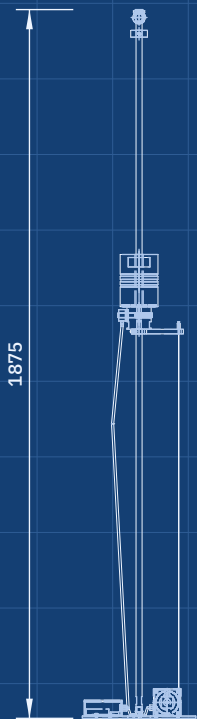


FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

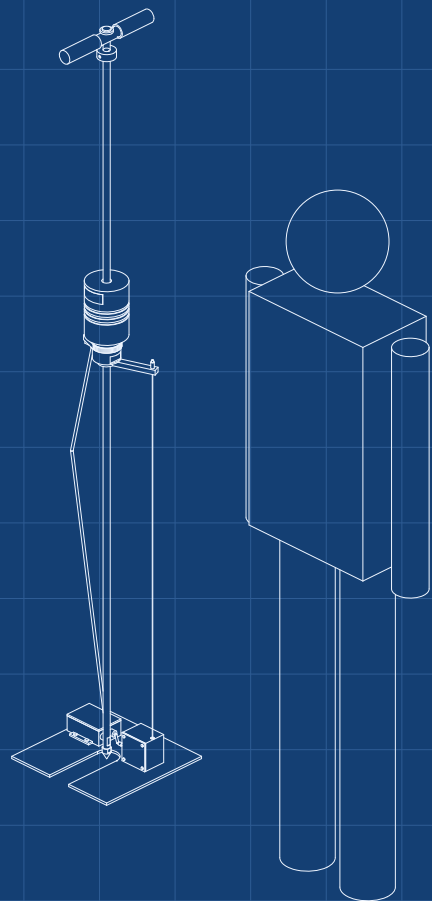

ISOMETRIC VIEW

Not to scale; figure is a 1.75 m person; seen from the front right and above, about 30 deg elevation

KEY FIGURES

ASTM D6951 geometry: 8 kg hammer, 575 mm drop

About 45 J per blow; 16 mm rod, 20 mm 60 deg cone

About 28 J at the cone (estimate, CNP-CAL-001)

Draw-wire depth: 0.05 mm resolution; 850 mm per rod

About 15.8 kg with bag; about \$346 in parts

CONEPRO

github.com/BoujeeEnjinia1701/conepro

Digital dynamic cone penetrometer concept

DRAWING NO.

CNP-DWG-010

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:20

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Massing model for concept communication

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand