REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

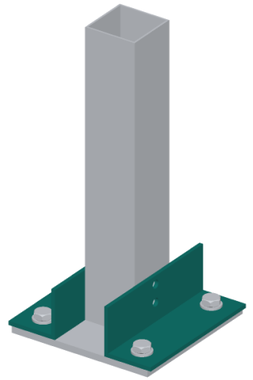

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make eight. Cut 220 mm lengths of 75 x 75 x 6 angle; deburr.
Upright leg: two 13 mm holes on the middle of the length (110 mm),
35 and 62 mm above the underside of the flat leg.
Flat leg: two 18 mm holes 40 mm out from the back of the upright
leg, 30 mm in from each end (160 mm apart).
Drill a pair together, clamped back to back, so the holes match.
Fit: one cleat each side of the post, upright legs flat on the
post's left and right faces (as seen from the street),
flat legs on the base plate. Two M12 bolts through cleat, post
and cleat; the anchors go through the flat legs and the plate.
Check: with both cleats on, the four flat-leg holes line up with
the plate's holes and the post's holes with the upright legs.

COOLSHADE github.com/BoujeeEnjinia1701/coolshade

CoolShade base cleat (make 8): making sketch

DRAWING NO.	REV	SHEET	SIZE
CSH-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-09-30	Amish Chadha

MATERIAL / NOTES

Galvanized equal angle 75 x 75 x 6 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand