
CONCEPT, NOT FOR FABRICATION


CoolShade · github.com/BoujeeEnjinia1701/coolshade

REV	DESCRIPTION	DATE	BY
P3	Concept sheet	2026-10-30	AC

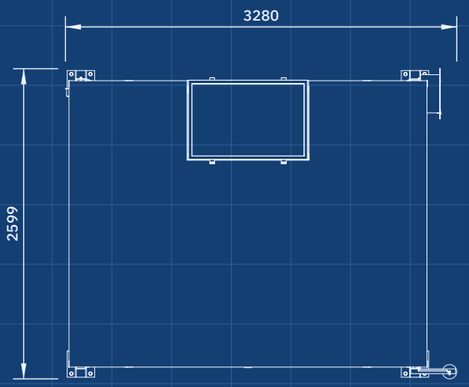


TOP VIEW

Scale 1:50; looking down (along -Z)

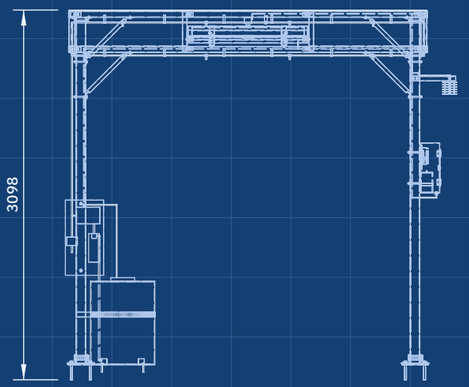


FRONT VIEW

Scale 1:50; looking at the front (along +Y)

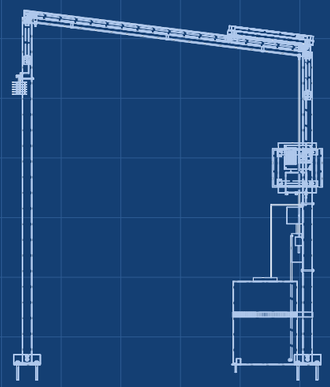

RIGHT VIEW

Scale 1:50; looking at the right side (along -X)

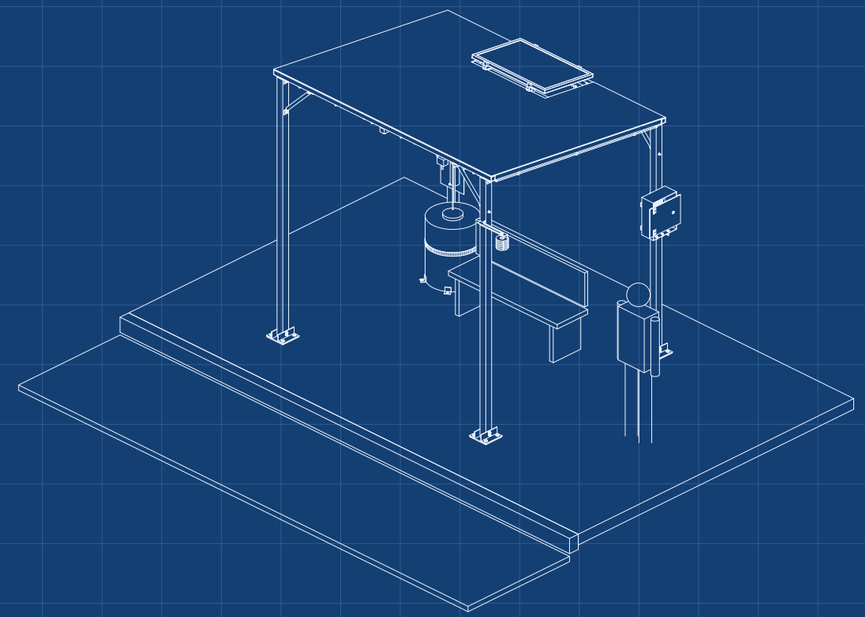

ISOMETRIC VIEW

Not to scale; figure is a 1.75 m person; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Shade roof 3.0 x 2.4 m (7.2 m2); headroom 2,223 mm minimum (CSH-CAL-001)
8 low-pressure nozzles at 7 bar, 32 L/h while spraying (nozzle data to confirm)
85 L water and 204 Wh per hot, dry day; 2.7 °C air cooling while spraying at 1 m/s
100 W panel, 12.8 V 25 Ah LiFePO4 (1.26 days); 12 V DC only, no mains
Mists only above 32 °C, below 60 % RH, with people present
Fabric on only in gusts below 15 m/s; USD 882 in parts (indicative), budget under review
D3 model: 372 parts, 284 fasteners, 233 kg (cad/fidelity.json)

COOLSHADE

github.com/BoujeeEnjinia1701/coolshade

Solar misting shade canopy concept

DRAWING NO.	REV	SHEET	SIZE
CSH-DWG-010	P3	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:50	mm		2026-10-30	Amish Chadha

MATERIAL / NOTES

Massing model for concept communication

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand